

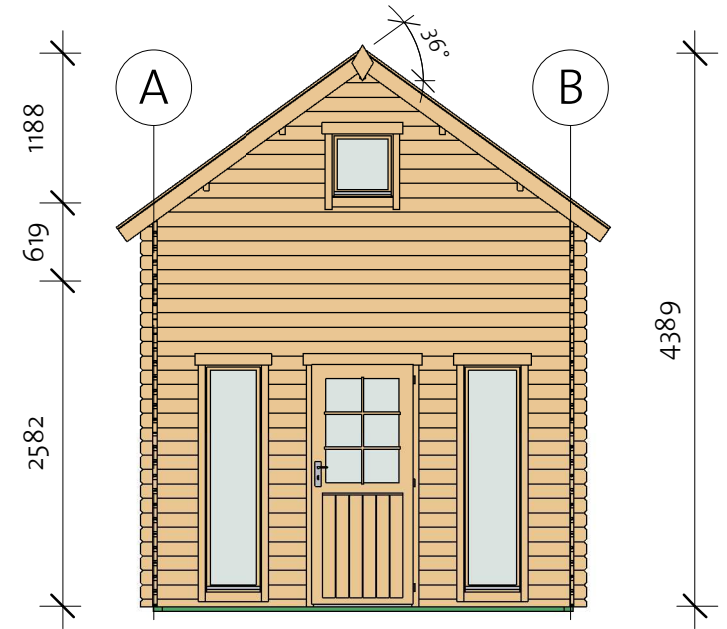



Colwood Bunkie 34 (335x299)

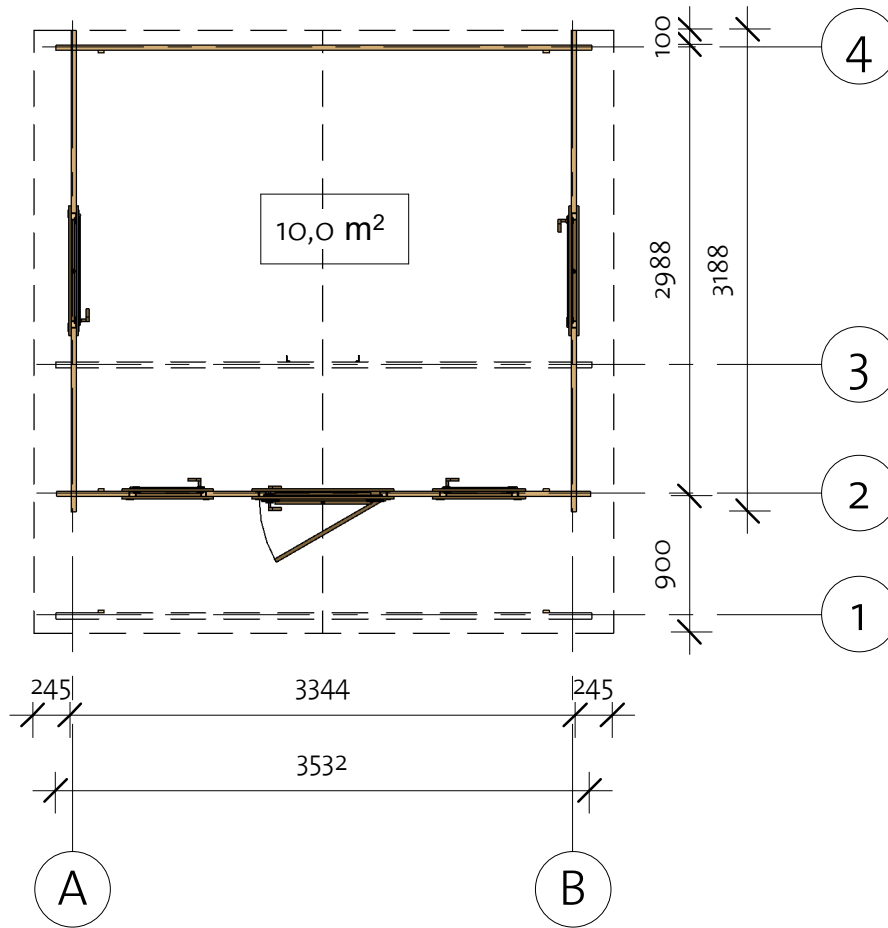

Colwood Bunkie 34 (335x299)



Foundation

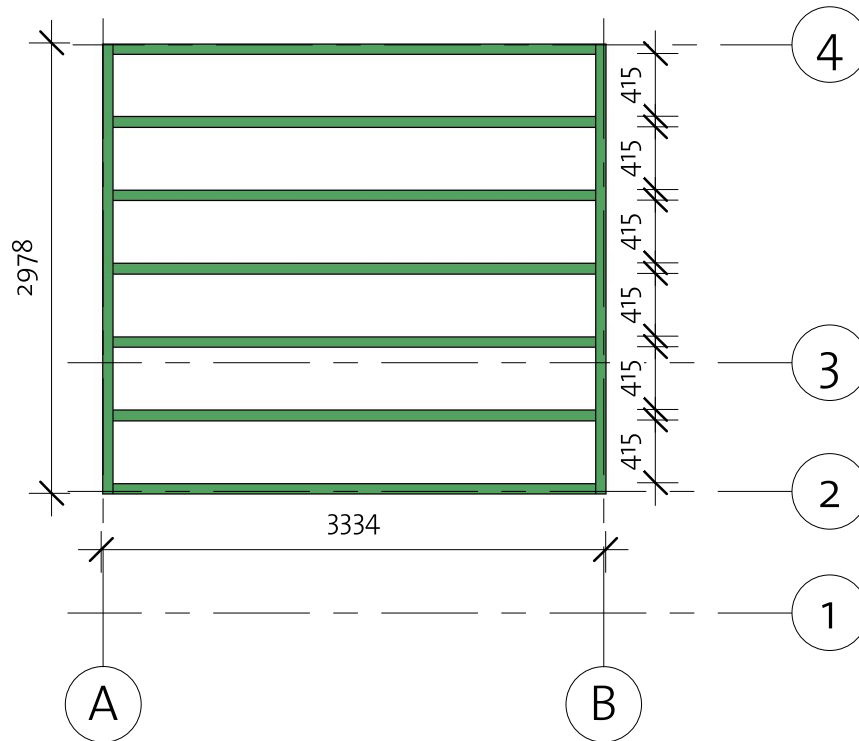

Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	2978
IFB2	IFB 70x40		7	3194

Colwood Bunkie 34 (335x299)

Wall 1

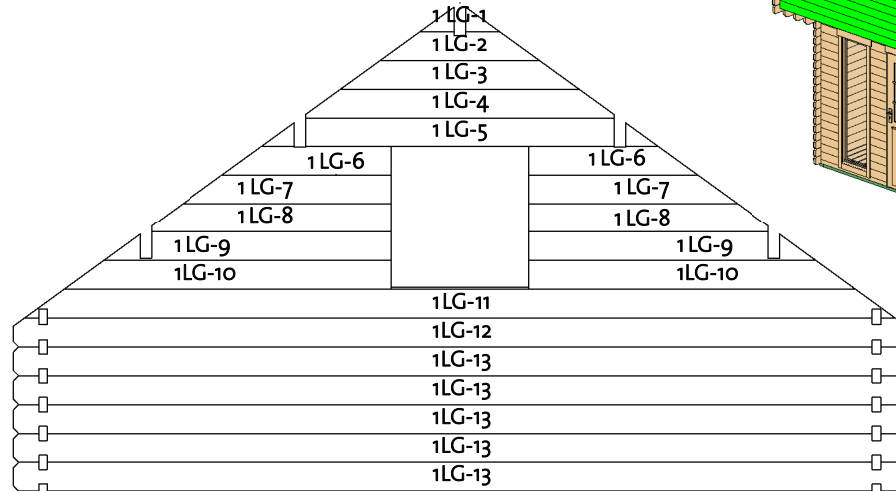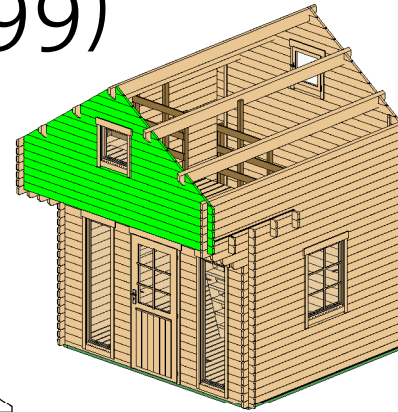

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1 *	34X114	1	315
1LG-2 *	34X114	1	630
1LG-3 *	34X114	1	944
1LG-4 *	34X114	1	1221
1LG-5 *	34X114	1	1572
1LG-6 *	34X114	2	671
1LG-7 *	34X114	2	828
1LG-8 *	34X114	2	953
1LG-9 *	34X114	2	1142
1LG-10*	34X114	2	1299
1LG-11 *	34X114	1	3458
1LG-12 *	34X114	1	3544
1LG-13	34X114	5	3544


* Gable - delivered premounted

Log Profile Wall 1	
Profile	Profile

34X114	
--------	--


Colwood Bunkie 34 (335x299)

Wall 2

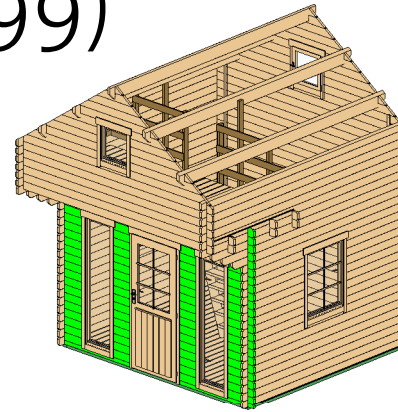

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	34x57	2	1347
2LG-1	34x114	34	344
2LG-2	34x114	34	484
2LG-3	34x114	4	3544
2LG-4	34x114	1	3544

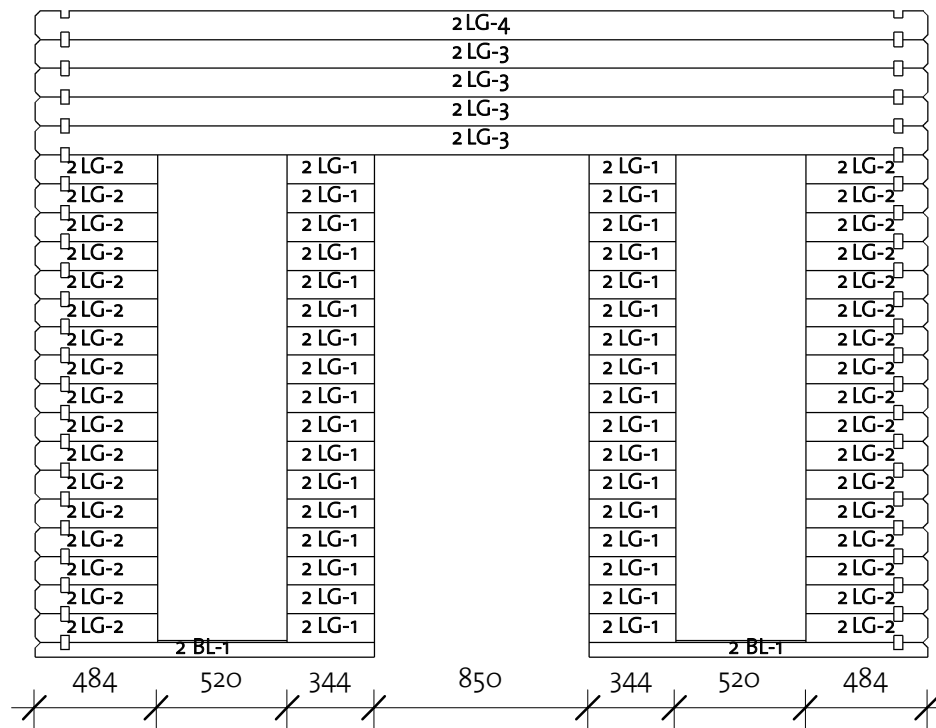


Log Profile Wall 2	
Profile	Profile

34x57	
34x114	


Colwood Bunkie 34 (335x299)

Wall 3

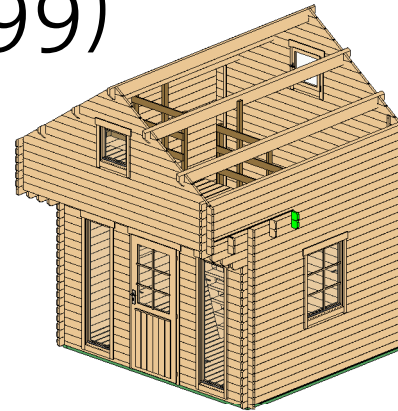



Wall 3			
Mark	Profile	Count	Cut Length

3LG-1	34x114	1	3544
3LG-2	34x114	1	3544





Log Profile Wall 3	
Profile	Profile

34x114	
34x114	

Colwood Bunkie 34 (335x299)

Wall 4

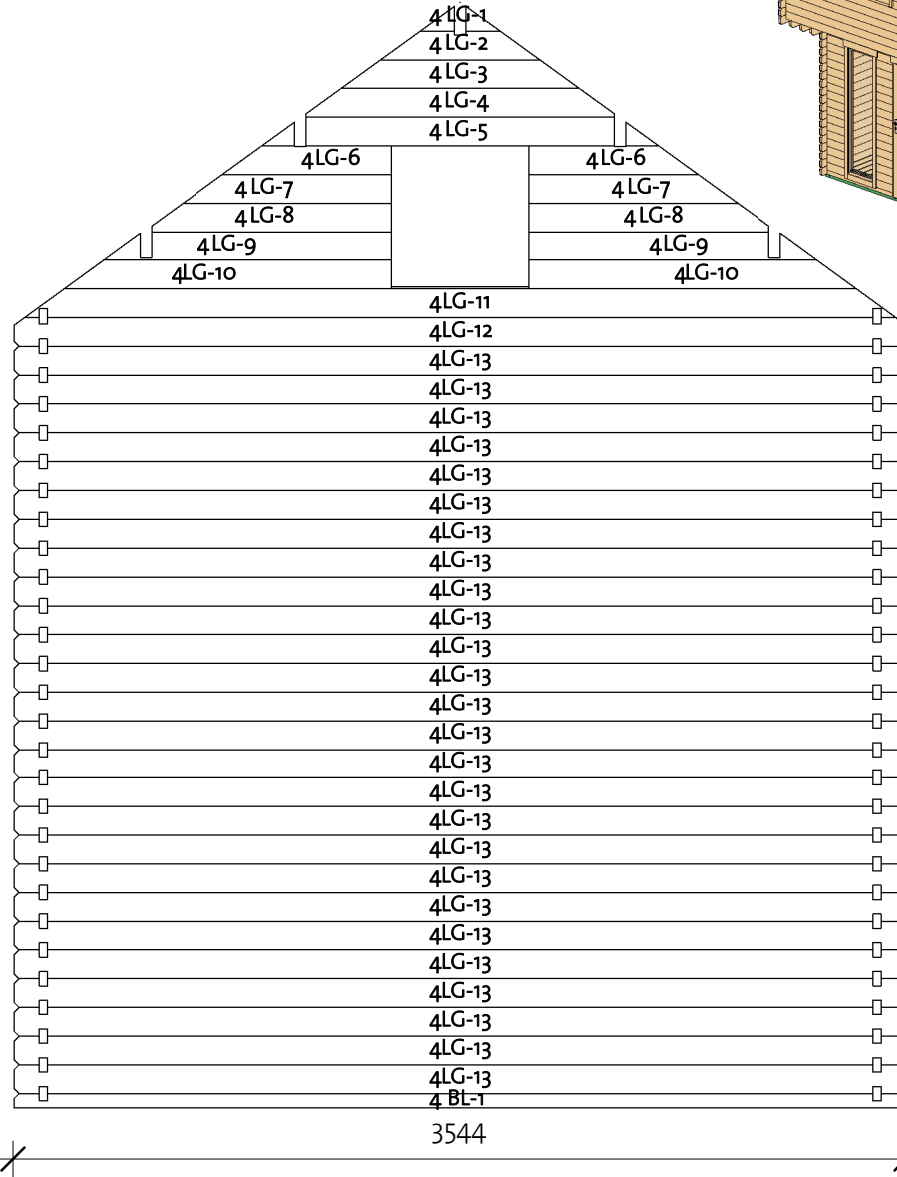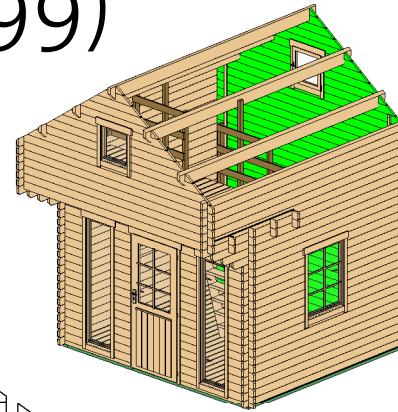



Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	34X57	1	3544
4LG-1 *	34X114	1	315
4LG-2 *	34X114	1	630
4LG-3 *	34X114	1	944
4LG-4 *	34X114	1	1221
4LG-5 *	34X114	1	1572
4LG-6 *	34X114	2	671
4LG-7 *	34X114	2	828
4LG-8 *	34X114	2	953
4LG-9 *	34X114	2	1142
4LG-10 *	34X114	2	1299
4LG-11 *	34X114	1	3458
4LG-12 *	34X114	1	3544
4LG-13	34X114	26	3544



* Gable - delivered premounted

Log Profile Wall 4	
Profile	Profile

34X57	
34X114	

Colwood Bunkie 34 (335x299)

Wall A

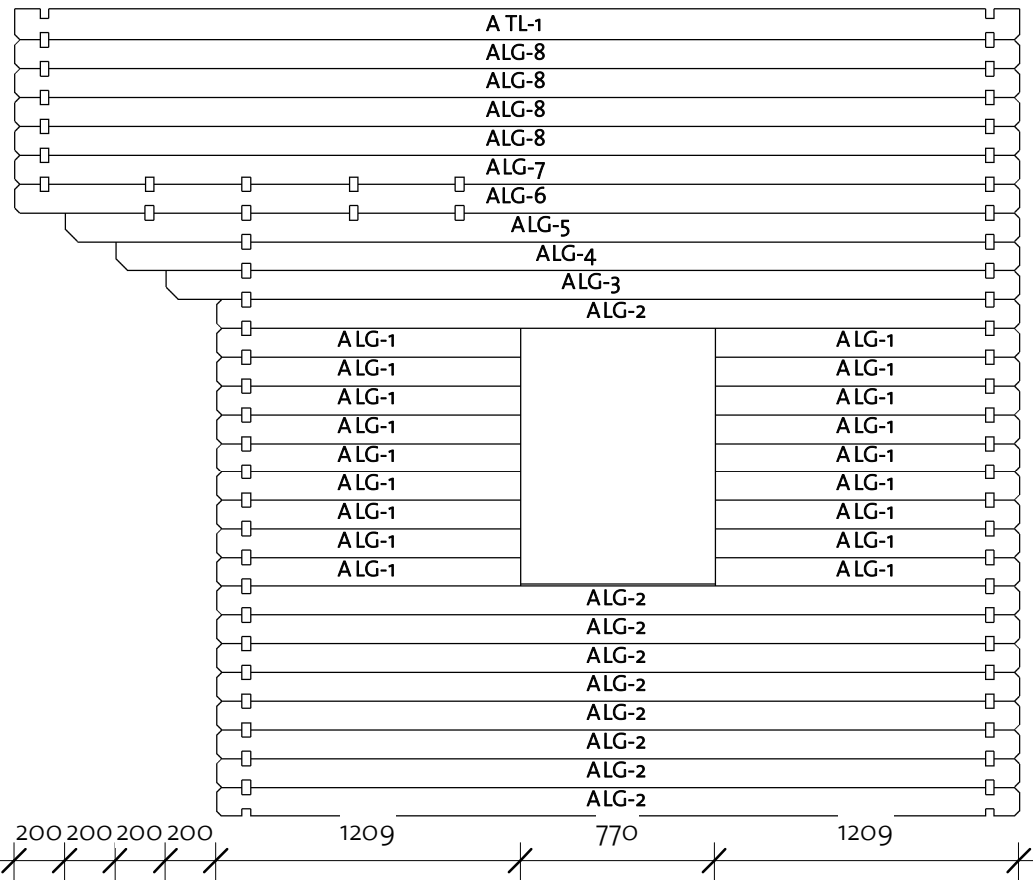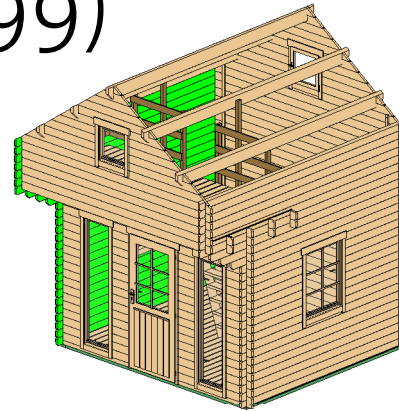

91910172_201130

Wall A


Mark	Profile	Count	Cut Length
------	---------	-------	------------

ALG-1	34X114	18	1209
ALG-2	34X114	9	3188
ALG-3	34X114	1	3388
ALG-4	34X114	1	3588
ALG-5	34X114	1	3788
ALG-6	34X114	1	3988
ALG-7	34X114	1	3988
ALG-8	34X114	4	3988
ATL-1	34X123	1	3988


Log Profile Wall A

Profile	Profile
---------	---------

34X114





34X123



Colwood Bunkie 34 (335x299)



Wall B

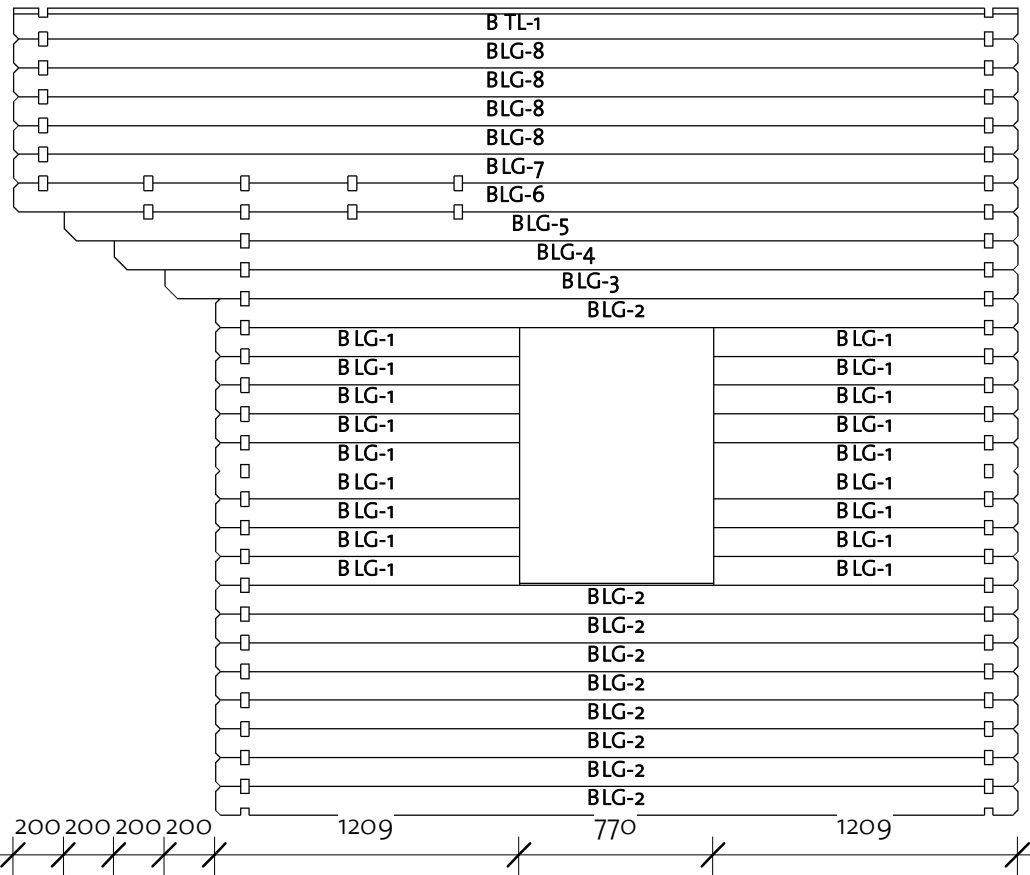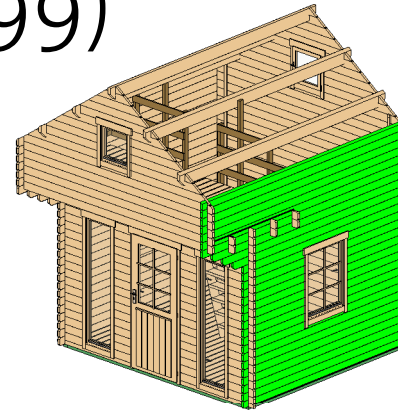

Wall B			
Mark	Profile	Count	Cut Length


BLG-1	34X114	18	1209
BLG-2	34X114	9	3188
BLG-3	34X114	1	3388
BLG-4	34X114	1	3588
BLG-5	34X114	1	3788
BLG-6	34X114	1	3988
BLG-7	34X114	1	3988
BLG-8	34X114	4	3988
BTL-1	34X123	1	3988




Log Profile Wall B	
Profile	Profile

34X114	
34X123	

Colwood Bunkie 34 (335x299)

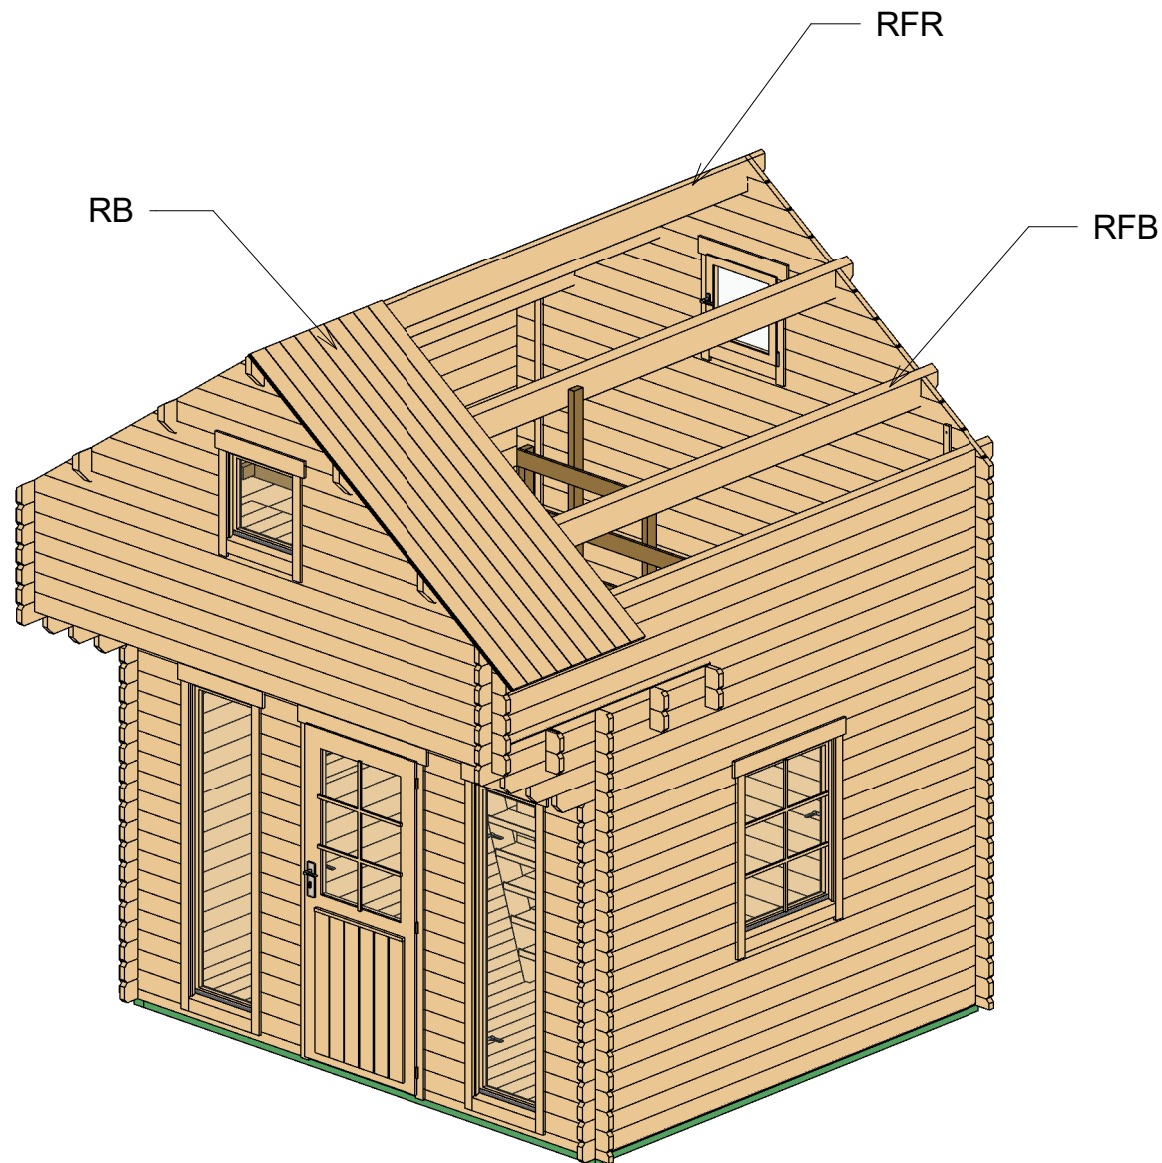
Roof 1




Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 45x195		1	3988
RFB	Beam 45x195		4	3988
RB	17x114		72	2368

Colwood Bunkie 34 (335x299)



Roof 2

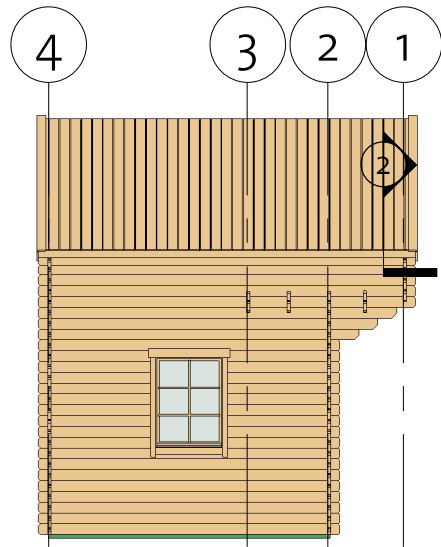

② Facia

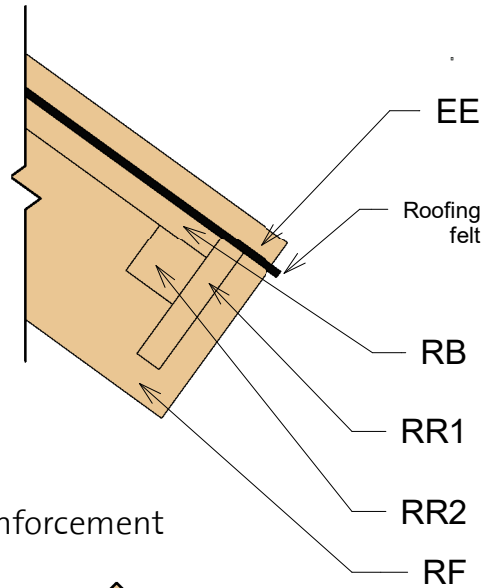

③ Roof Reinforcement

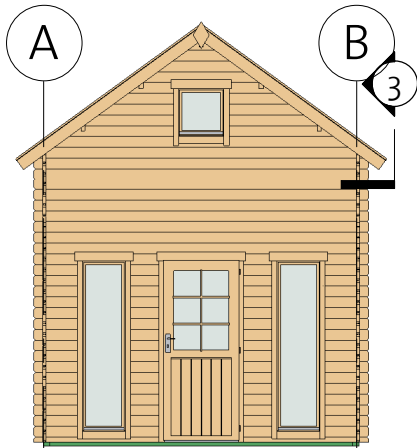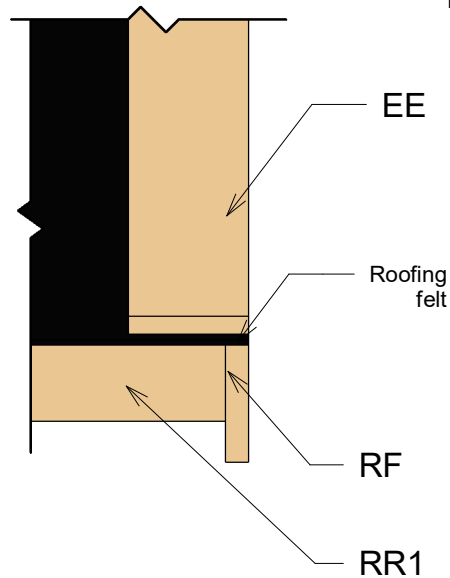




Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2407
RF	Roof Fascia 18x120		4	2407
RR1	Roof reinforce ment 18x95		2	3988
RR2	Roof reinforce ment 38x38		2	3988

Colwood Bunkie 34 (335x299)


Second floor (5,4 m2)

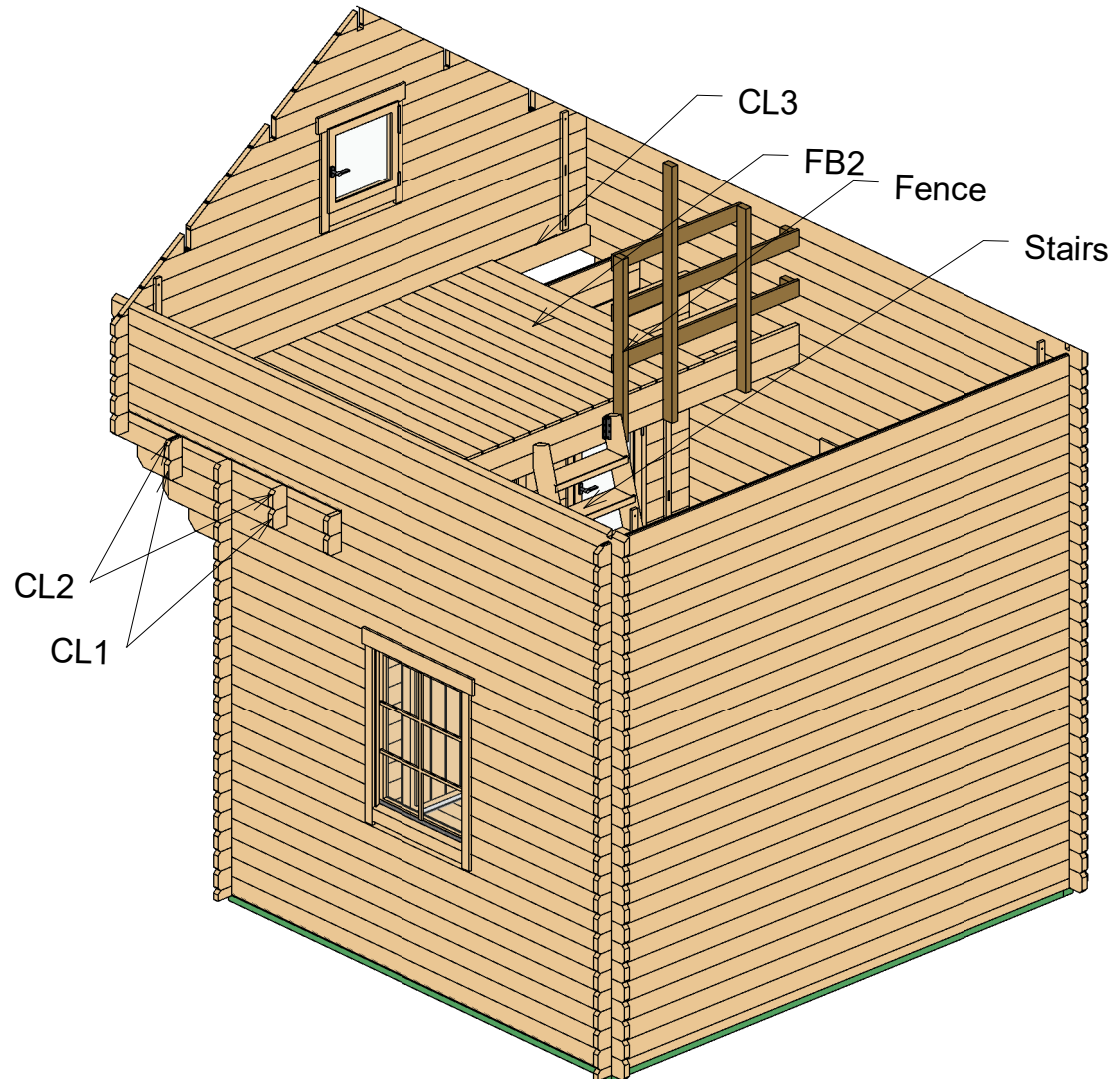

Second floor schedule				
Mark	Type	Profile	Length	Count
CL1	Log 34x114		3544	2
CL2	Log 34x114		3544	2
CL3	Log 34x114		3270	1

Colwood Bunkie 34 (335x299)


Fence

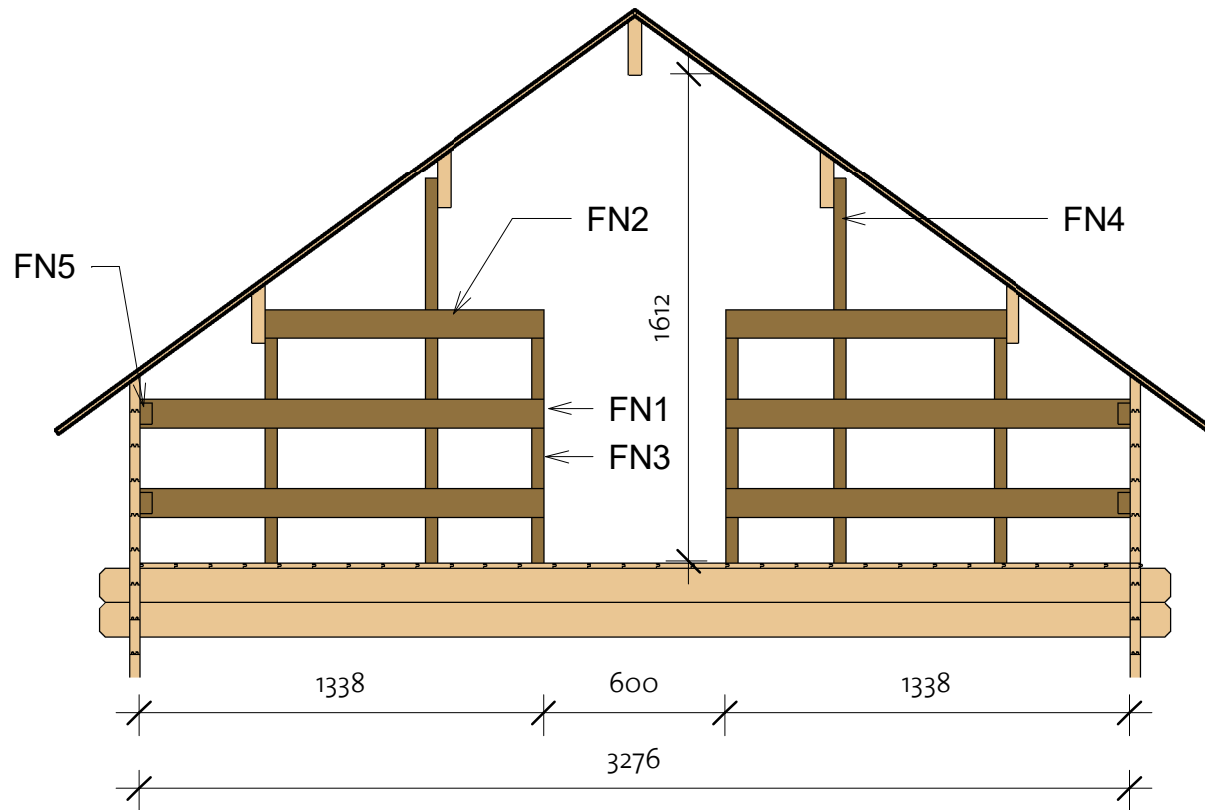

Fence schedule				
Mark	Type	Profile	Length	Count
FN1	Fence 18x95		1338	4
FN2	Fence 18x95		925	2
FN3	Fence 40x70		1079	4
FN4	Fence 40x70		1512	2
FN5	Fence 70x40		90	4

Colwood Bunkie 34 (335x299)

Extras

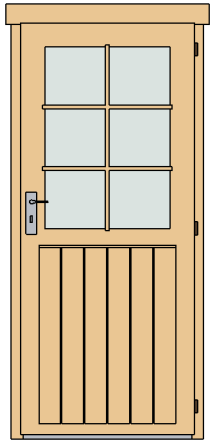


Door Schedule				
Model	Type	Width	Height	Count
B34D1R	Basic 34 door 1 right	840	1955	1
DCB6	Door Crossbar 6	--	--	1









Type	Count
------	-------

Windboard 18x40x700	2
Windboard 18x40x2500	2
Windboard 18x40x3200	2

Type	Count
------	-------




Romb	2
------	---



Hitblock	300-400 mm		
Ladder fittings			2
Bolts	M8 x 70		16
Nails	1,4 x 40		50
Screws	6,0 x 140		65
Screws	5,0 x 70		70
Screws	4,0 x 40		85
Screws	4,0 x 50		800

Window Schedule				
Mark	Type	Width	Height	Count
B34W2R	Basic 34 window 2 right	765	990	2
B34W3L	Basic 34 window 3, full glass left	515	1890	1
B34W3R	Basic 34 window 3, full glass right	515	1890	1
B34W4R	Basic 34 window 4, full glass right	540	540	2


WCB6	Windows Crossbar 6	--	--	2
------	--------------------	----	----	---






Colwood Bunkie 34 (335x299)

List of all items 1



Impregnated foundation beams

Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	2978
IFB2	IFB 70x40		7	3194



Roof


Mark	Type	Profile	Count	Length
RFR	Ridge 45x195		1	3988
RFB	Beam 45x195		4	3988
RB	17x114		72	2368

Second floor schedule





Mark	Type	Profile	Length	Count
CL1	Log 34x114		3544	2
CL2	Log 34x114		3544	2
CL3	Log 34x114		3270	1

Floor Schedule

Mark	Type	Profile	Count	Length
FB1	FB 17x114		30	2914
FB2	FB 17x114		30	1645




BB1	BB 20x40		3	3350
BB2	BB 20x40		3	3000

Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2407
RF	Roof Fascia 18x120		4	2407
RR1	Roof reinforce ment 18x95		2	3988
RR2	Roof reinforce ment 38x38		2	3988

Colwood Bunkie 34 (335x299)



List of all items 2

Stairs				
Mark	Profile	Profile	Count	Cut Length
ST1L	Stair 40x120		1	2600
ST1R	Stair 40x120		1	2600
ST2	Stair 143x40		11	520

Wall A			
Mark	Profile	Count	Cut Length
ALG-1	34x114	18	1209
ALG-2	34x114	9	3188
ALG-3	34x114	1	3388
ALG-4	34x114	1	3588
ALG-5	34x114	1	3788
ALG-6	34x114	1	3988
ALG-7	34x114	1	3988
ALG-8	34x114	4	3988
ATL-1	34x123	1	3988

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	34x114	18	1209
BLG-2	34x114	9	3188
BLG-3	34x114	1	3388
BLG-4	34x114	1	3588
BLG-5	34x114	1	3788
BLG-6	34x114	1	3988
BLG-7	34x114	1	3988
BLG-8	34x114	4	3988
BTL-1	34x123	1	3988

Fence schedule				
Mark	Type	Profile	Length	Count
FN1	Fence 18x95		1338	4
FN2	Fence 18x95		925	2
FN3	Fence 40x70		1079	4
FN4	Fence 40x70		1512	2
FN5	Fence 70x40		90	4

Colwood Bunkie 34 (335x299)

List of all items 3

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1 *	34X114	1	315
1LG-2 *	34X114	1	630
1LG-3 *	34X114	1	944
1LG-4 *	34X114	1	1221
1LG-5 *	34X114	1	1572
1LG-6 *	34X114	2	671
1LG-7 *	34X114	2	828
1LG-8 *	34X114	2	953
1LG-9 *	34X114	2	1142
1LG-10*	34X114	2	1299
1LG-11 *	34X114	1	3458
1LG-12*	34X114	1	3544
1LG-13	34X114	5	3544

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	34X57	1	3544
4LG-1 *	34X114	1	315
4LG-2 *	34X114	1	630
4LG-3 *	34X114	1	944
4LG-4 *	34X114	1	1221
4LG-5 *	34X114	1	1572
4LG-6 *	34X114	2	671
4LG-7 *	34X114	2	828
4LG-8 *	34X114	2	953
4LG-9 *	34X114	2	1142
4LG-10*	34X114	2	1299
4LG-11 *	34X114	1	3458
4LG-12*	34X114	1	3544
4LG-13	34X114	26	3544

Wall 2			
Mark	Profile	Count	Cut Length




2BL-1	34X57	2	1347
2LG-1	34X114	34	344
2LG-2	34X114	34	484
2LG-3	34X114	4	3544
2LG-4	34X114	1	3544

Wall 3			
Mark	Profile	Count	Cut Length


3LG-1	34X114	1	3544
3LG-2	34X114	1	3544

* Gable - delivered premounted

Log profiles	
Profile	Profile

34X57	
34X114	
34X114	

Log profiles	
Profile	Profile

34X123	
34X123	