



Louisville 40 (510x570)



92402221_241024

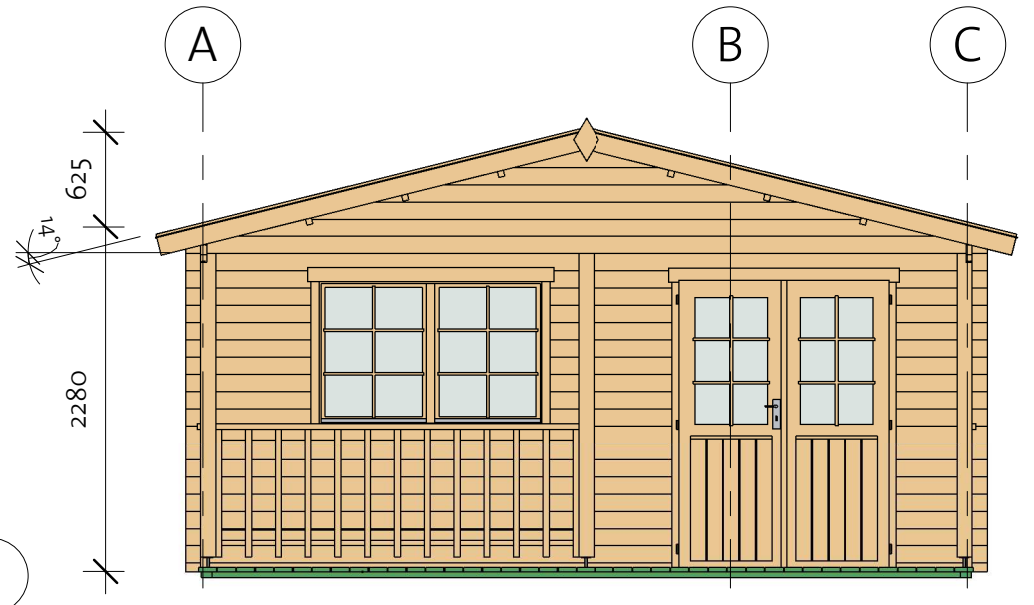

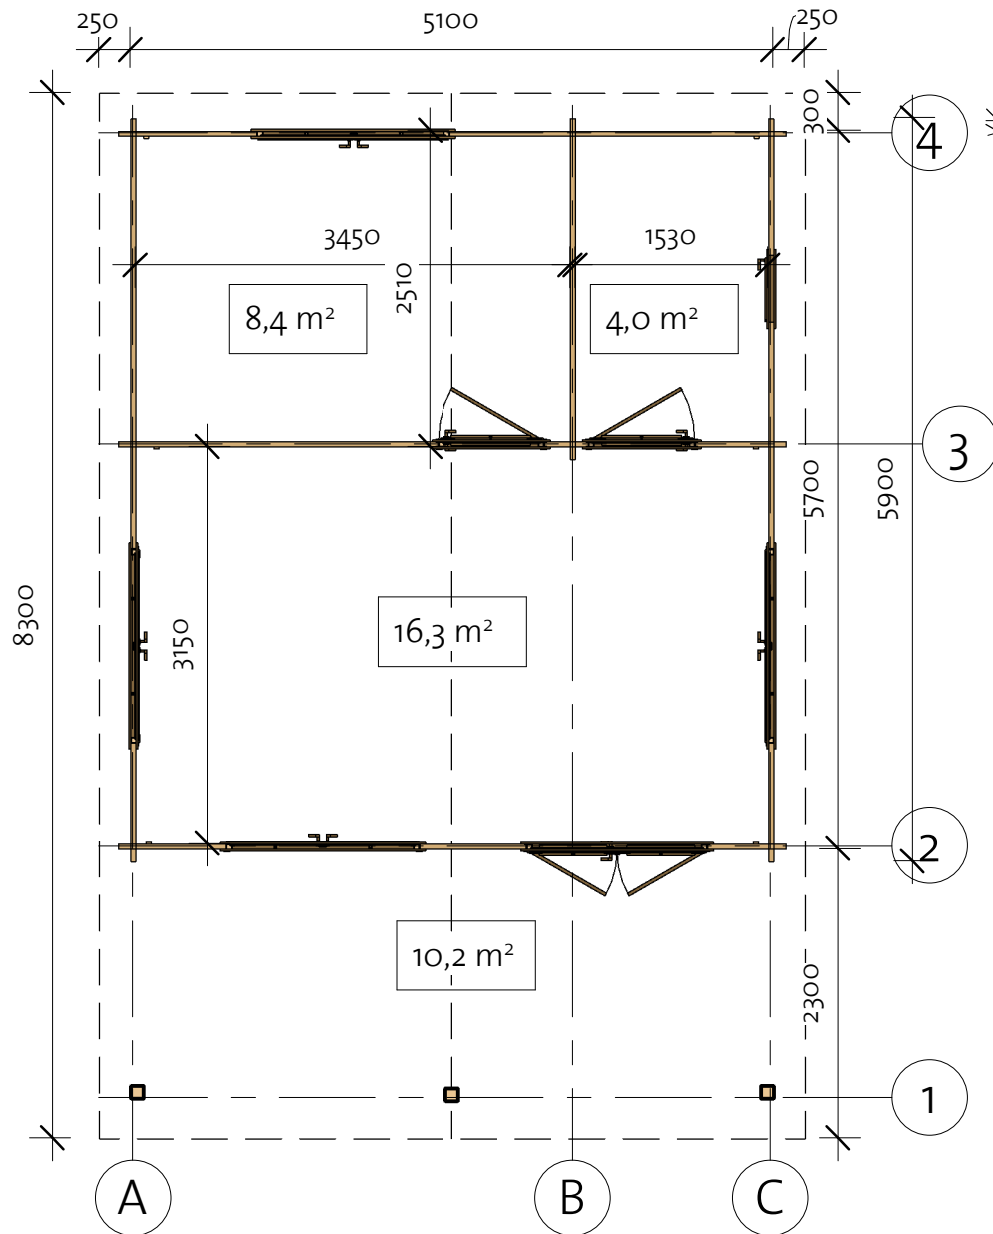

Louisville 40 (510x570)

Floor Plan

Floor Schedule


Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

FB2	FB 17x114		45	2426
FB1	FB 17x114		45	3144



BB 1	BB 18x40		2	5700
BB 2	BB 18x40		5	5100

Terrace Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------


TB	TB 28x120		41	1995
----	-----------	---	----	------

① Baseboard

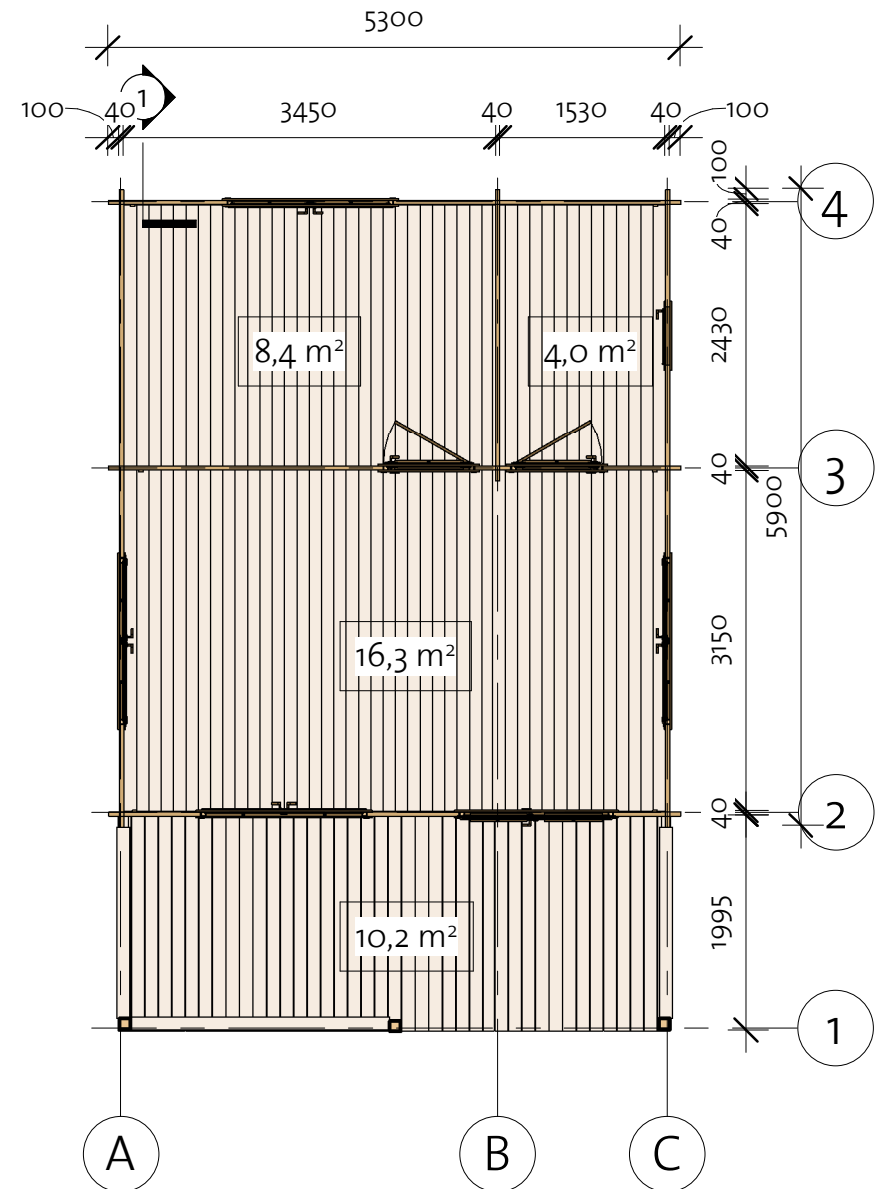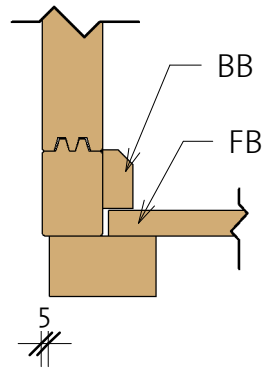

Louisville 40 (510x570)


Wall 1

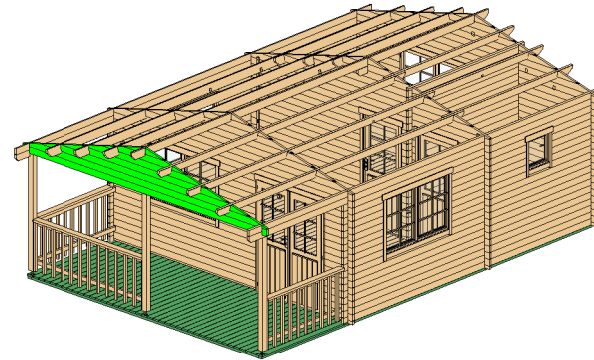

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1 *	40x114	1	898
1LG-2 *	40x114	1	1814
1LG-3 *	40x114	1	2730
1LG-4 *	40x114	1	3646
1LG-5 *	40x114	1	4562
1LG-6 *	40x114	1	5300
1LG-7	40x114	1	5300


* Gable - delivered premounted

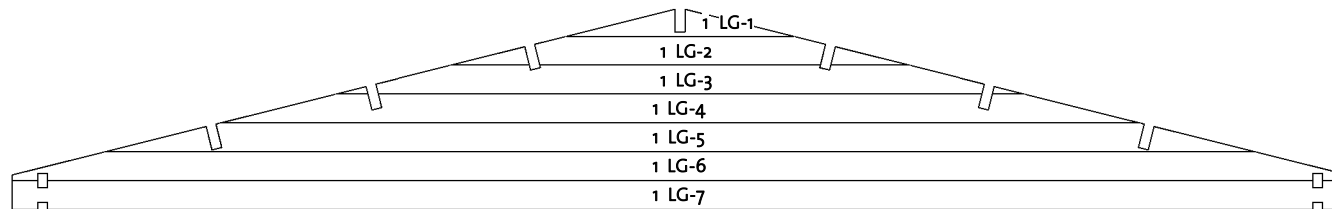

Log Profile Wall 1


Profile	Profile
---------	---------

40x114




Louisville 40 (510x570)

Wall 2

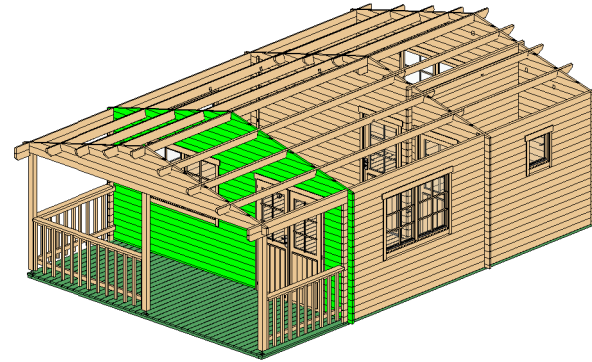

* Gable - delivered premounted

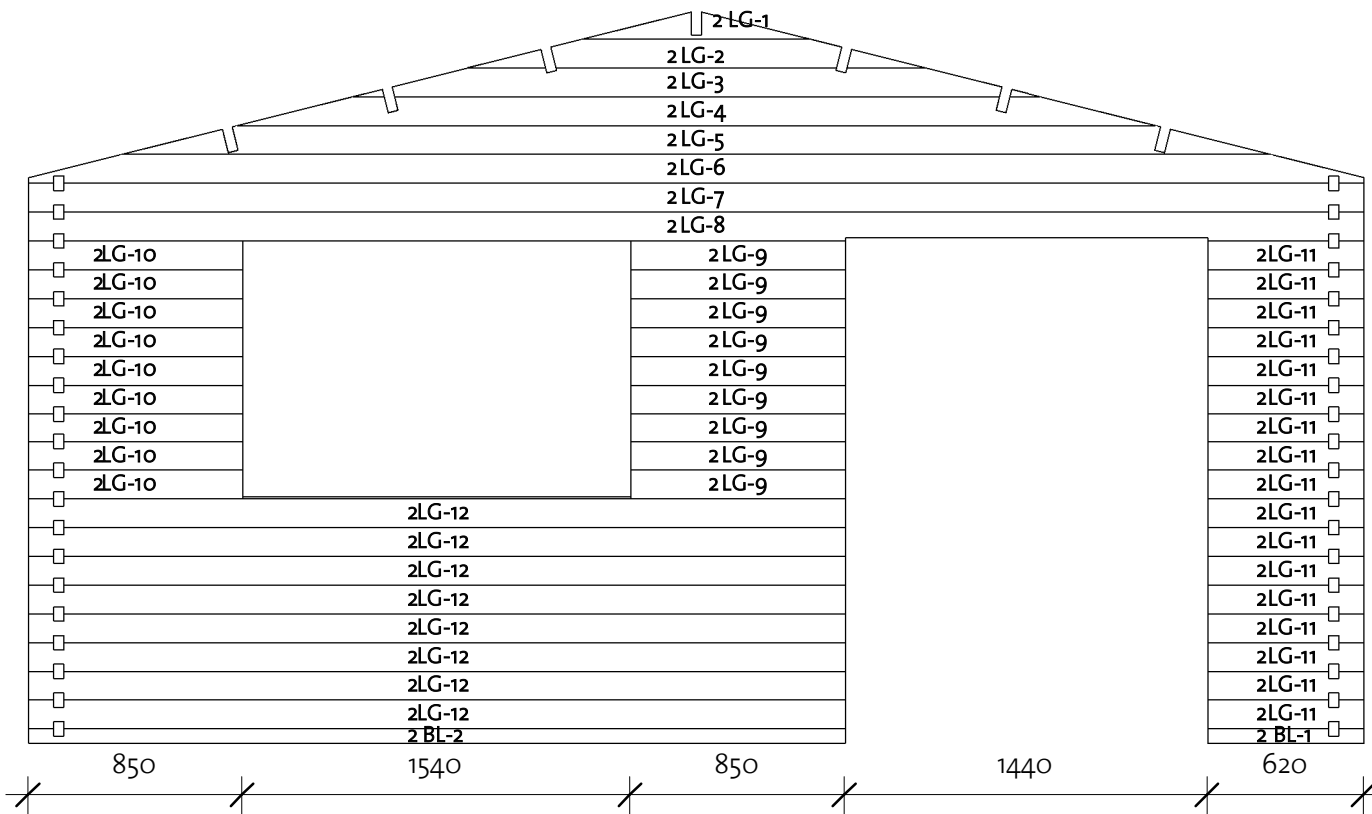

Wall 2			
Mark	Profile	Count	Cut Length



2BL-1	40x57	1	620
2BL-2	40x57	1	3240
2LG-1 *	40x114	1	898
2LG-2 *	40x114	1	1814
2LG-3 *	40x114	1	2730
2LG-4 *	40x114	1	3646
2LG-5 *	40x114	1	4562
2LG-6 *	40x114	1	5300
2LG-7	40x114	1	5300
2LG-8	40x114	1	5300
2LG-9	40x114	9	850
2LG-10	40x114	9	850
2LG-11	40x114	17	620
2LG-12	40x114	8	3240

Log Profile Wall 2	
Profile	Profile

40x57	
40x114	

Louisville 40 (510x570)

Wall 3

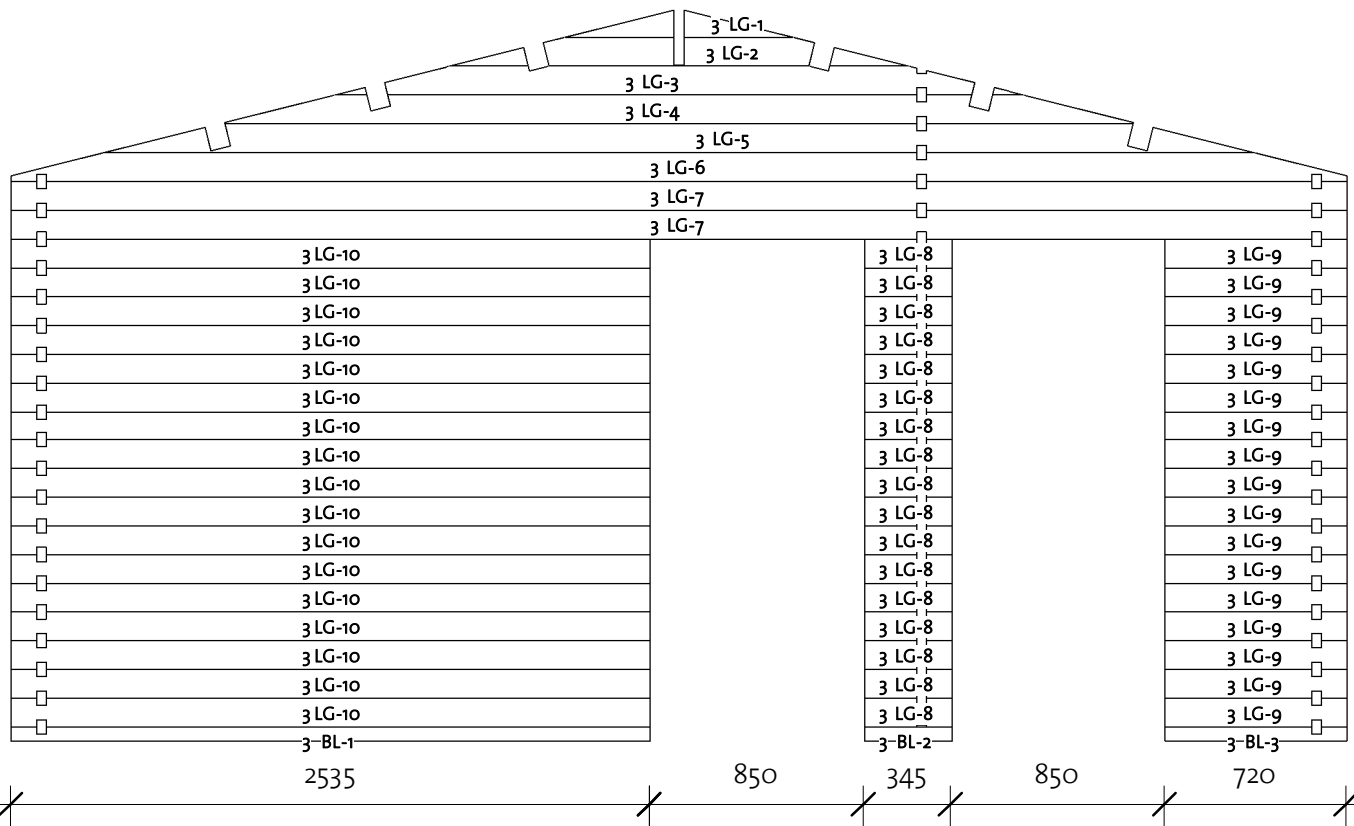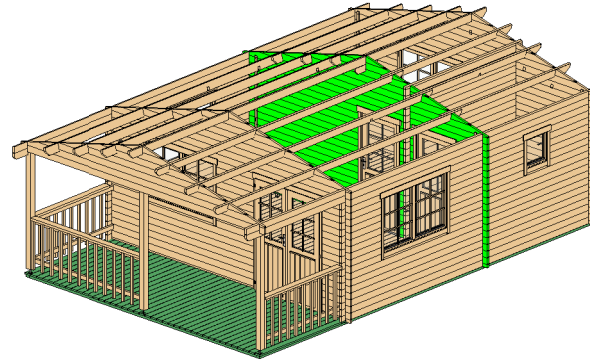



92402221_241024

Wall 3

Mark	Profile	Count	Cut Length
3BL-1	40X57	1	2535
3BL-2	40X57	1	345
3BL-3	40X57	1	720
3LG-1*	40X114	1	898
3LG-2*	40X114	1	1814
3LG-3*	40X114	1	2730
3LG-4*	40X114	1	3608
3LG-5*	40X114	1	4562
3LG-6*	40X114	1	5300
3LG-7	40X114	2	5300
3LG-8	40X114	17	345
3LG-9	40X114	17	720
3LG-10	40X114	17	2535


* Gable - delivered premounted

Log Profile Wall 3

Profile	Profile
40X57	
40X114	

Louisville 40 (510x570)


Wall 4

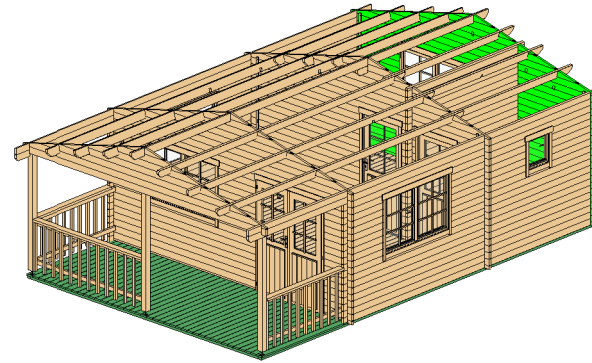

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40x57	1	5300
4LG-1*	40x114	1	898
4LG-2*	40x114	1	1814
4LG-3*	40x114	1	2730
4LG-4*	40x114	1	3608
4LG-5*	40x114	1	4562
4LG-6*	40x114	1	5300
4LG-7	40x114	10	5300
4LG-8	40x114	9	1095
4LG-9	40x114	9	2665

* Gable - delivered premounted

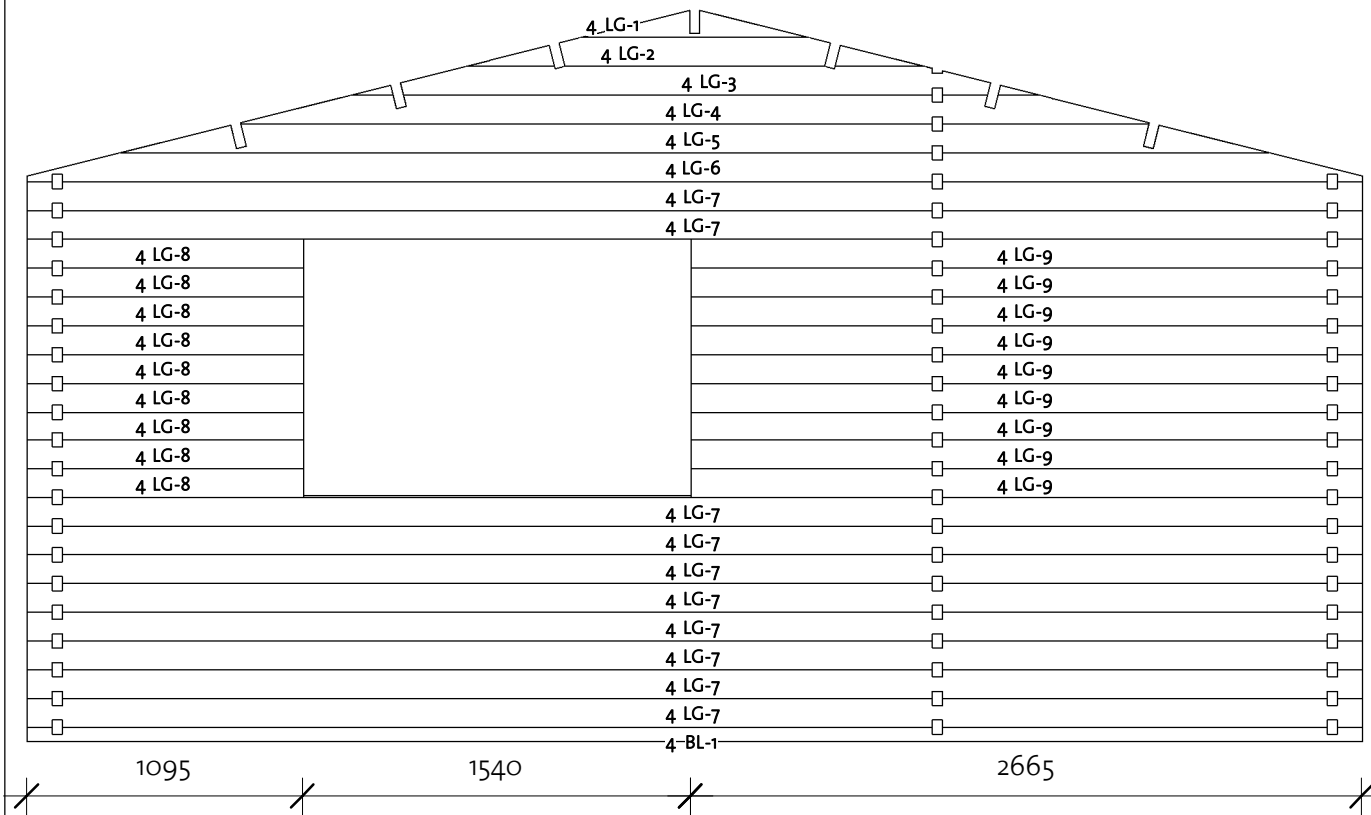


Log Profile Wall 4	
Profile	Profile

40x57	
40x114	

92402221_241024

Louisville 40 (510x570)



Wall A

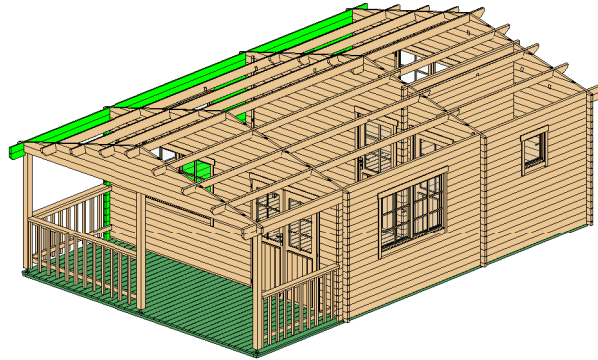



Wall A			
Mark	Profile	Count	Cut Length

Log Profile Wall A	
Profile	Profile

Log Profile Wall A	
Profile	Profile




ALG-1	40X114	1	2790
ALG-2	40X114	1	5510
ALG-3	40X114	9	945
ALG-4	40X114	9	3415
ALG-5	40X114	8	5900
ALG-6	40X114	1	5900
ATL-1	40X114	1	2790
ATL-2	40X114	1	5510

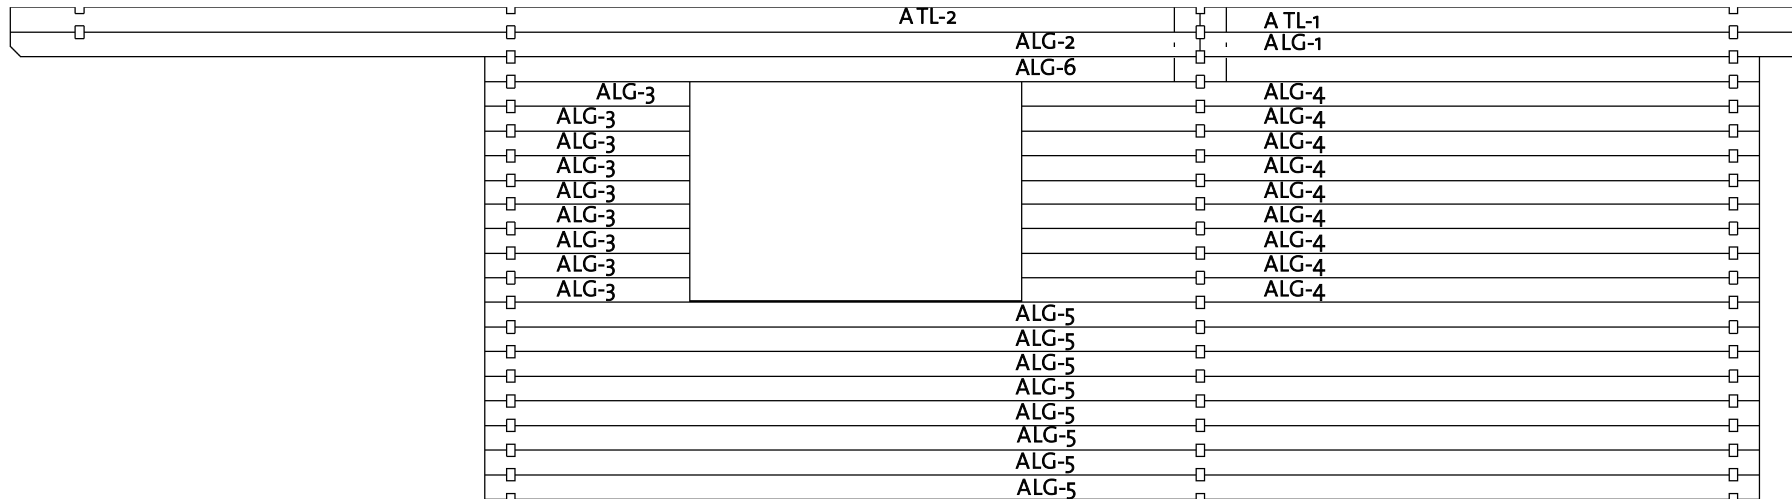


Louisville 40 (510x570)

Wall C

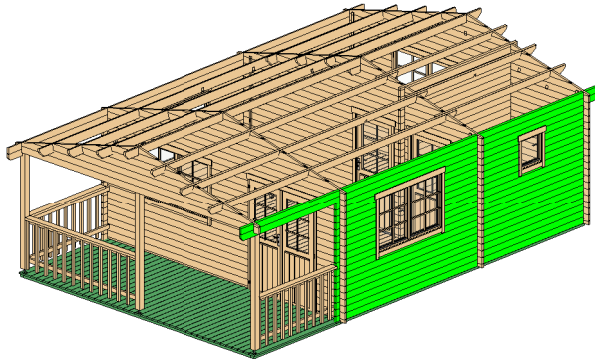


Log Profile Wall C	
Profile	Profile

Log Profile Wall C	
Profile	Profile




Wall C			
Mark	Profile	Count	Cut Length

CLG-1	40X114	1	2790
CLG-2	40X114	1	5510
CLG-3	40X114	5	1083
CLG-4	40X114	9	945
CLG-5	40X114	8	5900
CLG-6	40X114	1	5900
CLG-7	40X114	5	1788
CLG-8	40X114	4	3415
CTL-1	40X114	1	2790
CTL-2	40X114	1	5510

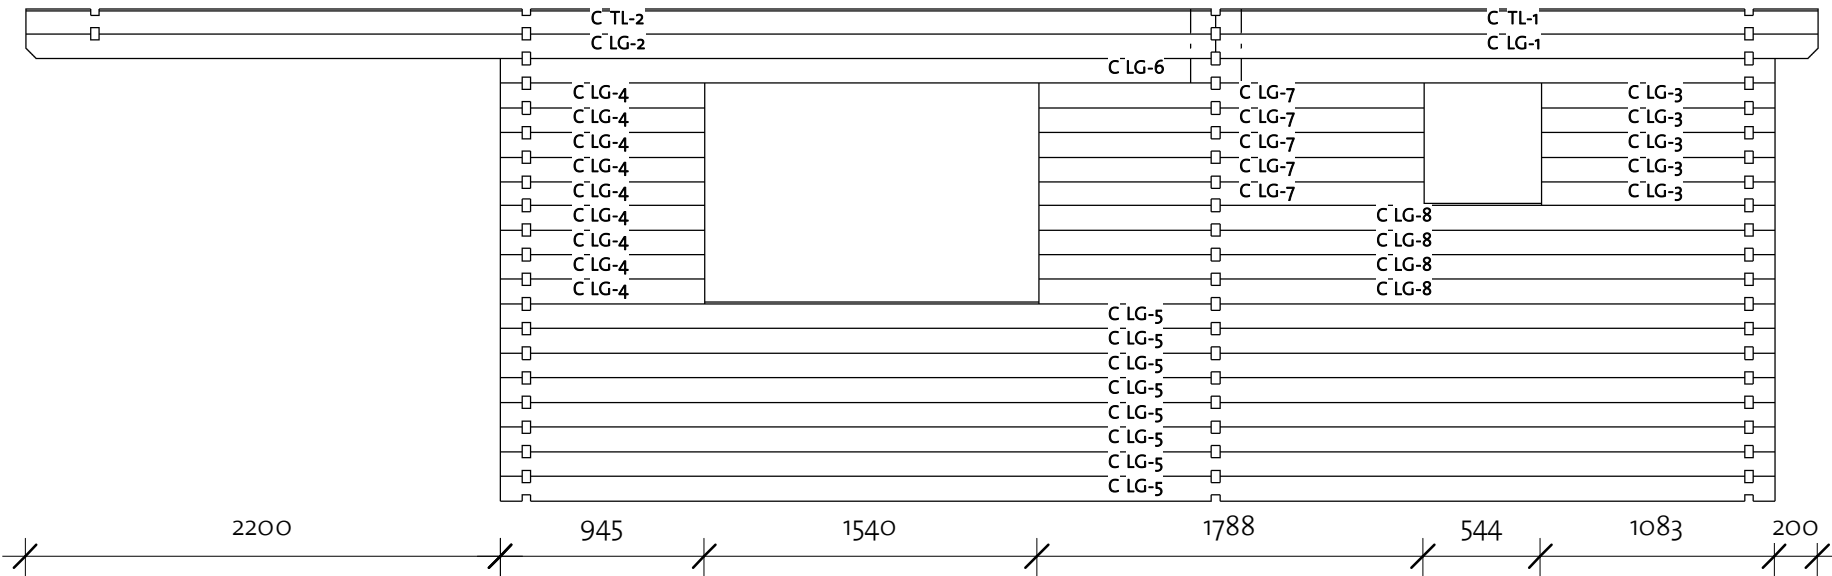

Louisville 40 (510x570)




Roof 1

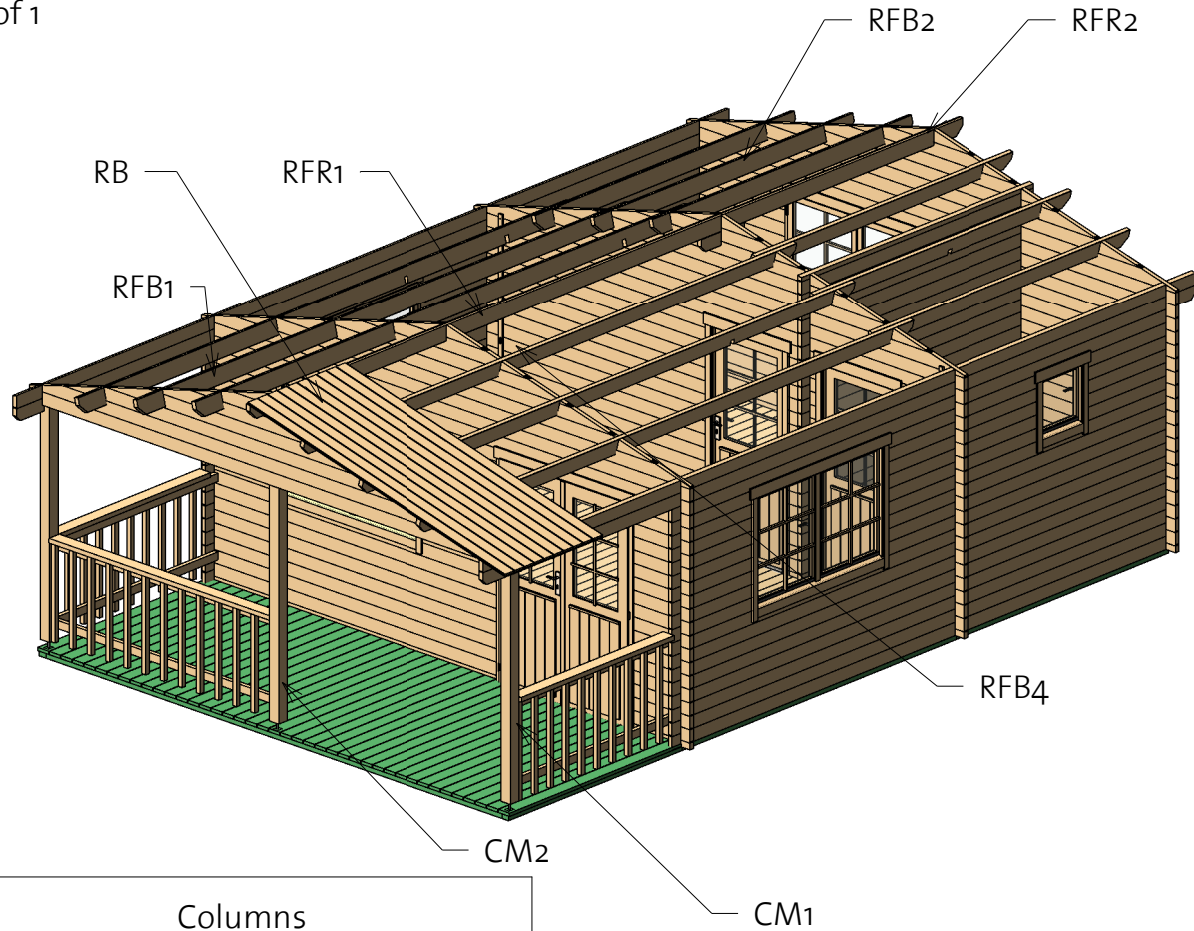

Columns			
Mark	Profile	Count	Length


CM1	Post 100X100	2	2013
CM2	Post 100X100	1	2070

Roof				
Mark	Type	Profile	Count	Cut Length



RB	17x114		148	2881
RFB1	Beam 40X143		6	5730
RFB2	Beam 40X143		6	3010
RFB3	Beam 40X120		1	500
RFR1	Ridge 40X143		1	5510
RFR2	Ridge 40X143		1	2790

Louisville 40 (510x570)


Roof 2

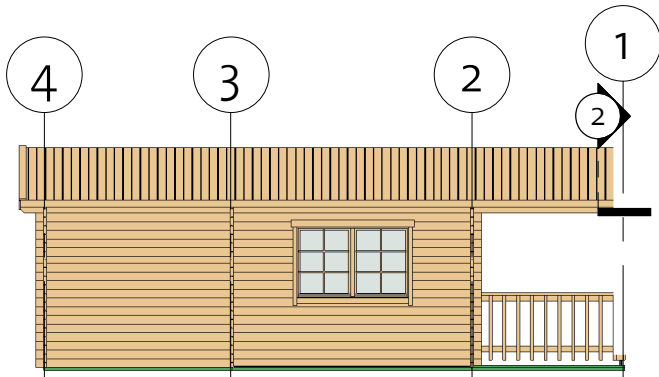

② Fascia

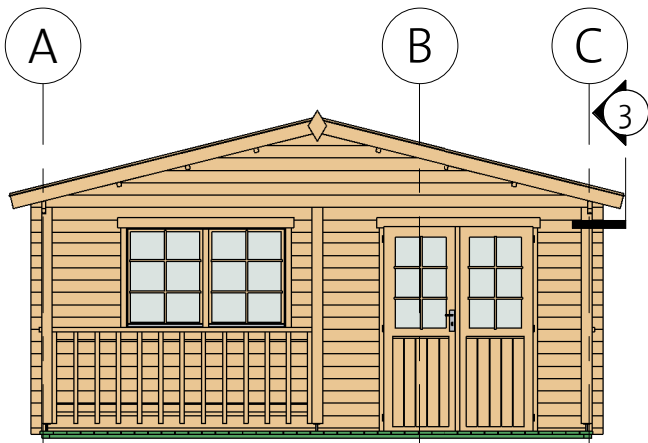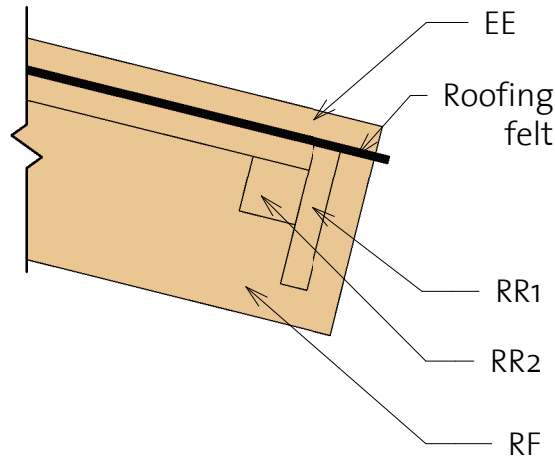

③ Roof Reinforcement

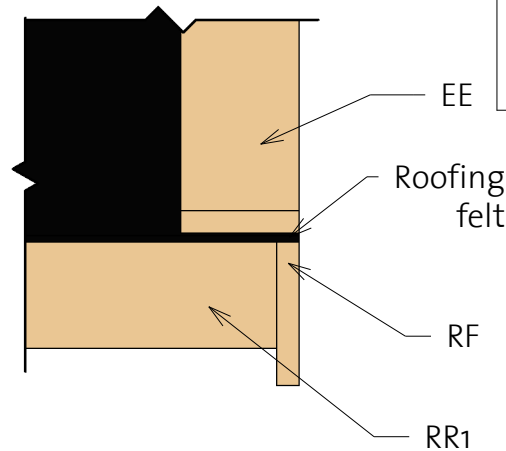

Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2926
RF	Roof Fascia 18x120		4	2926
RR1	Roof reinforcement 18x95		4	4150
RR2	Roof reinforcement 38x38		4	4150

Louisville 40 (510x570)

Extras





Door Schedule				
Model	Type	Width	Height	Count
CDD1R	Classic double door 1 right	1425	1955	1
CD4R	Classic door 4 right	840	1955	1
CD4L	Classic door 4 left	840	1955	1
DCB6	Door Crossbar 6	--	--	4
DB	Door beam 1440 mm	40	12	1

Fasteners/Extras		
Name	Type	Count

Hitblock	300-400 mm	
Adjustable post foot		3
Dowel	16,0 x 150	12
Bolts	M8x70	18
Screws	5,0 x 70	60
Nails	1,4 x 40	60
Screws	6,0 x 140	100
Screws	4,0 x 40	1930


Window Schedule				
Model	Type	Width	Height	Count
CDW1	Classic double window 1	1530	990	4
CW12R	Classic window 12, full glass righth	540	540	1
WCB6	Windows Crossbar 6	--	--	8

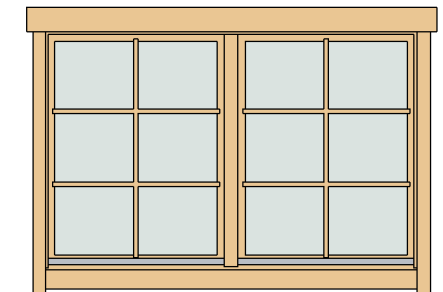


Louisville 40 (510x570)


List of all items 1

Impregnated foundation beams


Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		16	4950
IFB2	IFB 70x40		2	2015
IFB3	IFB 70x40		2	2485
IFB4	IFB 70x40		2	3190

Floor Schedule




Mark	Type	Profile	Count	Length
FB2	FB 17x114		45	2426
FB1	FB 17x114		45	3144

BB 1	BB 18x40		2	5700
BB 2	BB 18x40		5	5100

Terrace Schedule

Mark	Type	Profile	Count	Length
TB	TB 28x120		41	1995

Roof

Mark	Type	Profile	Count	Cut Length
RB	17x114		148	2881
RFB1	Beam 40x143		6	5730
RFB2	Beam 40x143		6	3010
RFB3	Beam 40x120		1	500
RFR1	Ridge 40x143		1	5510
RFR2	Ridge 40x143		1	2790

Type	Count	Length
------	-------	--------

Windboard 18x40	6	2200
--------------------	---	------





Type	Count
------	-------

Romb	2
------	---





Louisville 40 (510x570)

List of all items 2

Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2926
RF	Roof Fascia 18x120		4	2926
RR1	Roof reinforcement 18x95		4	4150
RR2	Roof reinforcement 38x38		4	4150

Columns			
Mark	Profile	Count	Length
CM1	Post 100x100	2	2013
CM2	Post 100x100	1	2070

Fence schedule				
Mark	Type	Profile	Count	Length
FN1	Fence 40x40		33	850
FN2	Fence 40x70		2	2400
FN3	Fence 40x70		4	1880
FN4	Fence 40x120		1	2400
FN5	Fence 40x120		2	1780

Louisville 40 (510x570)

List of all items 3

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1 *	40X114	1	898
1LG-2 *	40X114	1	1814
1LG-3 *	40X114	1	2730
1LG-4 *	40X114	1	3646
1LG-5 *	40X114	1	4562
1LG-6 *	40X114	1	5300
1LG-7	40X114	1	5300

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	1	620
2BL-2	40X57	1	3240
2LG-1 *	40X114	1	898
2LG-2 *	40X114	1	1814
2LG-3 *	40X114	1	2730
2LG-4 *	40X114	1	3646
2LG-5 *	40X114	1	4562
2LG-6 *	40X114	1	5300
2LG-7	40X114	1	5300
2LG-8	40X114	1	5300
2LG-9	40X114	9	850
2LG-10	40X114	9	850
2LG-11	40X114	17	620
2LG-12	40X114	8	3240

Wall 3			
Mark	Profile	Count	Cut Length

3BL-1	40X57	1	2535
3BL-2	40X57	1	345
3BL-3	40X57	1	720
3LG-1 *	40X114	1	898
3LG-2 *	40X114	1	1814
3LG-3 *	40X114	1	2730
3LG-4 *	40X114	1	3608
3LG-5 *	40X114	1	4562
3LG-6 *	40X114	1	5300
3LG-7	40X114	2	5300
3LG-8	40X114	17	345
3LG-9	40X114	17	720
3LG-10	40X114	17	2535

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40X57	1	5300
4LG-1 *	40X114	1	898
4LG-2 *	40X114	1	1814
4LG-3 *	40X114	1	2730
4LG-4 *	40X114	1	3608
4LG-5 *	40X114	1	4562
4LG-6 *	40X114	1	5300
4LG-7	40X114	10	5300
4LG-8	40X114	9	1095
4LG-9	40X114	9	2665

* Gable - delivered premounted

Louisville 40 (510x570)

List of all items 4

Wall A

Mark	Profile	Count	Cut Length
------	---------	-------	------------

ALG-1	40X114	1	2790
ALG-2	40X114	1	5510
ALG-3	40X114	9	945
ALG-4	40X114	9	3415
ALG-5	40X114	8	5900
ALG-6	40X114	1	5900
ATL-1	40X114	1	2790
ATL-2	40X114	1	5510

Wall B

Mark	Profile	Count	Cut Length
------	---------	-------	------------






BLG-1	40X114	23	2710
BTL-1	40X49	1	2710

Wall C

Mark	Profile	Count	Cut Length
------	---------	-------	------------

CLG-1	40X114	1	2790
CLG-2	40X114	1	5510
CLG-3	40X114	5	1083
CLG-4	40X114	9	945
CLG-5	40X114	8	5900
CLG-6	40X114	1	5900
CLG-7	40X114	5	1788
CLG-8	40X114	4	3415
CTL-1	40X114	1	2790
CTL-2	40X114	1	5510

Log profiles


Profile	Profile
40X49	
40X57	
40X114	
40X114	
40X114	

Windboard

① Windboard Assembly 1



② Windboard Assembly 2

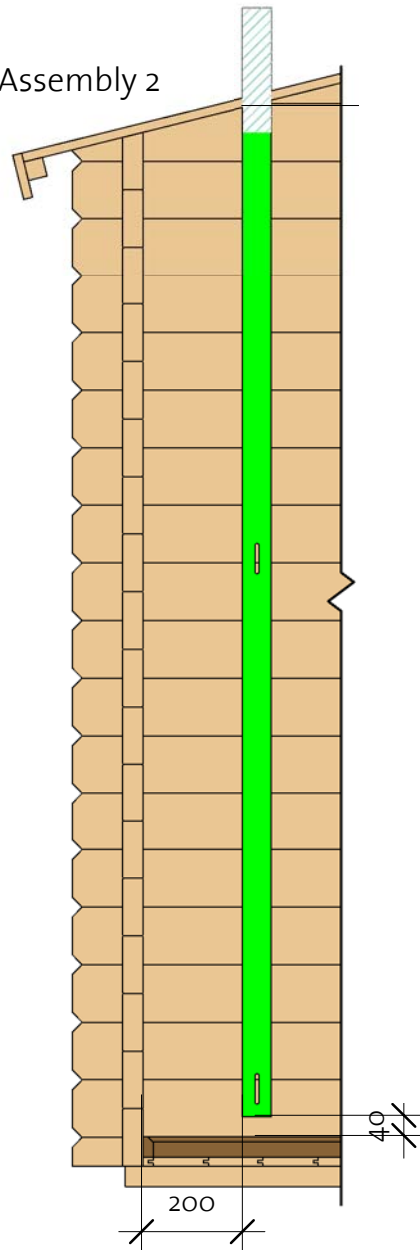

③ Windboard Assembly 3

