

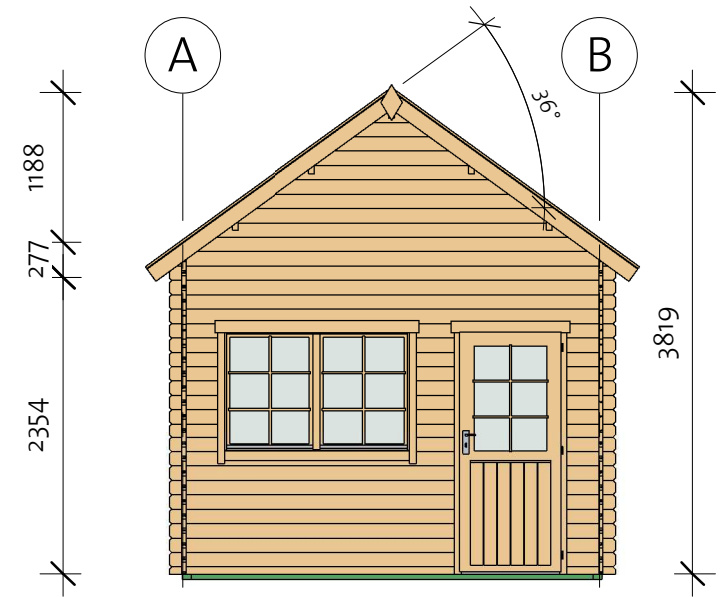



Northern Bunkie 34 (335x299)

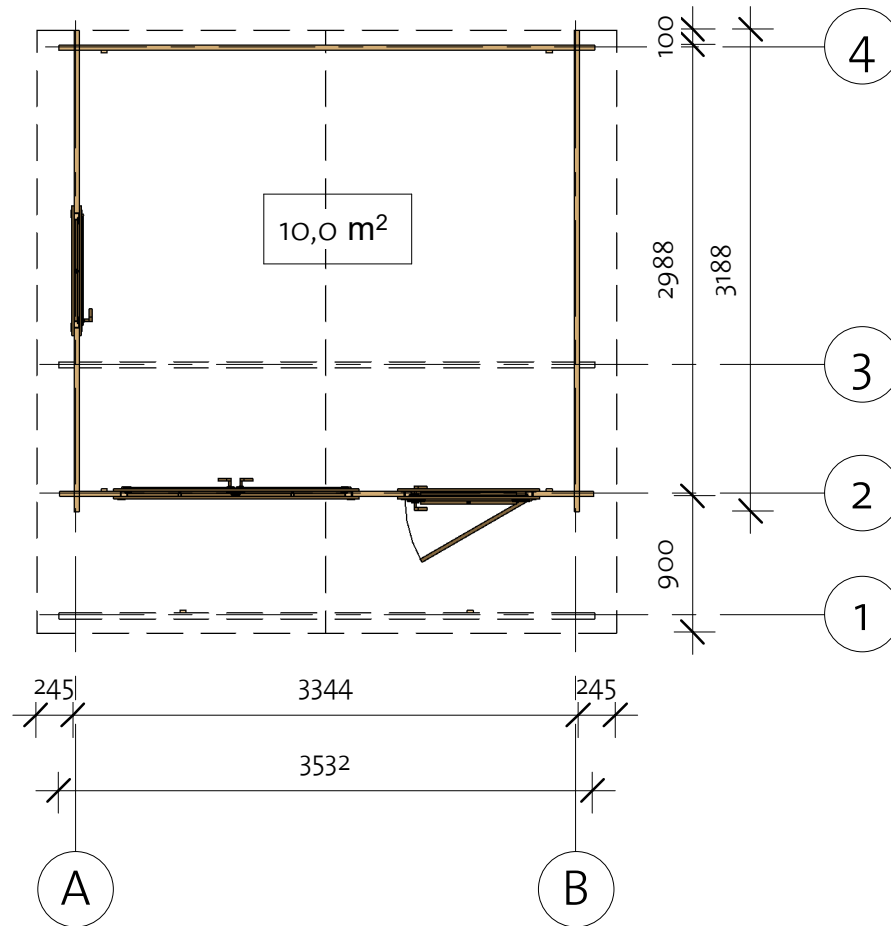

Northern Bunkie 34 (335x299)



Foundation

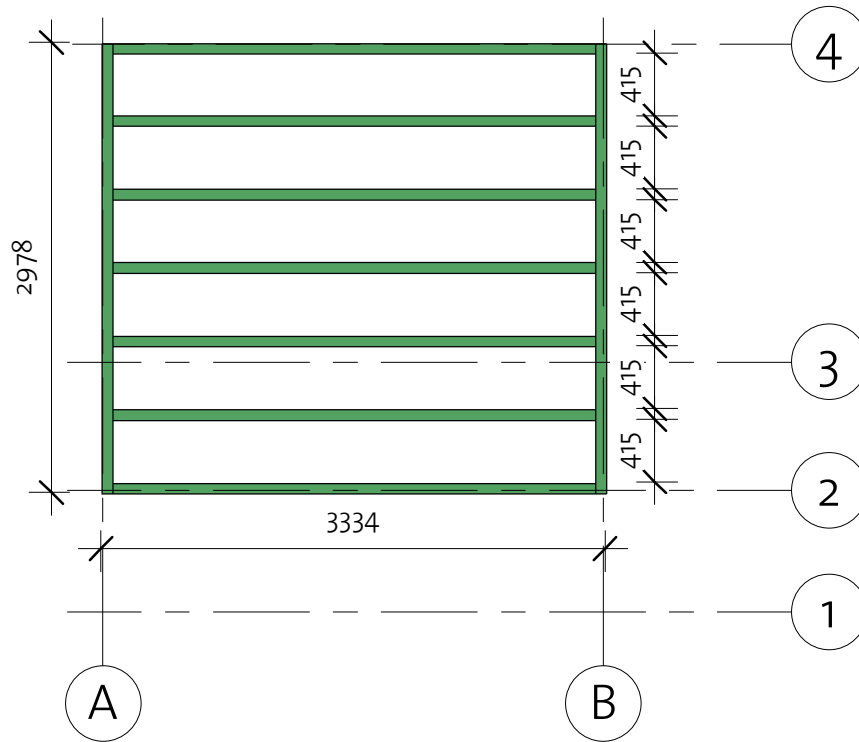




Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	2978
IFB2	IFB 70x40		7	3194

Northern Bunkie 34 (335x299)

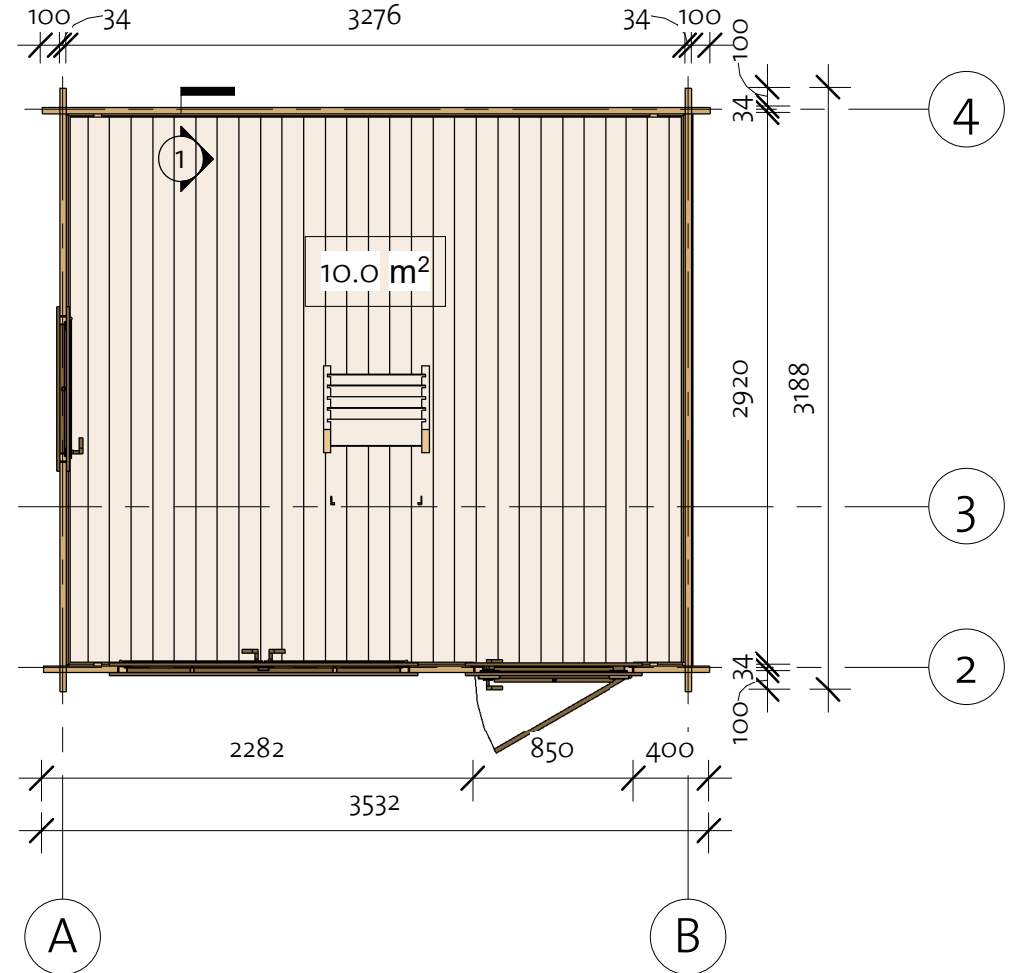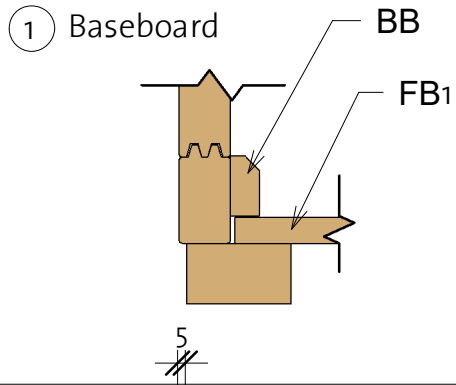Floor Plan





Floor Schedule

Mark	Type	Profile	Count	Length
FB1	FB 17x114		30	2914
FB2	FB 17x114		30	1645
BB1	BB 20x40		3	3350
BB2	BB 20x40		3	3000

Northern Bunkie 34 (335x299)

Wall 1

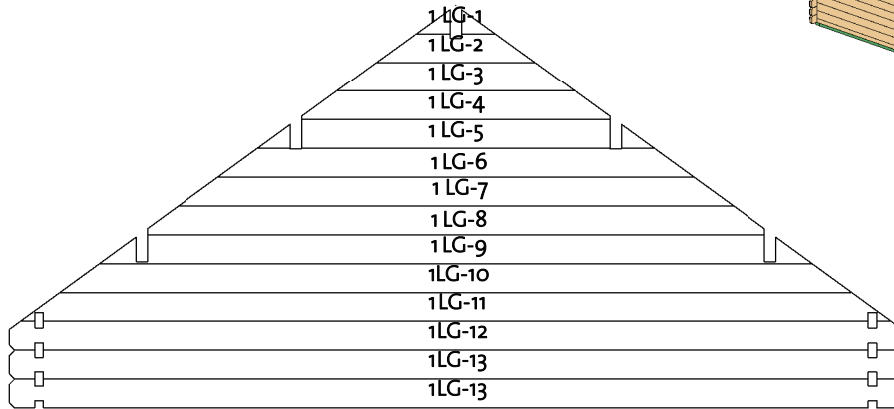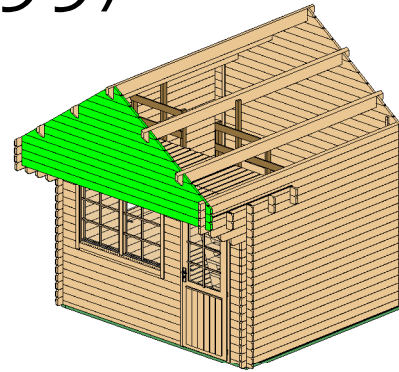


Wall 1			
Mark	Profile	Count	Cut Length

1LG-1 *	34X114	1	315
1LG-2 *	34X114	1	630
1LG-3 *	34X114	1	944
1LG-4 *	34X114	1	1221
1LG-5 *	34X114	1	1572
1LG-6 *	34X114	1	1887
1LG-7 *	34X114	1	2201
1LG-8 *	34X114	1	2450
1LG-9 *	34X114	1	2829
1LG-10*	34X114	1	3144
1LG-11 *	34X114	1	3458
1LG-12 *	34X114	1	3544
1LG-13	34X114	2	3544


* Gable - delivered premounted

Log Profile Wall 1	
Profile	Profile

34X114	
--------	---


Northern Bunkie 34 (335x299)

Wall 2

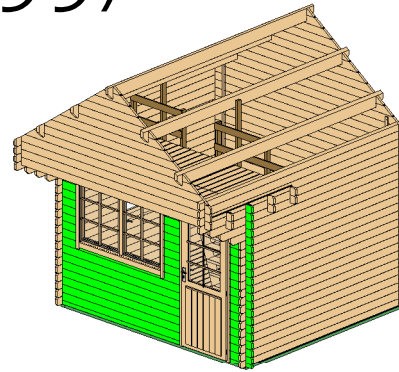

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	34X57	1	2288
2BL-2	34X57	1	406
2LG-1	34X114	9	342
2LG-2	34X114	26	406
2LG-3	34X114	2	3544
2LG-4	34X114	1	3544
2LG-5	34X114	8	2288

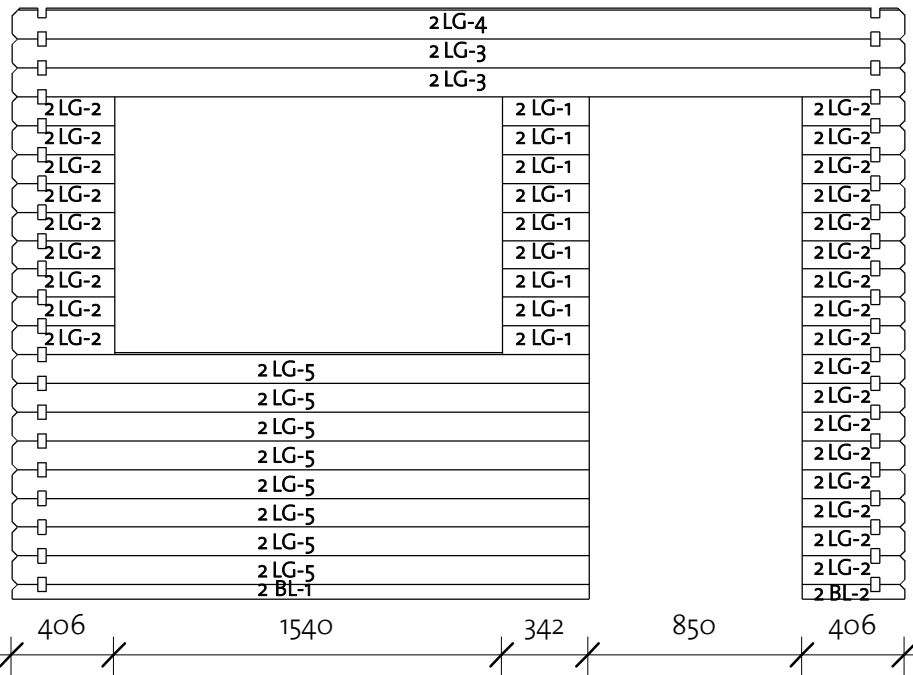


Log Profile Wall 2	
Profile	Profile

34X57	
34X114	


Northern Bunkie 34 (335x299)

Wall 3

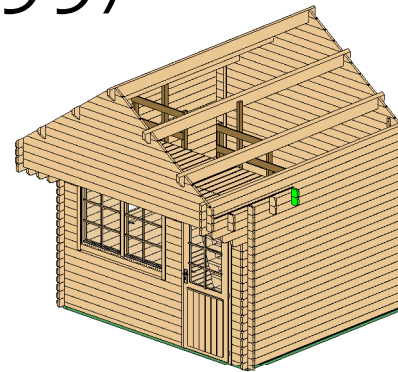

Wall 3			
Mark	Profile	Count	Cut Length

3LG-1	34x114	1	3544
3LG-2	34x114	1	3544





Log Profile Wall 3	
Profile	Profile

34x114	
34x114	

Northern Bunkie 34 (335x299)

Wall 4

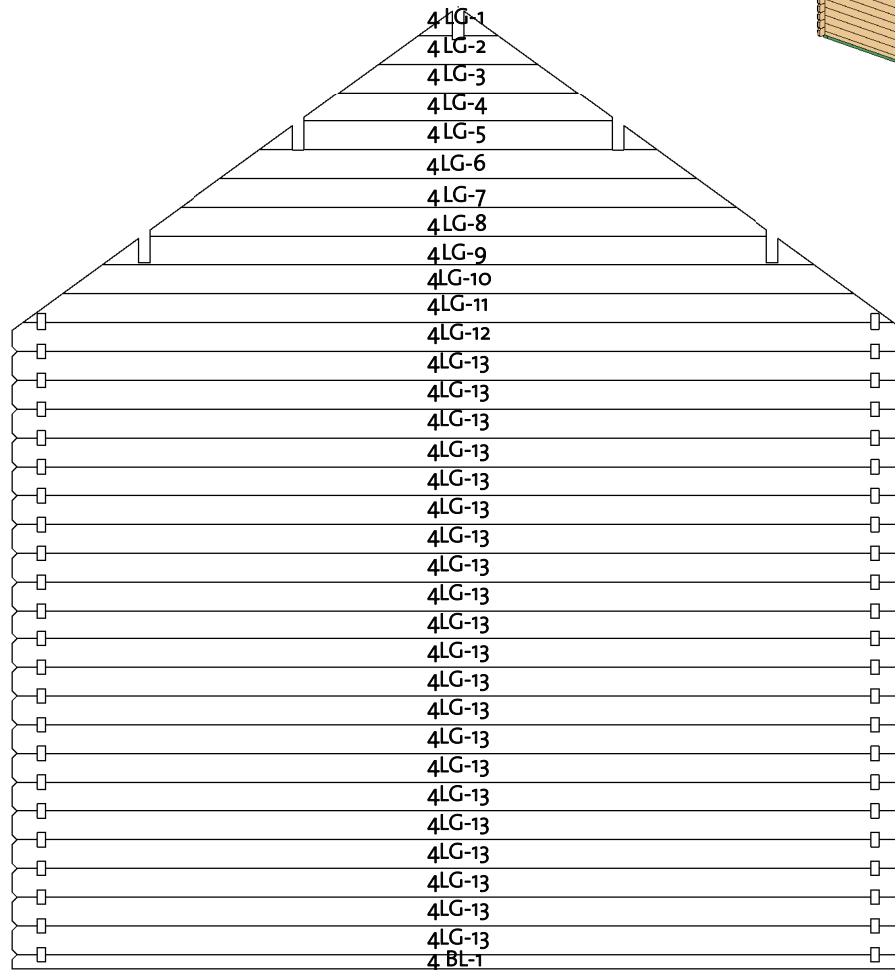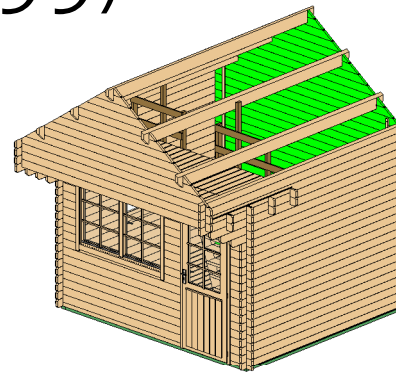



Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	34X57	1	3544
4LG-1 *	34X114	1	315
4LG-2 *	34X114	1	630
4LG-3 *	34X114	1	944
4LG-4 *	34X114	1	1221
4LG-5 *	34X114	1	1572
4LG-6 *	34X114	1	1887
4LG-7 *	34X114	1	2201
4LG-8 *	34X114	1	2450
4LG-9 *	34X114	1	2829
4LG-10*	34X114	1	3144
4LG-11 *	34X114	1	3458
4LG-12 *	34X114	1	3544
4LG-13	34X114	21	3544


* Gable - delivered premounted

Log Profile Wall 4	
Profile	Profile

34X57	
34X114	


Northern Bunkie 34 (335x299)

Wall A

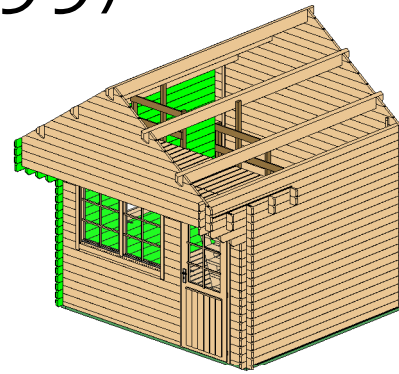

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	34X114	17	1209
ALG-2	34X114	8	3188
ALG-3	34X114	1	1409
ALG-4	34X114	1	3588
ALG-5	34X114	1	3788
ALG-6	34X114	1	3988
ALG-7	34X114	1	3988
ALG-8	34X114	1	3988
ATL-1	34X123	1	3988

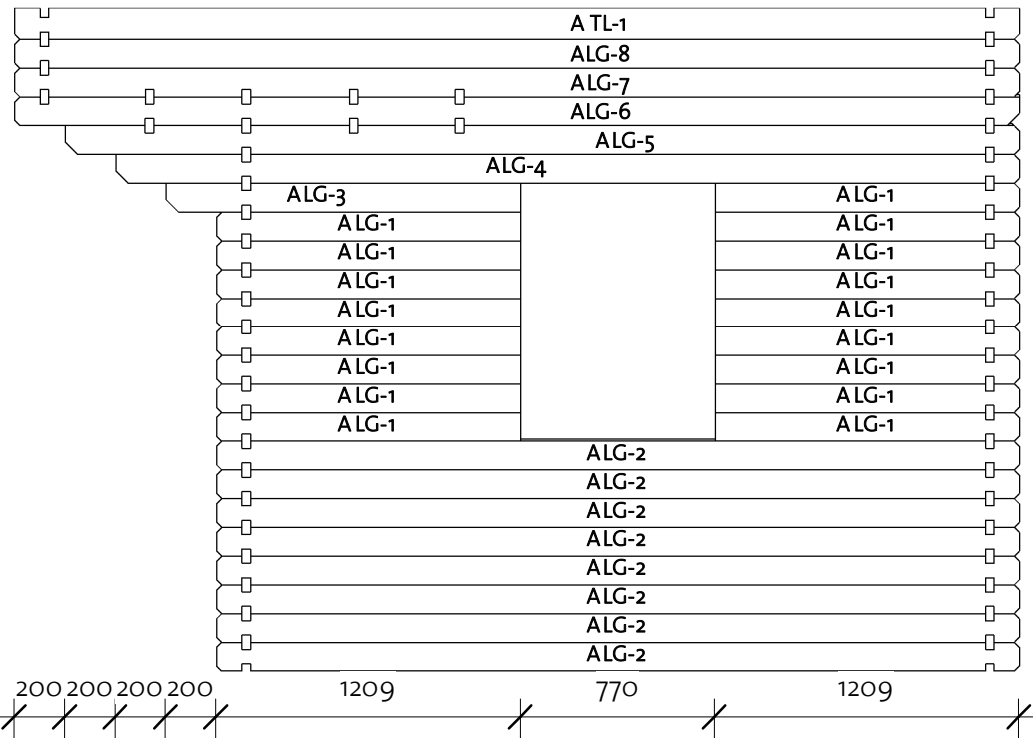


92009302_201214

Log Profile Wall A	
Profile	Profile

34X114	
34X123	


Northern Bunkie 34 (335x299)

Wall B

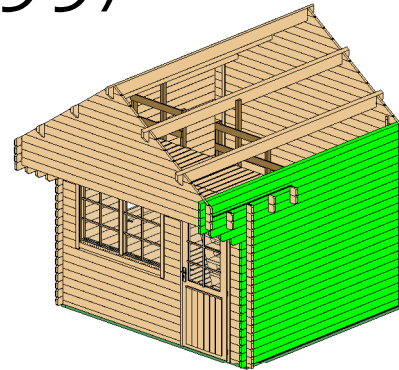

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	34x114	16	3188
BLG-2	34x114	1	3988
BLG-3	34x114	1	3388
BLG-4	34x114	1	3588
BLG-5	34x114	1	3788
BLG-6	34x114	1	3988
BLG-7	34x114	1	3988
BTL-1	34x123	1	3988

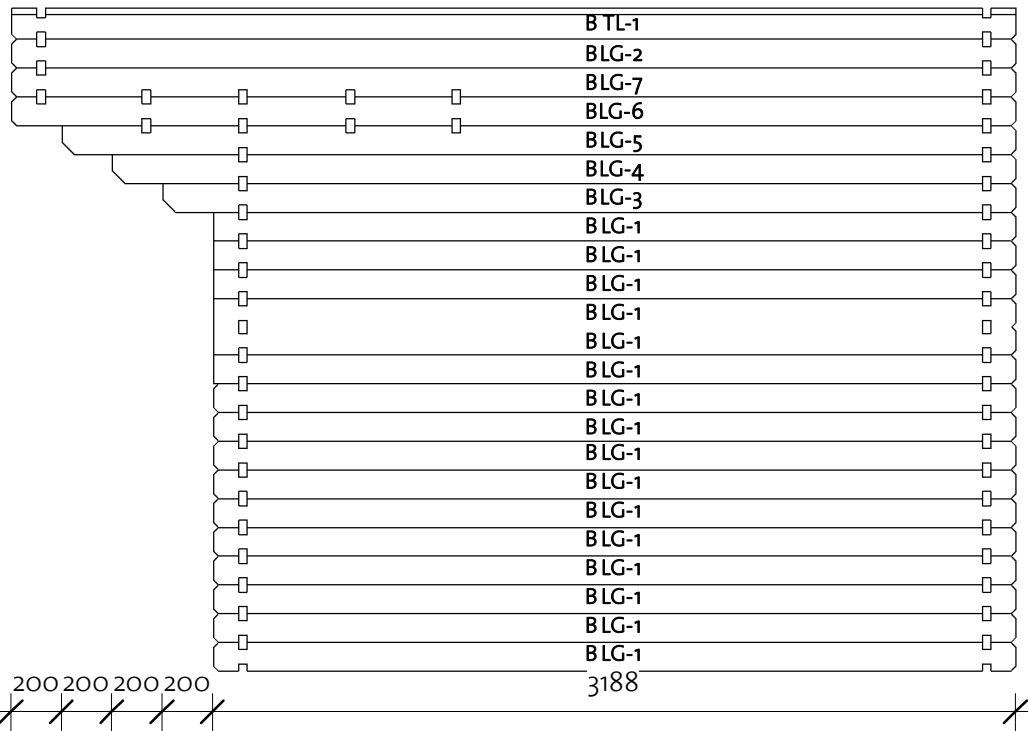


Log Profile Wall B	
Profile	Profile




34x114	
34x123	

200 200 200 200
 92009302_201214

Northern Bunkie 34 (335x299)

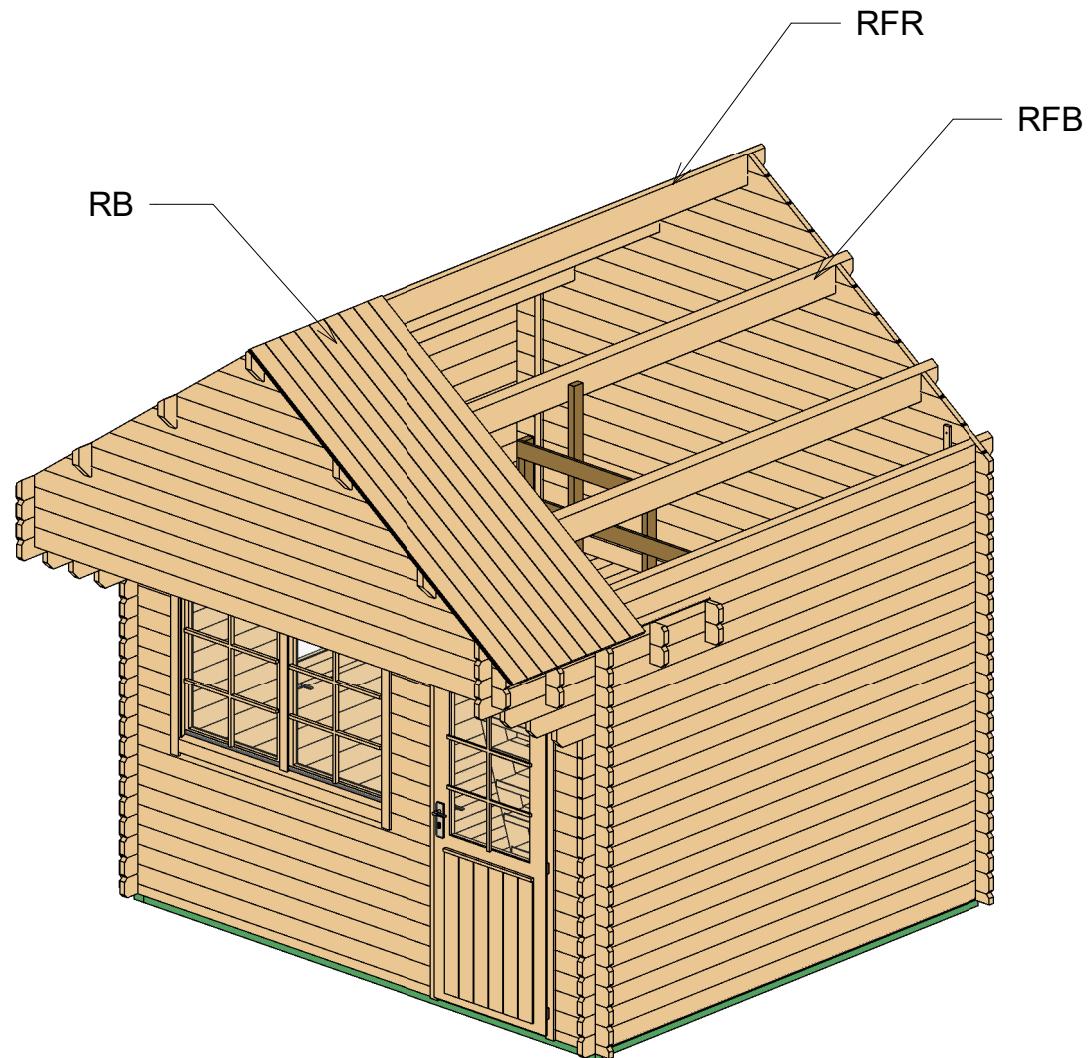Roof 1





Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 45x195		1	3988
RFB	Beam 45x195		4	3988
RB	17x114		72	2368



Northern Bunkie 34 (335x299)

Roof 2

② Facia

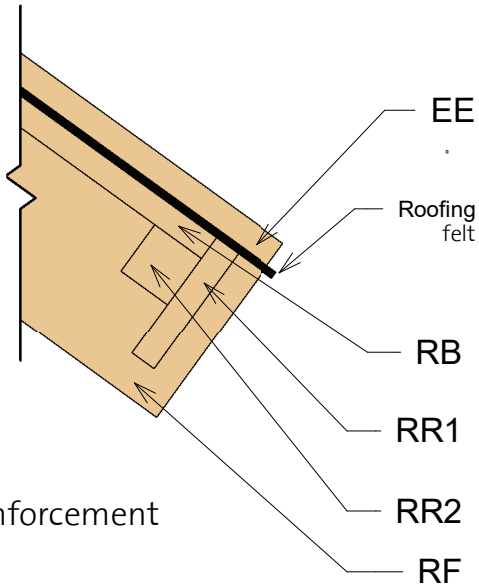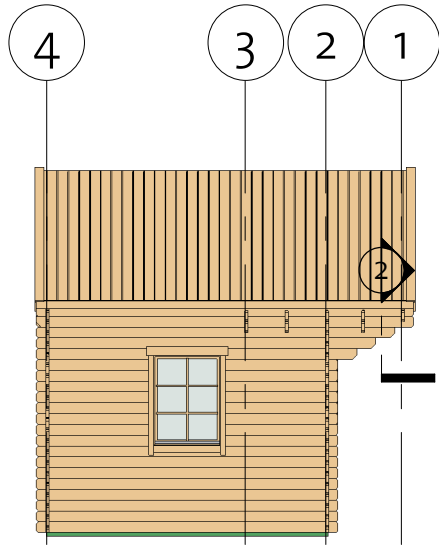

③ Roof Reinforcement

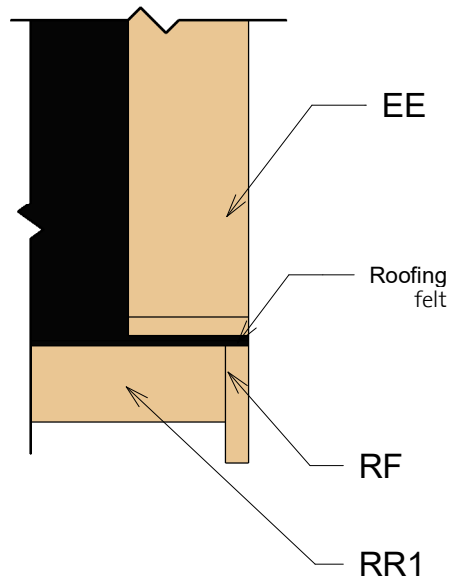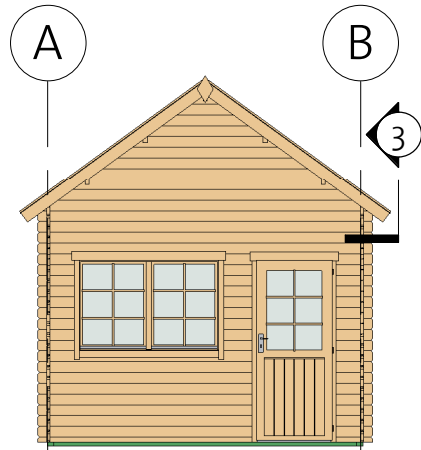




Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2407
RF	Roof Fascia 18x120		4	2407
RR1	Roof reinforcement 18x95		2	3988
RR2	Roof reinforcement 38x38		2	3988

Northern Bunkie 34 (335x299)


Second floor (5,4 m²)

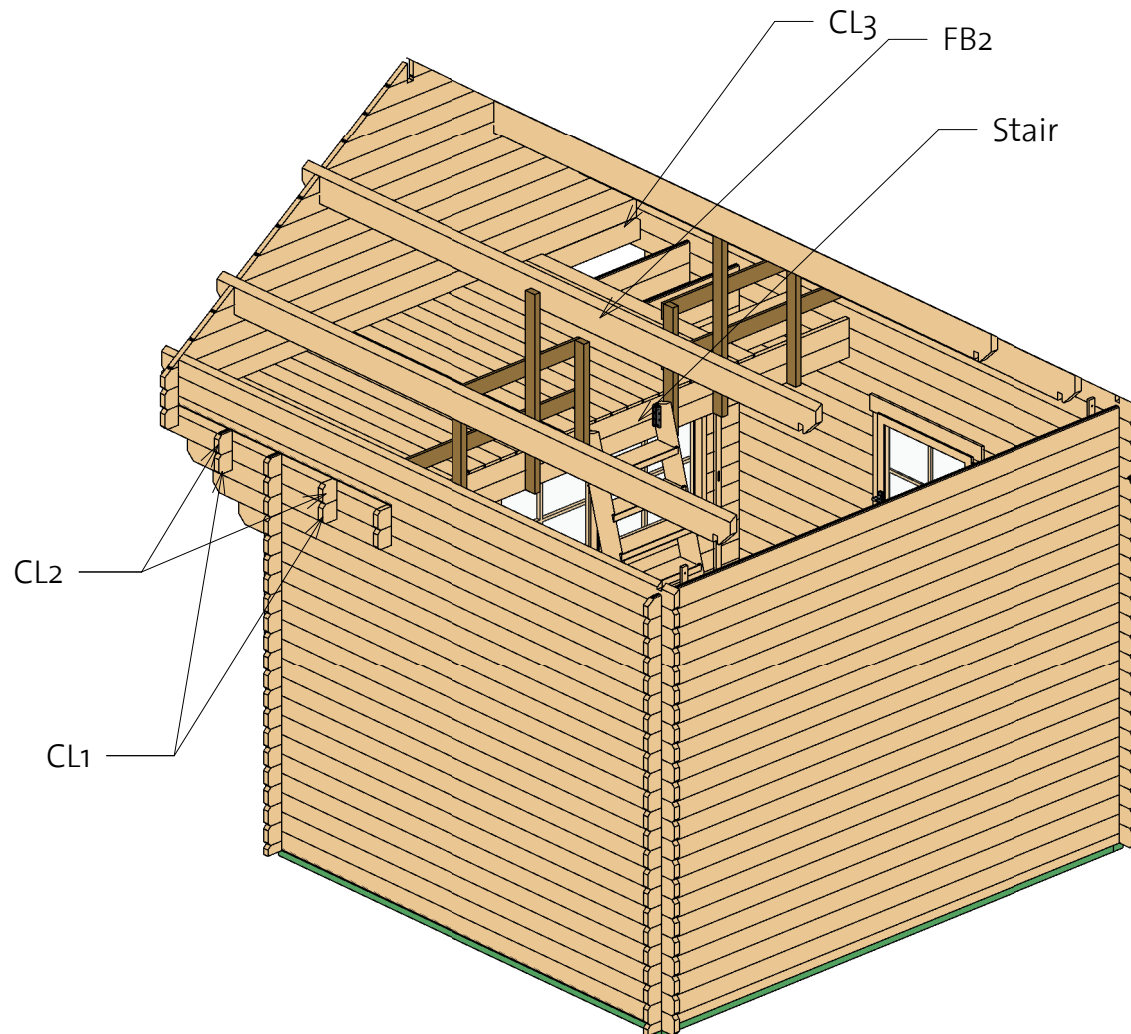

Second floor schedule				
Mark	Type	Profile	Length	Count
CL1	Log 34x114		3544	2
CL2	Log 34x114		3544	2
CL3	Log 34x114		3270	1

Northern Bunkie 34 (335x299)



Fence

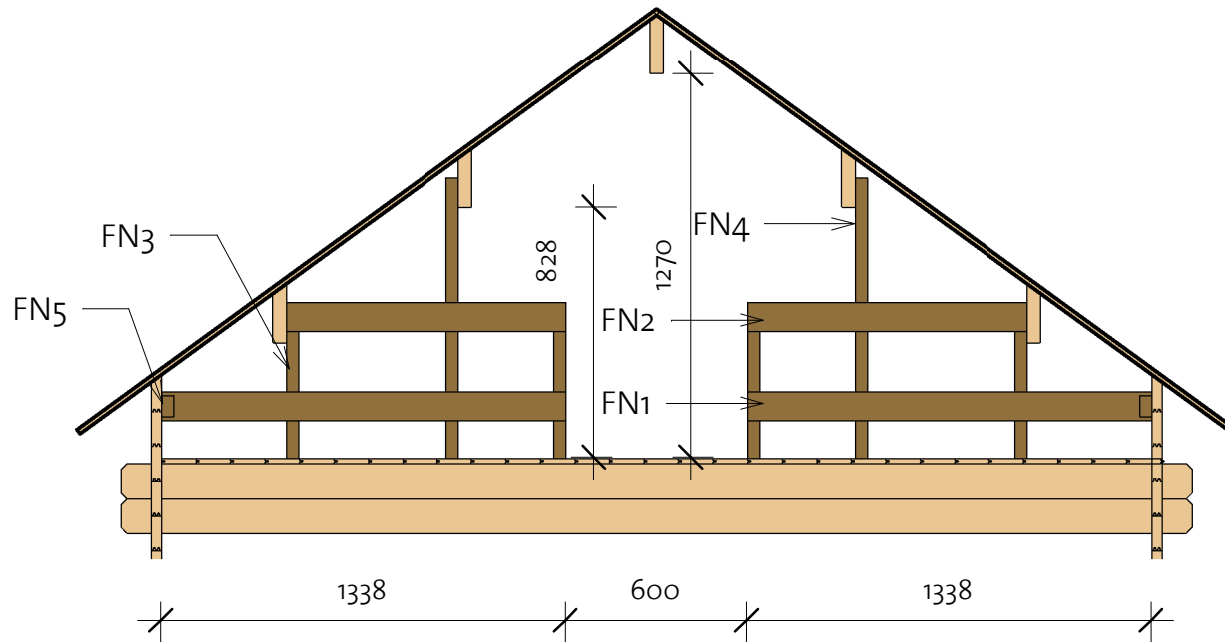




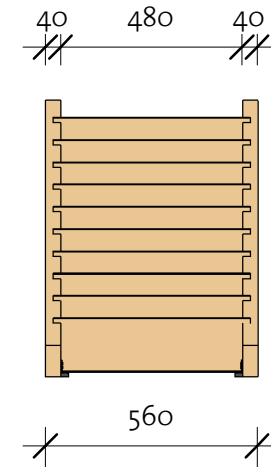
Fence schedule				
Mark	Type	Profile	Length	Count
FN1	Fence 18x95		1338	2
FN2	Fence 18x95		925	2
FN3	Fence 40x70		760	4
FN4	Fence 40x70		1170	2
FN5	Fence 70x40		90	2

Northern Bunkie 34 (335x299)

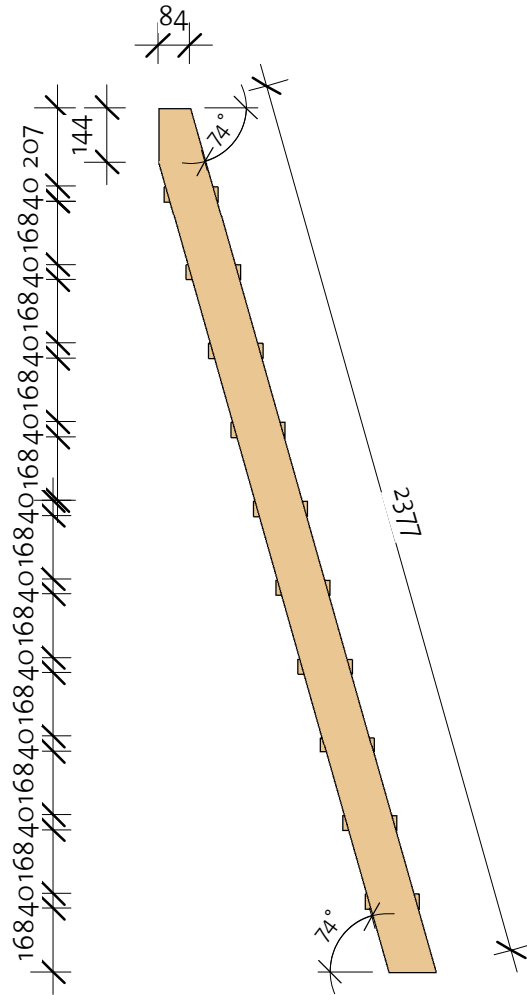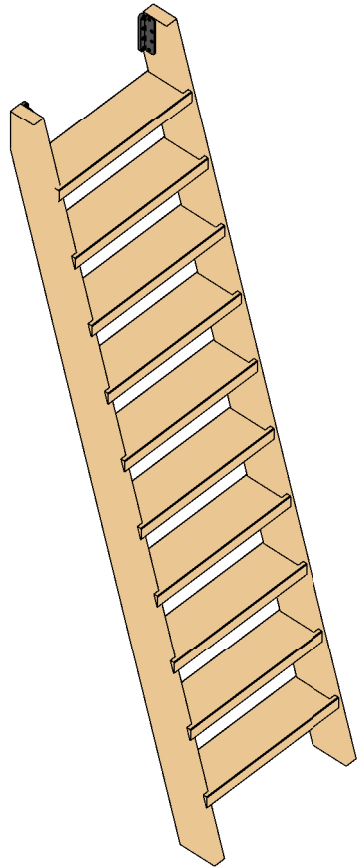Stairs




Stairs				
Mark	Profile	Profile	Count	Cut Length
ST1L	Stair 40X120		1	2400
ST1R	Stair 40X120		1	2400
ST2	Stair 143X40		10	520



Northern Bunkie 34 (335x299)

Extras

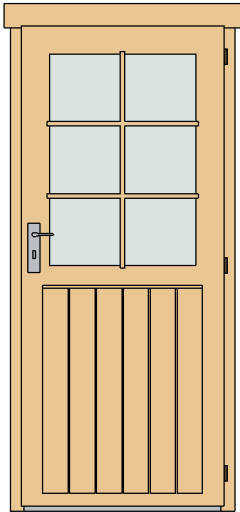


Door Schedule				
Model	Type	Width	Height	Count
B34D1R	Basic 34 door 1 right	840	1955	1
DCB6	Door Crossbar 6	--	--	1









Type	Count
------	-------

Windboard 18x40x700	2
Windboard 18x40x2200	2
Windboard 18x40x2600	2



Type	Count
------	-------

Romb	2
------	---



Hitblock	300-400 mm		
Ladder fittings			2
Bolts	M8 x 70		16
Nails	1,4 x 40		50
Screws	6,0 x 140		65
Screws	4,0 x 40		85
Screws	5,0 x 70		110
Screws	4,0 x 50		800


Window Schedule				
Mark	Type	Width	Height	Count
B34DW1	Basic 34 double window 1	1530	990	1
B34W2R	Basic 34 window 2 right	765	990	1
WCB6	Windows Crossbar 6	--	--	3

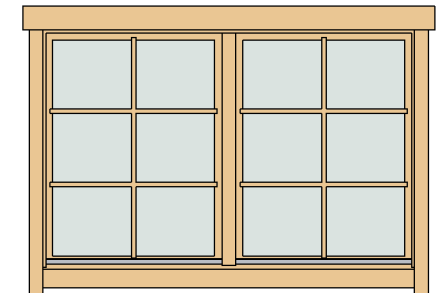




Northern Bunkie 34 (335x299)

List of all items 1



Impregnated foundation beams

Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	2978
IFB2	IFB 70x40		7	3194



Roof


Mark	Type	Profile	Count	Length
RFR	Ridge 45x195		1	3988
RFB	Beam 45x195		4	3988
RB	17x114		72	2368

Second floor schedule





Mark	Type	Profile	Count	Length
CL1	Log 34x114		2	3544
CL2	Log 34x114		2	3544
CL3	Log 34x114		1	3270

Floor Schedule

Mark	Type	Profile	Count	Length
FB1	FB 17x114		30	2914
FB2	FB 17x114		30	1645




BB1	BB 20x40		3	3350
BB2	BB 20x40		3	3000



Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2407
RF	Roof Fascia 18x120		4	2407
RR1	Roof reinforce ment 18x95		2	3988
RR2	Roof reinforce ment 38x38		2	3988

Northern Bunkie 34 (335x299)

List of all items 2

Stairs				
Mark	Profile	Profile	Count	Cut Length
ST1L	Stair 40x120		1	2400
ST1R	Stair 40x120		1	2400
ST2	Stair 143x40		10	520

Fence schedule				
Mark	Type	Profile	Length	Count
FN1	Fence 18x95		1338	2
FN2	Fence 18x95		925	2
FN3	Fence 40x70		760	4
FN4	Fence 40x70		1170	2
FN5	Fence 70x40		90	2

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	34x114	17	1209
ALG-2	34x114	8	3188
ALG-3	34x114	1	1409
ALG-4	34x114	1	3588
ALG-5	34x114	1	3788
ALG-6	34x114	1	3988
ALG-7	34x114	1	3988
ALG-8	34x114	1	3988
ATL-1	34x123	1	3988

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	34x114	16	3188
BLG-2	34x114	1	3988
BLG-3	34x114	1	3388
BLG-4	34x114	1	3588
BLG-5	34x114	1	3788
BLG-6	34x114	1	3988
BLG-7	34x114	1	3988
BTL-1	34x123	1	3988

Northern Bunkie 34 (335x299)

List of all items 3

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1 *	34X114	1	315
1LG-2 *	34X114	1	630
1LG-3 *	34X114	1	944
1LG-4 *	34X114	1	1221
1LG-5 *	34X114	1	1572
1LG-6 *	34X114	1	1887
1LG-7 *	34X114	1	2201
1LG-8 *	34X114	1	2450
1LG-9 *	34X114	1	2829
1LG-10*	34X114	1	3144
1LG-11 *	34X114	1	3458
1LG-12 *	34X114	1	3544
1LG-13	34X114	2	3544

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	34X57	1	3544
4LG-1 *	34X114	1	315
4LG-2 *	34X114	1	630
4LG-3 *	34X114	1	944
4LG-4 *	34X114	1	1221
4LG-5 *	34X114	1	1572
4LG-6 *	34X114	1	1887
4LG-7 *	34X114	1	2201
4LG-8 *	34X114	1	2450
4LG-9 *	34X114	1	2829
4LG-10*	34X114	1	3144
4LG-11 *	34X114	1	3458
4LG-12*	34X114	1	3544
4LG-13	34X114	21	3544

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	34X57	1	2288
2BL-2	34X57	1	406
2LG-1	34X114	9	342
2LG-2	34X114	26	406
2LG-3	34X114	2	3544
2LG-4	34X114	1	3544
2LG-5	34X114	8	2288




Wall 3			
Mark	Profile	Count	Cut Length


3LG-1	34X114	1	3544
3LG-2	34X114	1	3544

* Gable - delivered premounted

Log profiles	
Profile	Profile

Log profiles	
Profile	Profile

34X57	
34X114	
34X114	

34X123	
34X123	