

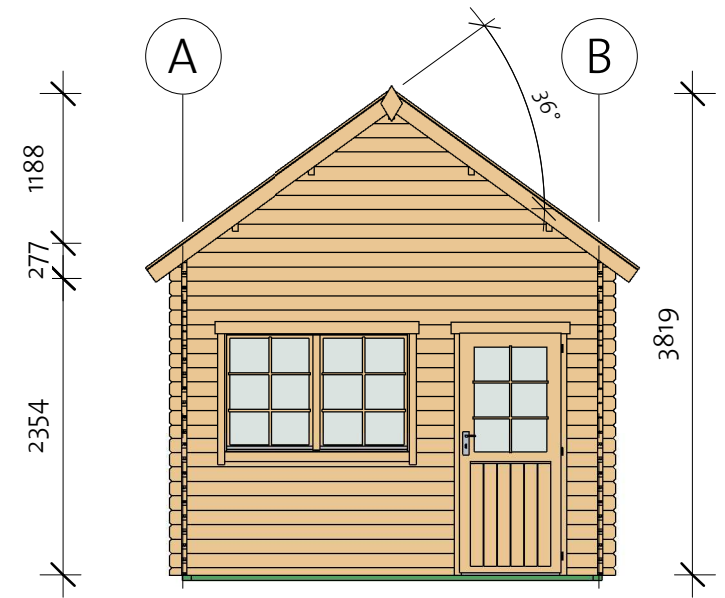


# Northern Bunkie 40 (335x299)

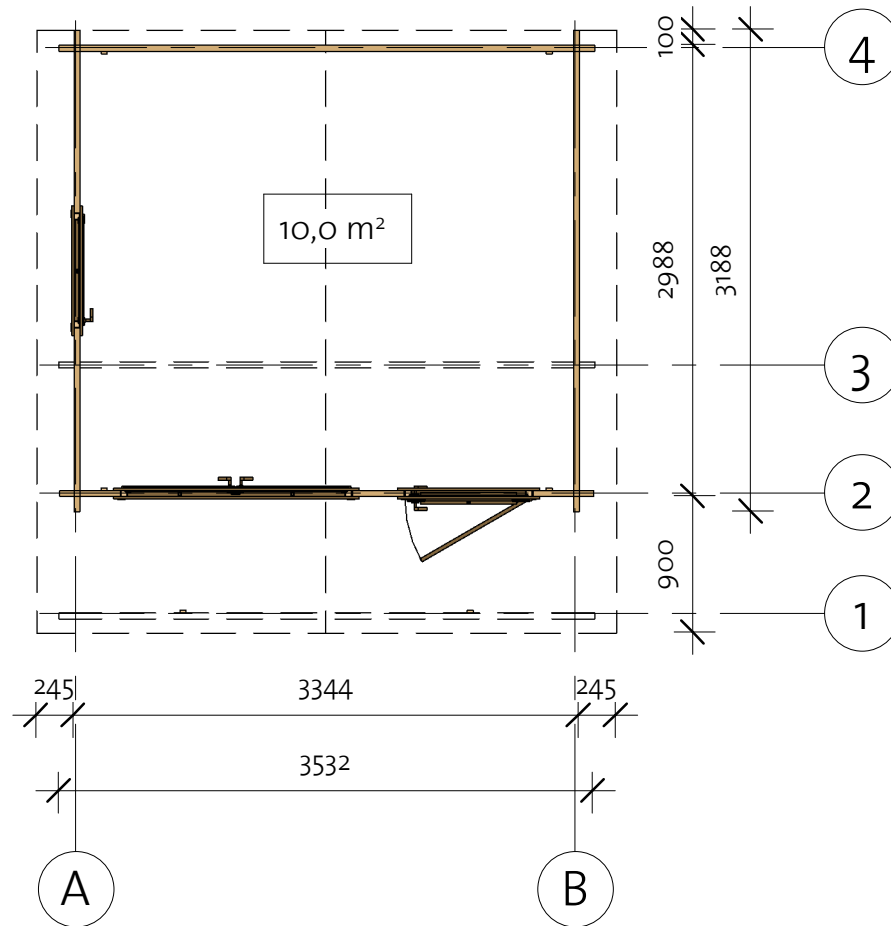


# Northern Bunkie 40 (335x299)

Foundation

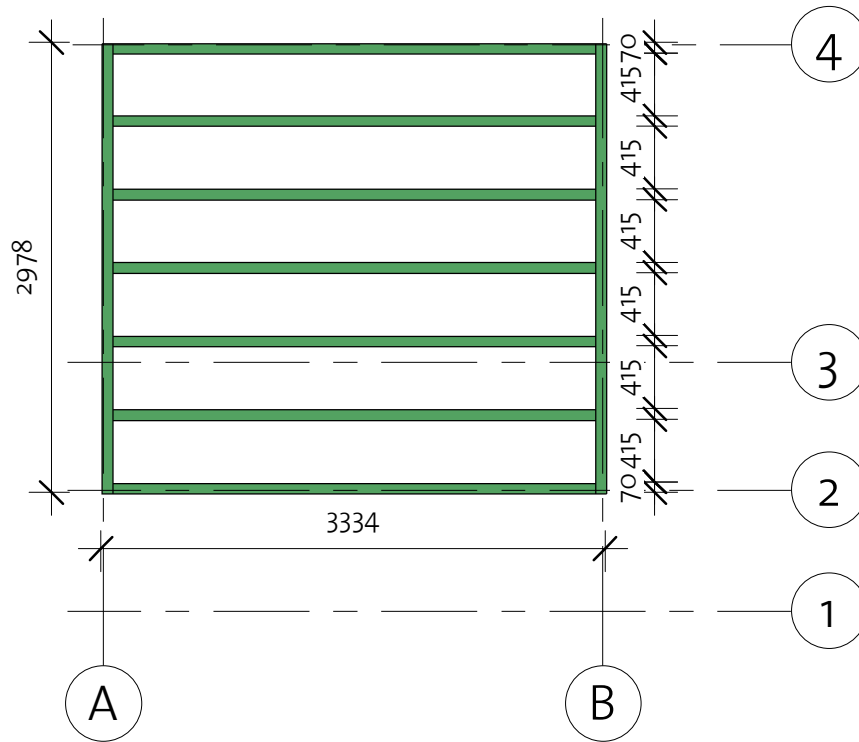


Impregnated foundation beams				
Mark	Type	Profile	Count	Length


IFB1	IFB 70x40		2	2978
IFB2	IFB 70x40		7	3194

# Northern Bunkie 40 (335x299)

Floor Plan


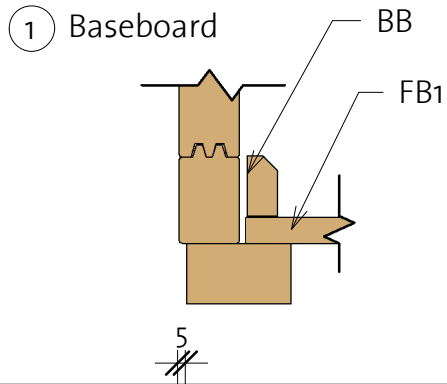


Floor Schedule				
Mark	Type	Profile	Count	Length
FB1	FB 17x114		30	2900
FB2	FB 17x114		30	1645
BB1	BB 20x40		3	3350
BB2	BB 20x40		3	3000

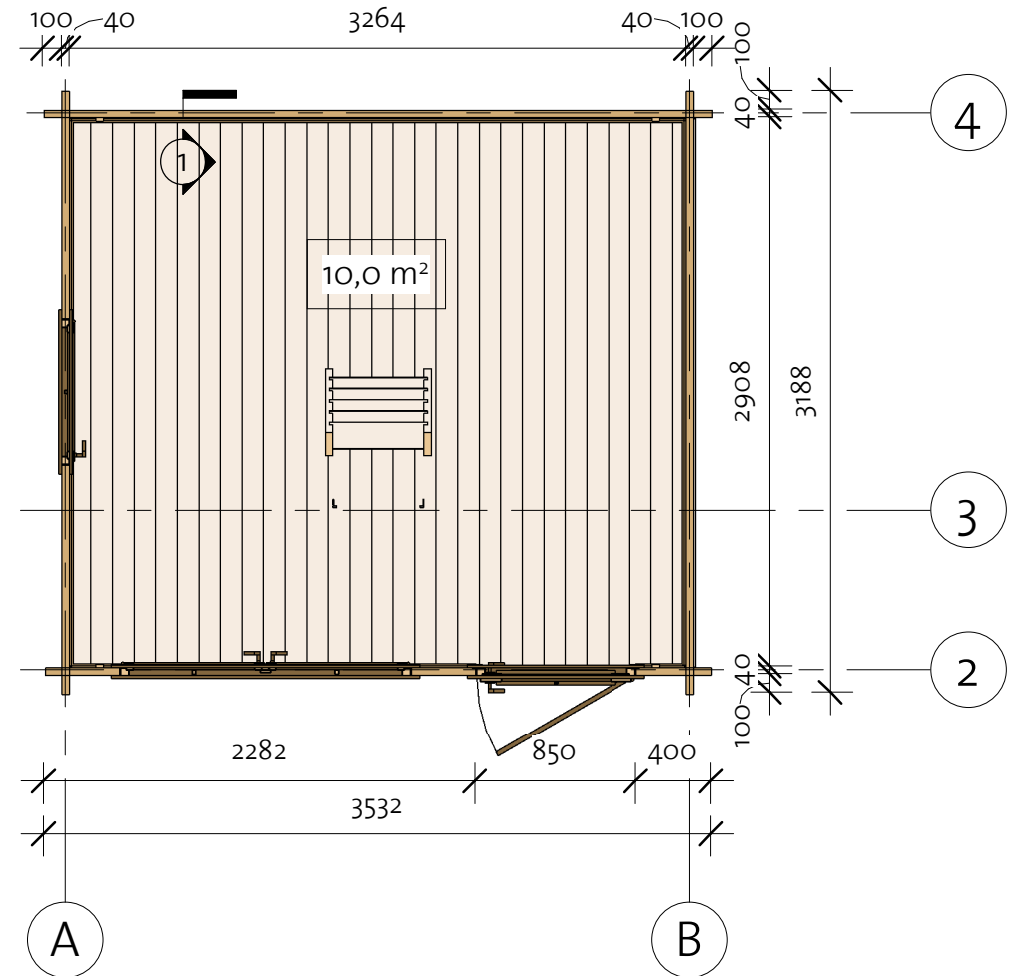

# Northern Bunkie 40 (335x299)

Wall 1

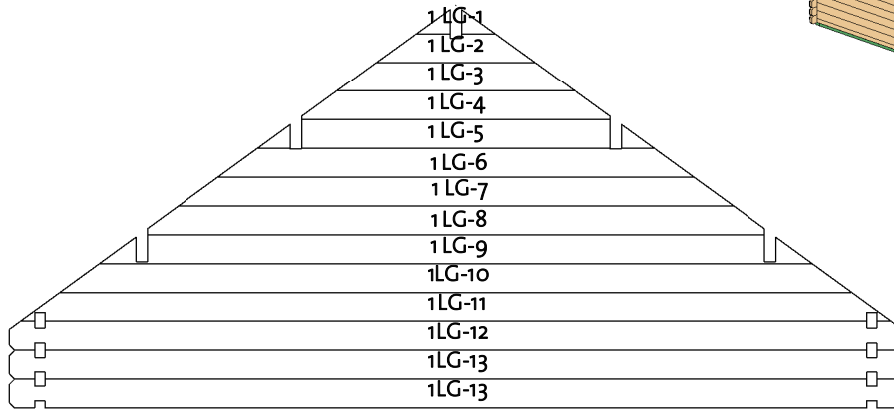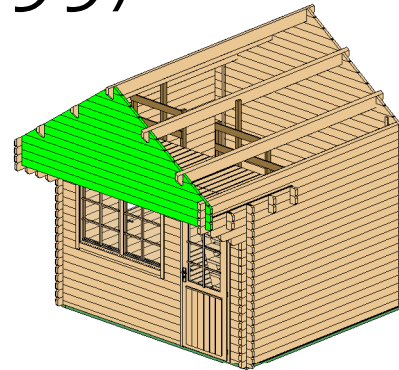

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1 *	40X114	1	315
1LG-2 *	40X114	1	630
1LG-3 *	40X114	1	944
1LG-4 *	40X114	1	1221
1LG-5 *	40X114	1	1572
1LG-6 *	40X114	1	1887
1LG-7 *	40X114	1	2201
1LG-8 *	40X114	1	2450
1LG-9 *	40X114	1	2829
1LG-10*	40X114	1	3144
1LG-11 *	40X114	1	3458
1LG-12 *	40X114	1	3544
1LG-13	40X114	2	3544


\* Gable - delivered premounted

Log Profile Wall 1	
Profile	Profile

40X114	
--------	--


# Northern Bunkie 40 (335x299)

Wall 2

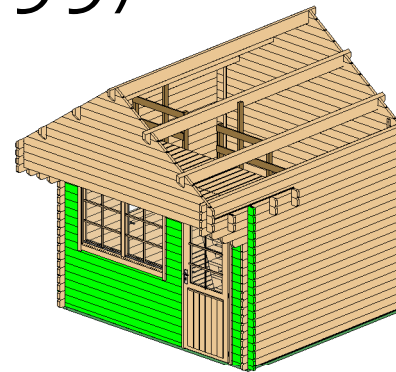

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	1	2288
2BL-2	40X57	1	406
2LG-1	40X114	9	342
2LG-2	40X114	26	406
2LG-3	40X114	2	3544
2LG-4	40X114	1	3544
2LG-5	40X114	8	2288

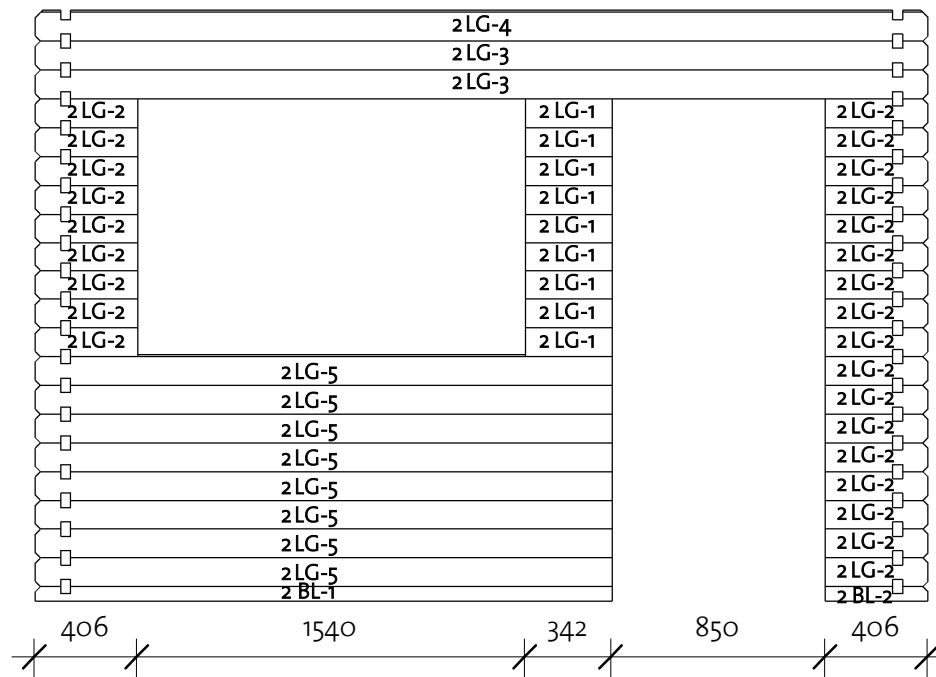


Log Profile Wall 2	
Profile	Profile

40X57	
40X114	


# Northern Bunkie 40 (335x299)

Wall 3

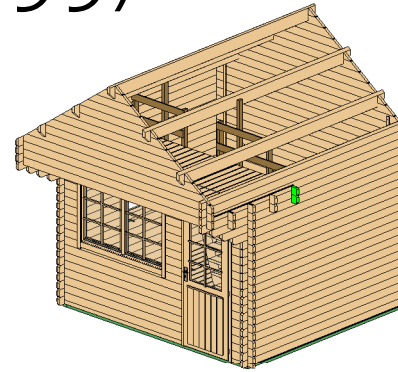

Wall 3			
Mark	Profile	Count	Cut Length

3LG-1	40X114	1	3544
3LG-2	40X114	1	3544





Log Profile Wall 3	
Profile	Profile

40X114	
40X114	

# Northern Bunkie 40 (335x299)

Wall 4

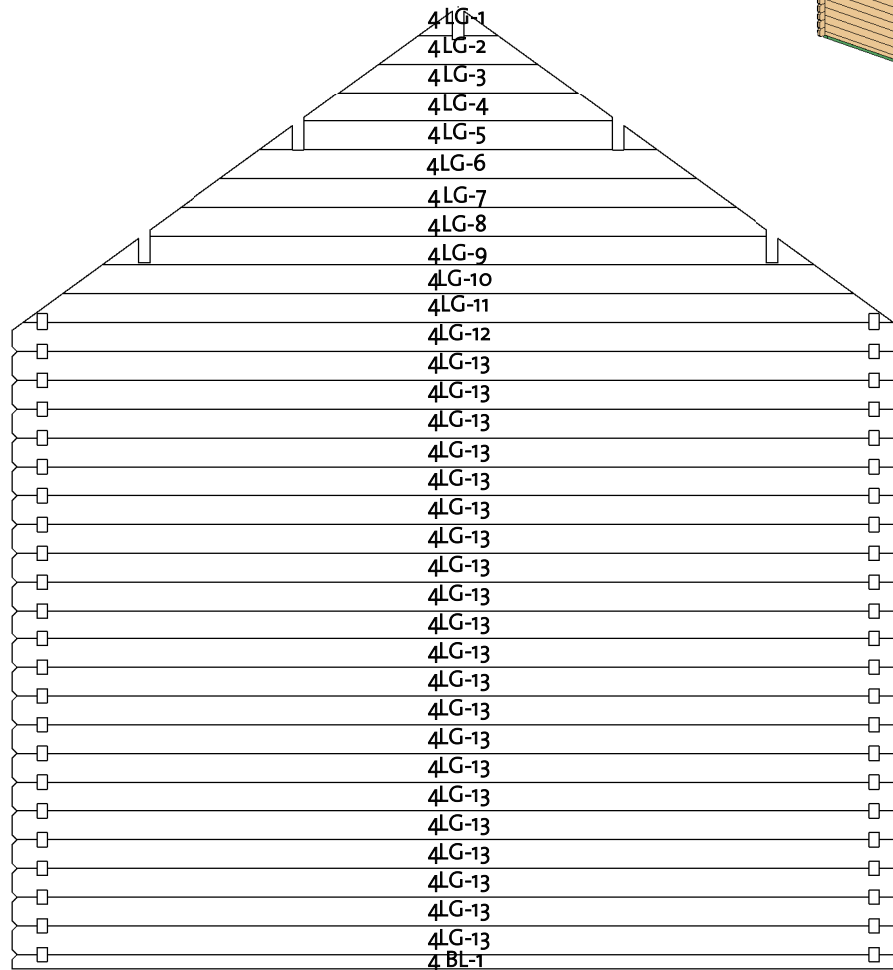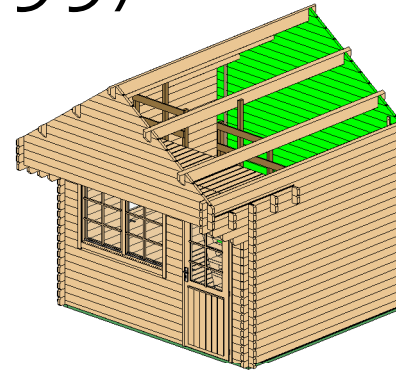

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40X57	1	3544
4LG-1 *	40X114	1	315
4LG-2 *	40X114	1	630
4LG-3 *	40X114	1	944
4LG-4 *	40X114	1	1221
4LG-5 *	40X114	1	1572
4LG-6 *	40X114	1	1887
4LG-7 *	40X114	1	2201
4LG-8 *	40X114	1	2450
4LG-9 *	40X114	1	2829
4LG-10 *	40X114	1	3144
4LG-11 *	40X114	1	3458
4LG-12 *	40X114	1	3544
4LG-13	40X114	21	3544


\* Gable - delivered premounted

Log Profile Wall 4	
Profile	Profile

40X57	
40X114	


# Northern Bunkie 40 (335x299)

Wall A

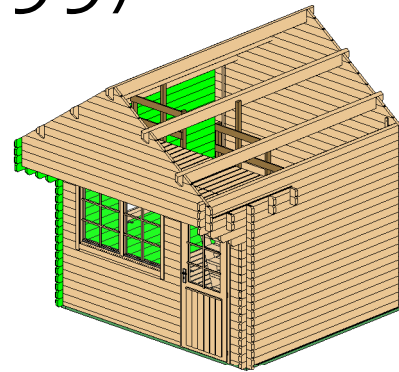

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40X114	17	1209
ALG-2	40X114	8	3188
ALG-3	40X114	1	1409
ALG-4	40X114	1	3588
ALG-5	40X114	1	3788
ALG-6	40X114	1	3988
ALG-7	40X114	1	3988
ALG-8	40X114	1	3988
ATL-1	40X123	1	3988

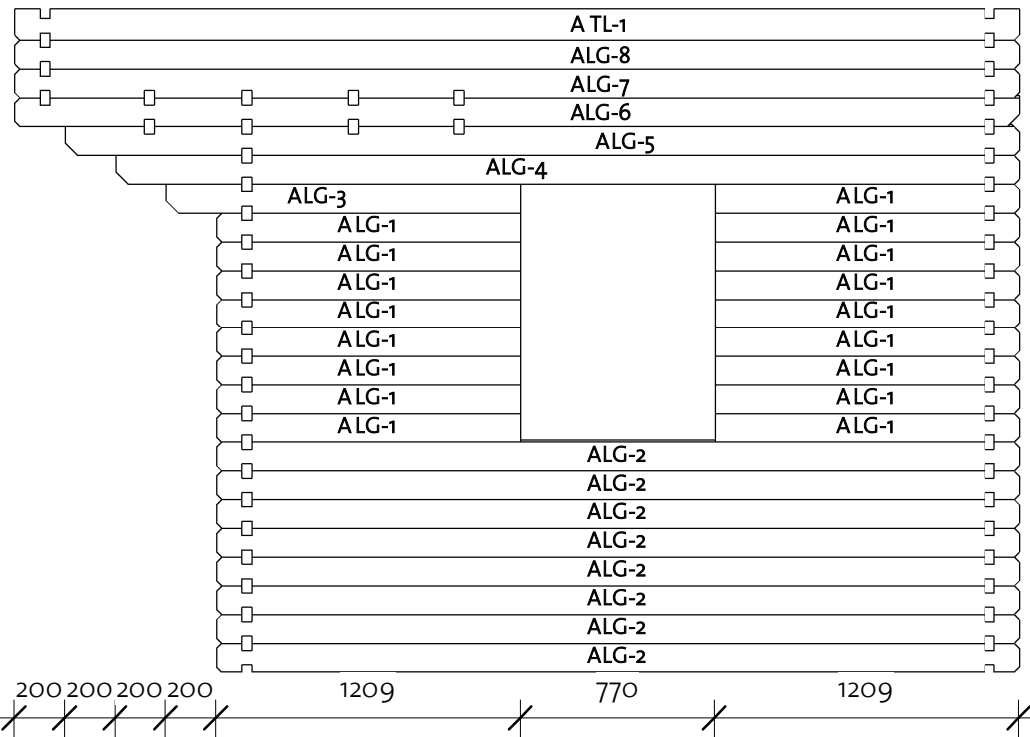

200 200 200 200  
92309153\_231011


Log Profile Wall A	
Profile	Profile

40X114	
40X123	




# Northern Bunkie 40 (335x299)

Wall B

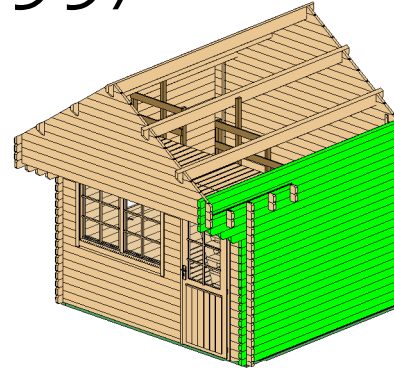

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40X114	16	3188
BLG-2	40X114	1	3988
BLG-3	40X114	1	3388
BLG-4	40X114	1	3588
BLG-5	40X114	1	3788
BLG-6	40X114	1	3988
BLG-7	40X114	1	3988
BTL-1	40X123	1	3988

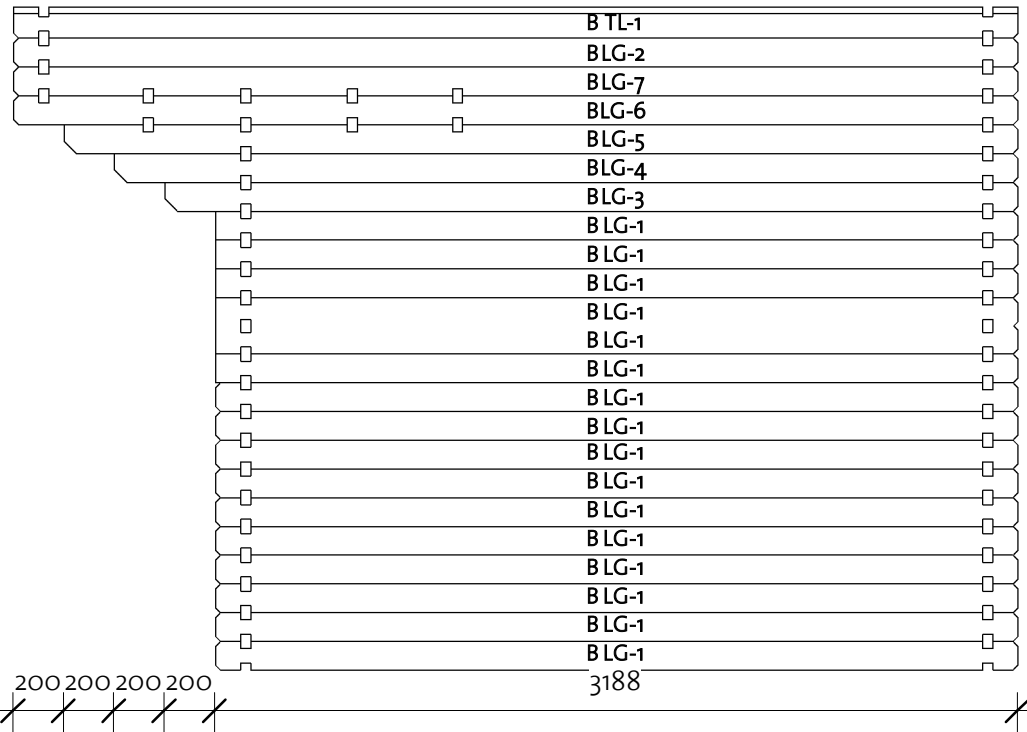


Log Profile Wall B	
Profile	Profile




40X114	
40X123	

92309153\_231011

# Northern Bunkie 40 (335x299)

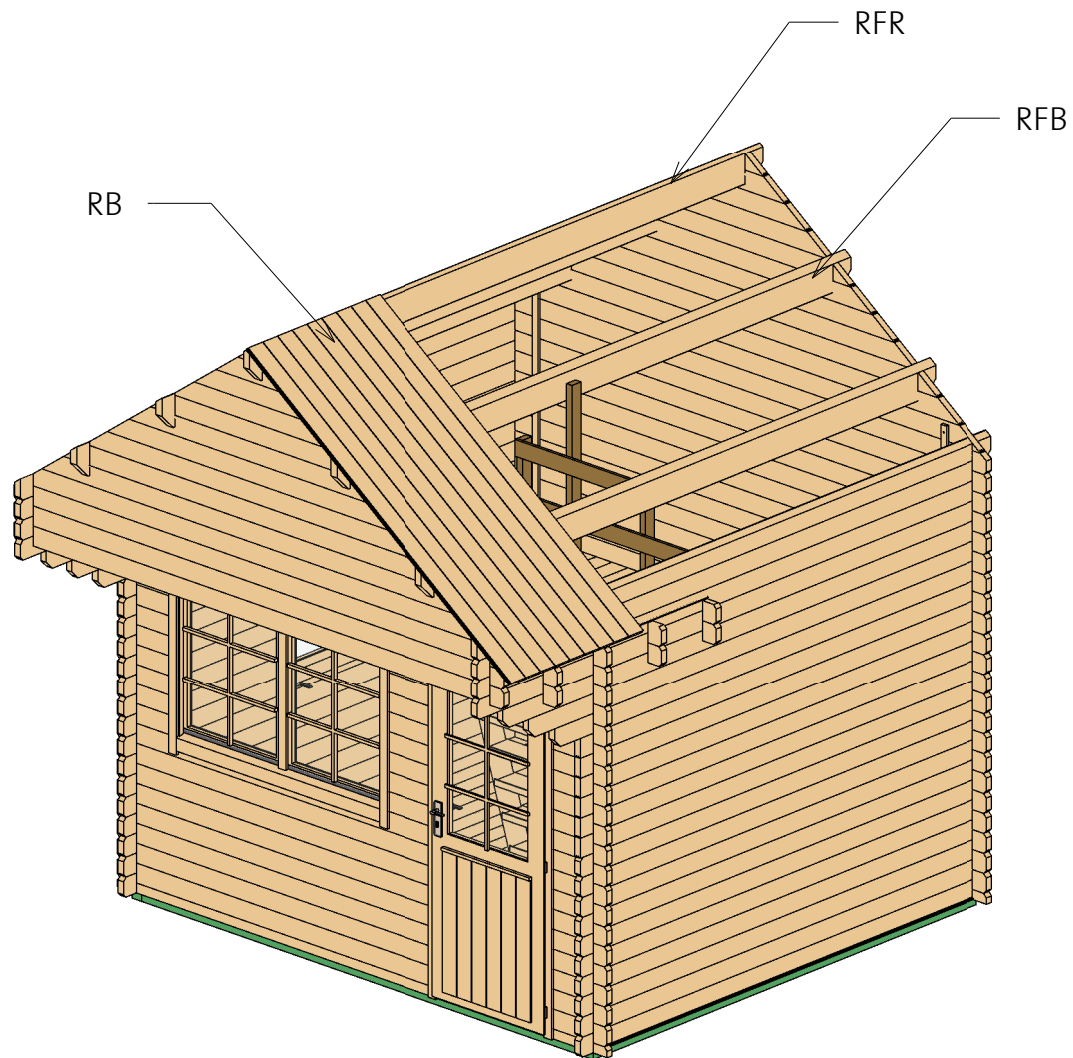
Roof 1




Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 45x195		1	3988
RFB	Beam 45x195		4	3988
RB	17x114		72	2368

# Northern Bunkie 40 (335x299)



Roof 2

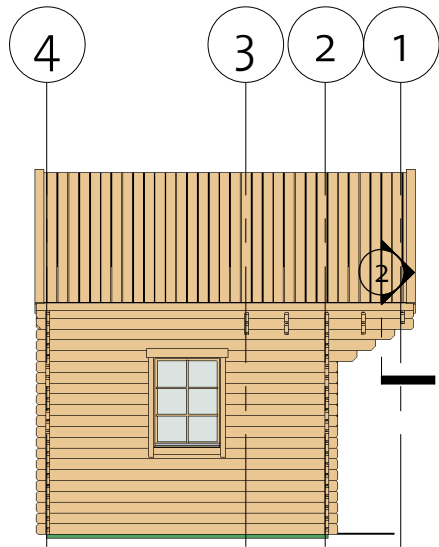

② Facia

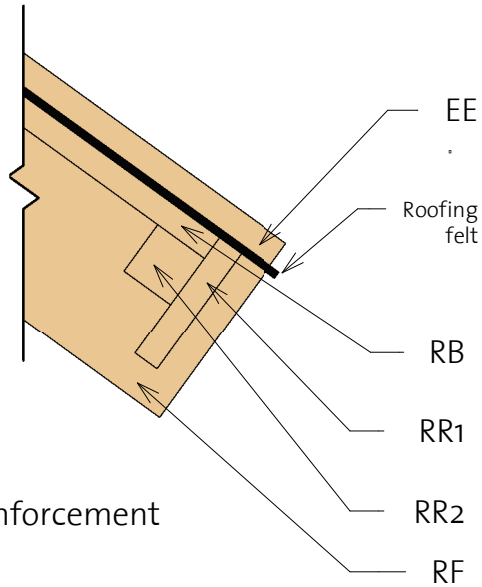

③ Roof Reinforcement

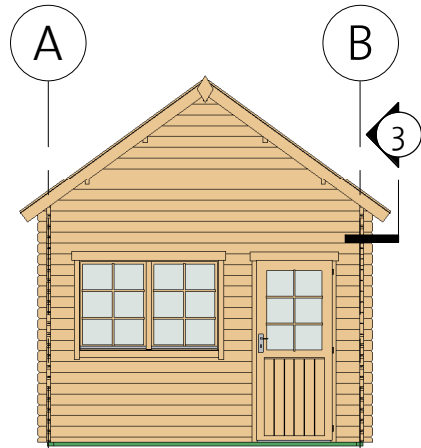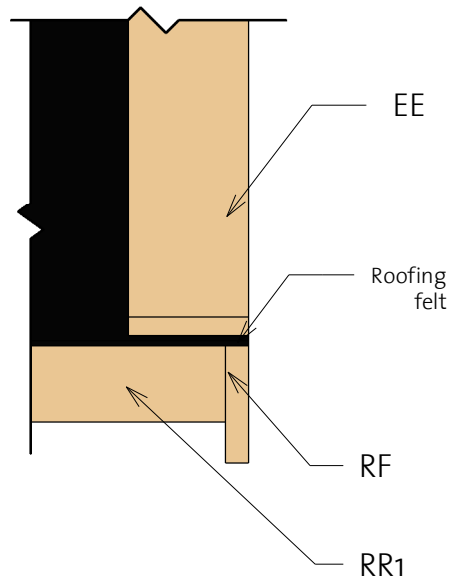




Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2407
RF	Roof Fascia 18x120		4	2407
RR1	Roof reinforce ment 18x95		2	3988
RR2	Roof reinforce ment 38x38		2	3988

# Northern Bunkie 40 (335x299)



Second floor (5,4 m<sup>2</sup>)

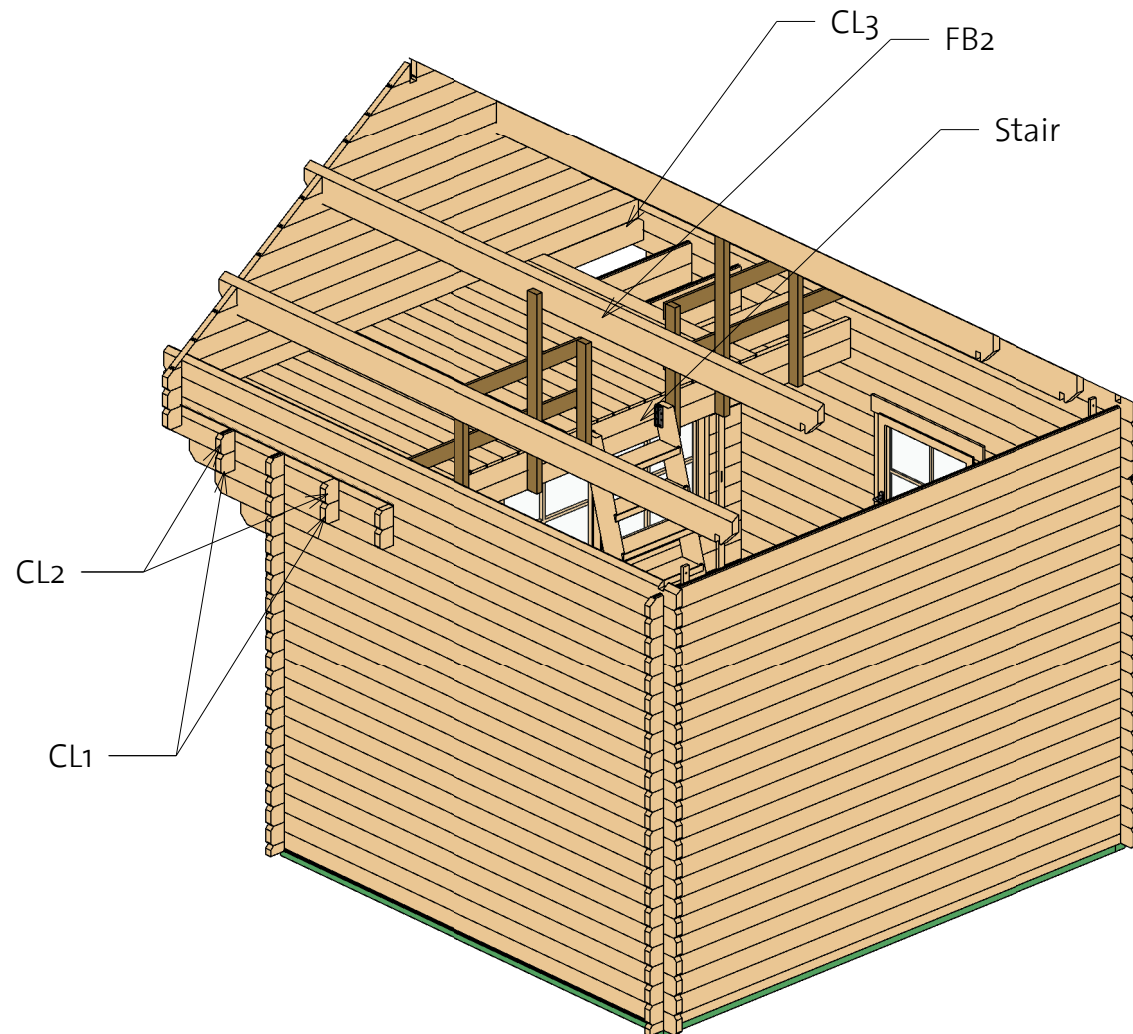




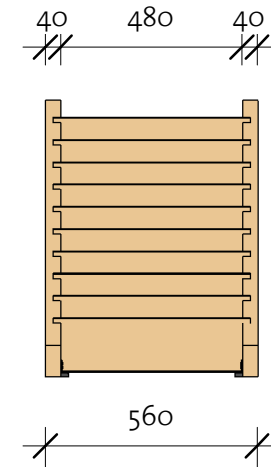
Second floor schedule				
Mark	Type	Profile	Count	Length
CL1	Log 40x114		2	3544
CL2	Log 40x114		2	3544
CL3	Log 40x114		1	3264

# Northern Bunkie 40 (335x299)

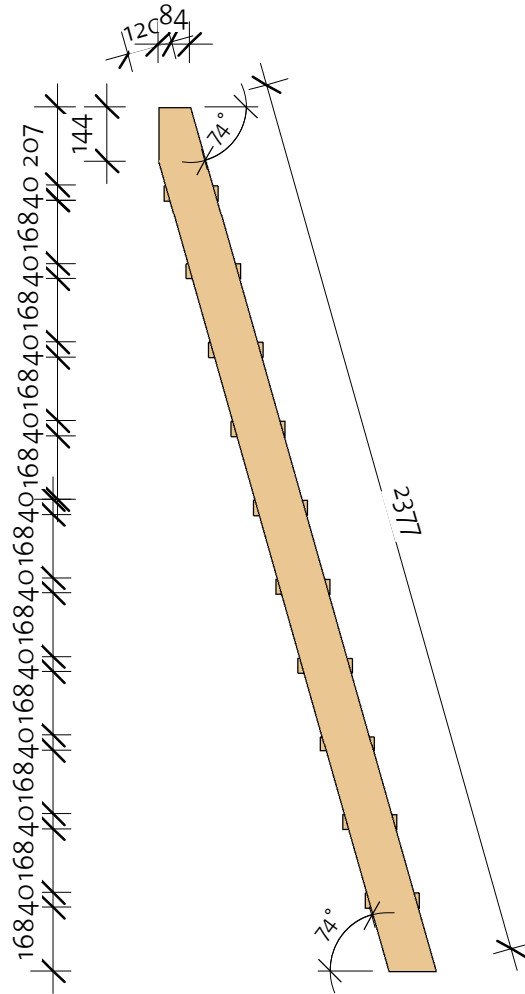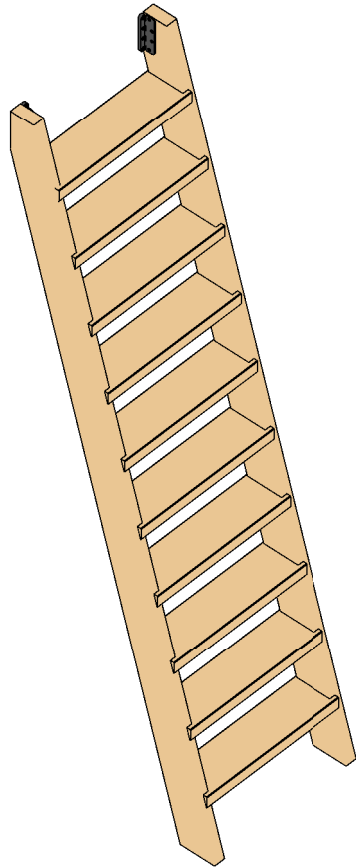Stairs






Stairs				
Mark	Profile	Profile	Count	Cut Length
ST1L	Stair 40X120		1	2400
ST1R	Stair 40X120		1	2400
ST2	Stair 143X40		10	520



# Northern Bunkie 40 (335x299)

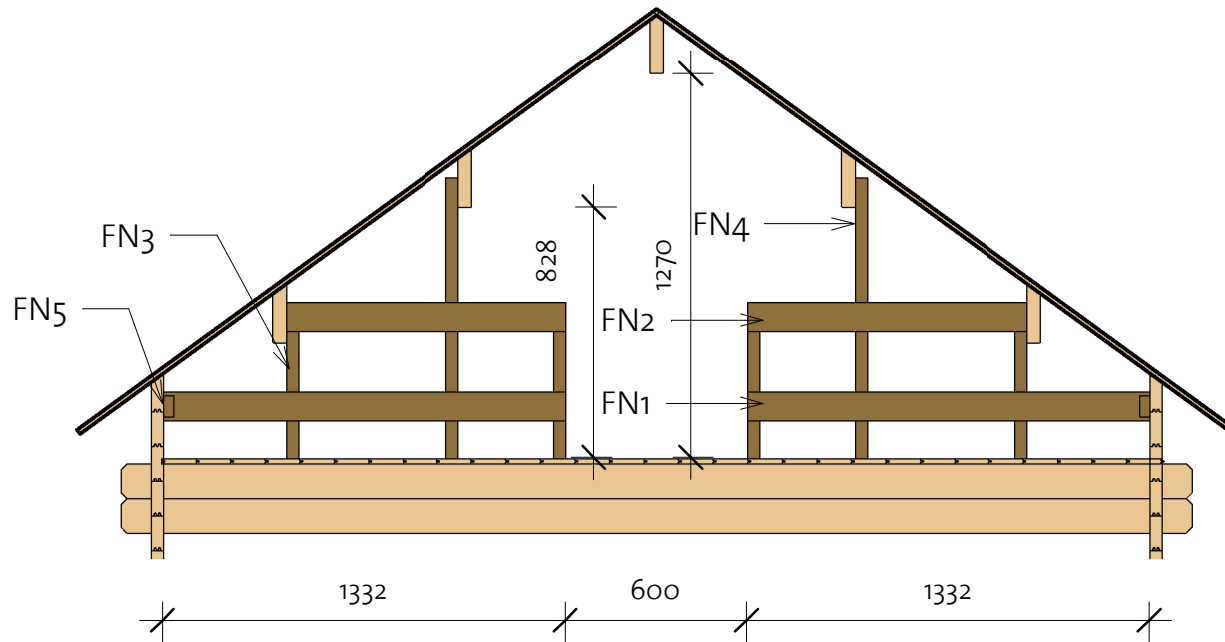Fence



Fence schedule				
Mark	Type	Profile	Length	Count
FN1	Fence 18x95		1332	2
FN2	Fence 18x95		925	2
FN3	Fence 40x70		760	4
FN4	Fence 40x70		1170	2
FN5	Fence 70x40		90	2

# Northern Bunkie 40 (335x299)

Extras




Door Schedule				
Model	Type	Width	Height	Count
CD4R	Classic door 4 right	840	1955	1
DCB6	Door Crossbar 6	--	--	1








Type	Count
------	-------

Windboard 18x40x700	2
Windboard 18x40x2200	2
Windboard 18x40x2600	2



Type	Count
------	-------

Romb	2
------	---



Hitblock	300-400 mm		
Ladder fittings			2
Bolts	M8 x 70		16
Nails	1,4 x 40		50
Screws	6,0 x 140		65
Screws	5,0 x 70		110
Screws	4,0 x 40		885


Window Schedule				
Mark	Type	Width	Height	Count
CDW1	Classic double window 1	1530	990	1
CW1R	Classic window 1 right	765	990	1
WCB6	Windows Crossbar 6	--	--	3

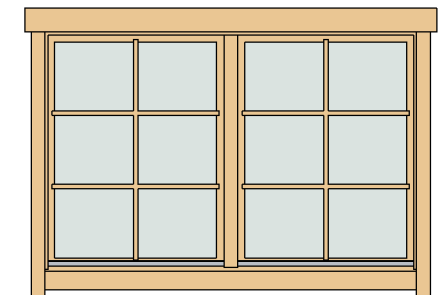




# Northern Bunkie 40 (335x299)

## List of all items 1



### Impregnated foundation beams

Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	2978
IFB2	IFB 70x40		7	3194



### Roof


Mark	Type	Profile	Count	Length
RFR	Ridge 45x195		1	3988
RFB	Beam 45x195		4	3988
RB	17x114		72	2368

### Second floor schedule





Mark	Type	Profile	Count	Length
CL1	Log 40x114		2	3544
CL2	Log 40x114		2	3544
CL3	Log 40x114		1	3264

### Floor Schedule

Mark	Type	Profile	Count	Length
FB1	FB 17x114		30	2900
FB2	FB 17x114		30	1645

BB1	BB 20x40		3	3350
BB2	BB 20x40		3	3000




### Fascia Schedule



Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2407
RF	Roof Fascia 18x120		4	2407
RR1	Roof reinforce ment 18x95		2	3988
RR2	Roof reinforce ment 38x38		2	3988



# Northern Bunkie 40 (335x299)

## List of all items 2

Stairs				
Mark	Profile	Profile	Count	Cut Length
ST1L	Stair 40X120		1	2400
ST1R	Stair 40X120		1	2400
ST2	Stair 143X40		10	520

Fence schedule				
Mark	Type	Profile	Length	Count
FN1	Fence 18x95		1332	2
FN2	Fence 18x95		925	2
FN3	Fence 40x70		760	4
FN4	Fence 40x70		1170	2
FN5	Fence 70x40		90	2

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40X114	17	1209
ALG-2	40X114	8	3188
ALG-3	40X114	1	1409
ALG-4	40X114	1	3588
ALG-5	40X114	1	3788
ALG-6	40X114	1	3988
ALG-7	40X114	1	3988
ALG-8	40X114	1	3988
ATL-1	40X123	1	3988

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40X114	16	3188
BLG-2	40X114	1	3988
BLG-3	40X114	1	3388
BLG-4	40X114	1	3588
BLG-5	40X114	1	3788
BLG-6	40X114	1	3988
BLG-7	40X114	1	3988
BTL-1	40X123	1	3988

# Northern Bunkie 40 (335x299)

## List of all items 3

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1 *	40X114	1	315
1LG-2 *	40X114	1	630
1LG-3 *	40X114	1	944
1LG-4 *	40X114	1	1221
1LG-5 *	40X114	1	1572
1LG-6 *	40X114	1	1887
1LG-7 *	40X114	1	2201
1LG-8 *	40X114	1	2450
1LG-9 *	40X114	1	2829
1LG-10 *	40X114	1	3144
1LG-11 *	40X114	1	3458
1LG-12 *	40X114	1	3544
1LG-13	40X114	2	3544

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40X57	1	3544
4LG-1 *	40X114	1	315
4LG-2 *	40X114	1	630
4LG-3 *	40X114	1	944
4LG-4 *	40X114	1	1221
4LG-5 *	40X114	1	1572
4LG-6 *	40X114	1	1887
4LG-7 *	40X114	1	2201
4LG-8 *	40X114	1	2450
4LG-9 *	40X114	1	2829
4LG-10 *	40X114	1	3144
4LG-11 *	40X114	1	3458
4LG-12 *	40X114	1	3544
4LG-13	40X114	21	3544

Wall 2			
Mark	Profile	Count	Cut Length




2BL-1	40X57	1	2288
2BL-2	40X57	1	406
2LG-1	40X114	9	342
2LG-2	40X114	26	406
2LG-3	40X114	2	3544
2LG-4	40X114	1	3544
2LG-5	40X114	8	2288

Wall 3			
Mark	Profile	Count	Cut Length



3LG-1	40X114	1	3544
3LG-2	40X114	1	3544

\* Gable - delivered premounted

Log profiles	
Profile	Profile

40X57	
40X114	
40X114	

Log profiles	
Profile	Profile


40X123	
40X123	

# Windboard

① Windboard Assembly 1



② Windboard Assembly 2

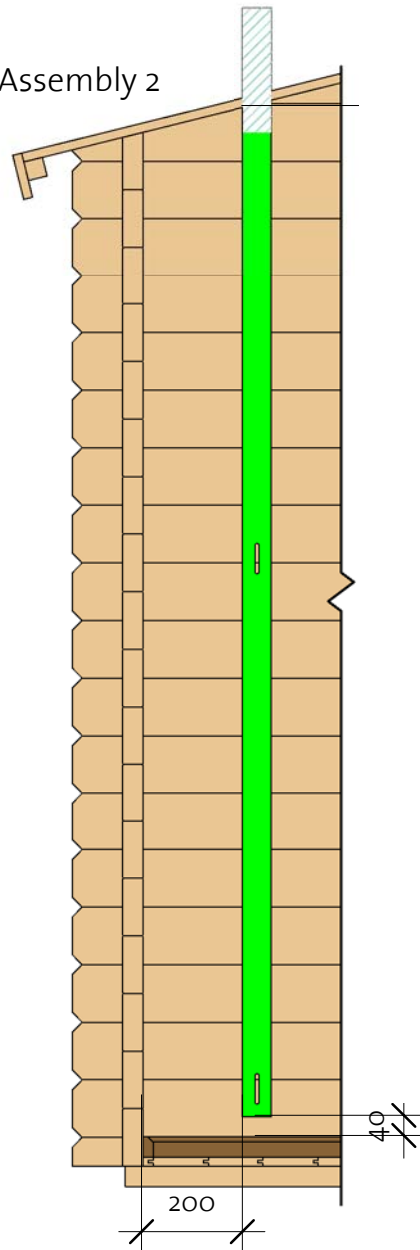

③ Windboard Assembly 3

