

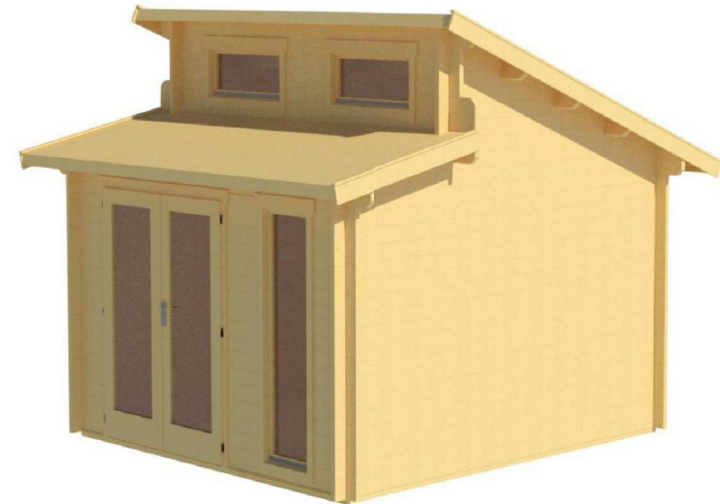
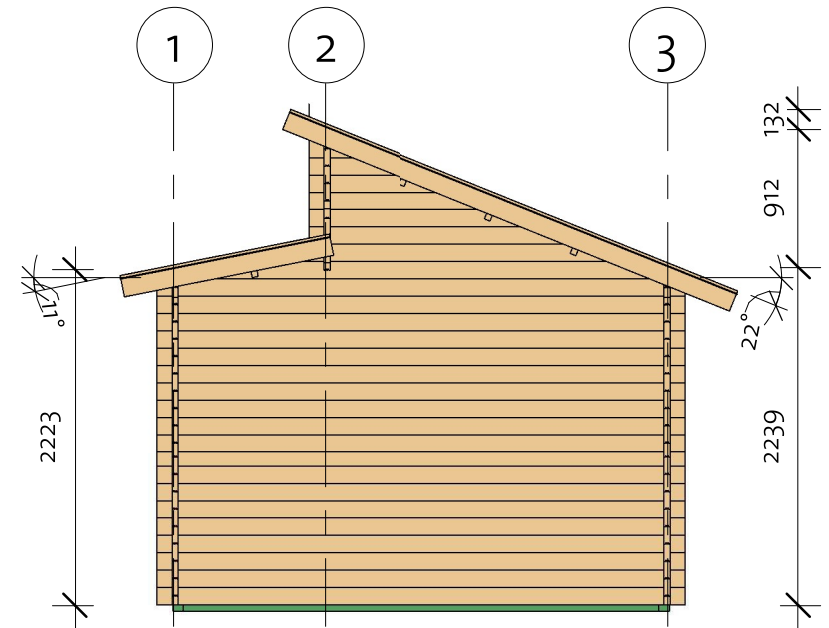



# Omaha 2 40 (304x330)

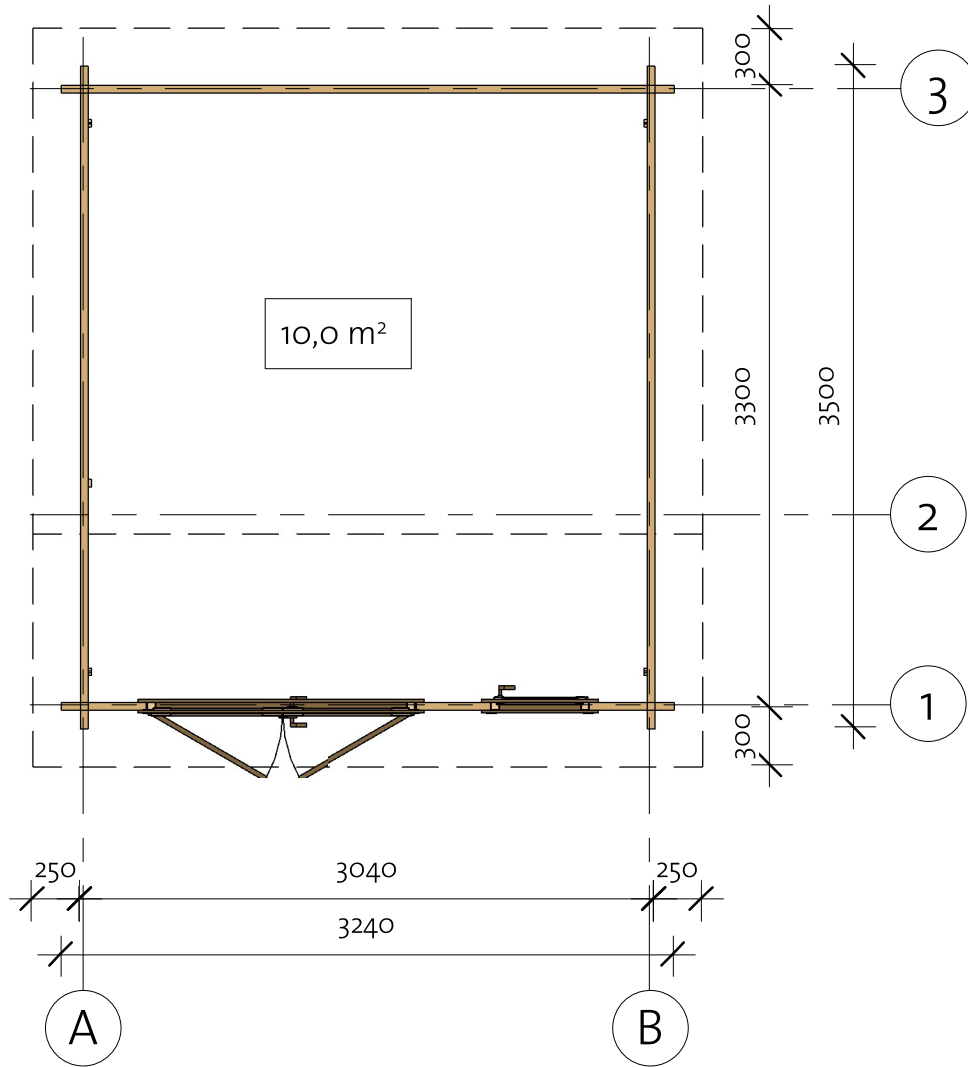

# Omaha 2 40 (304x330)

Foundation

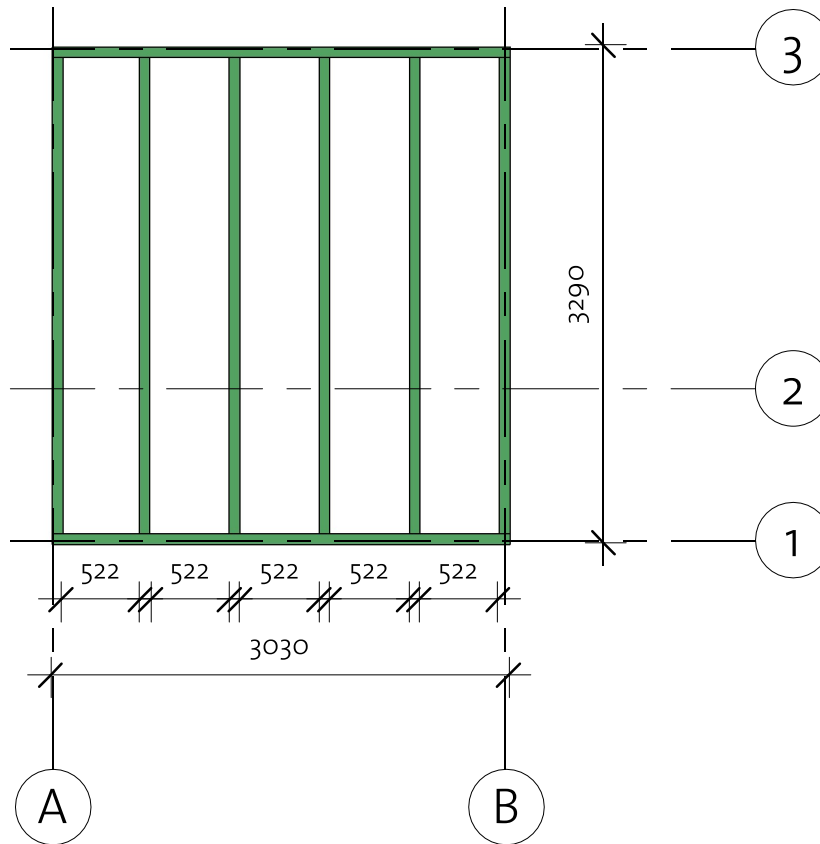


Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		6	3150
IFB2	IFB 70x40		2	3030

# Omaha 2 40 (304x330)


Floor Plan

① Baseboard

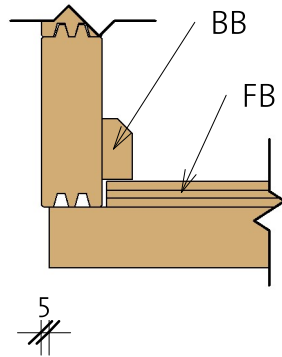


Floor Schedule				
Mark	Type	Profile	Count	Length
FB	FB 17x114		29	2954
BB1	BB 20x40		2	3000
BB2	BB 20x40		2	3300

92006081\_210420

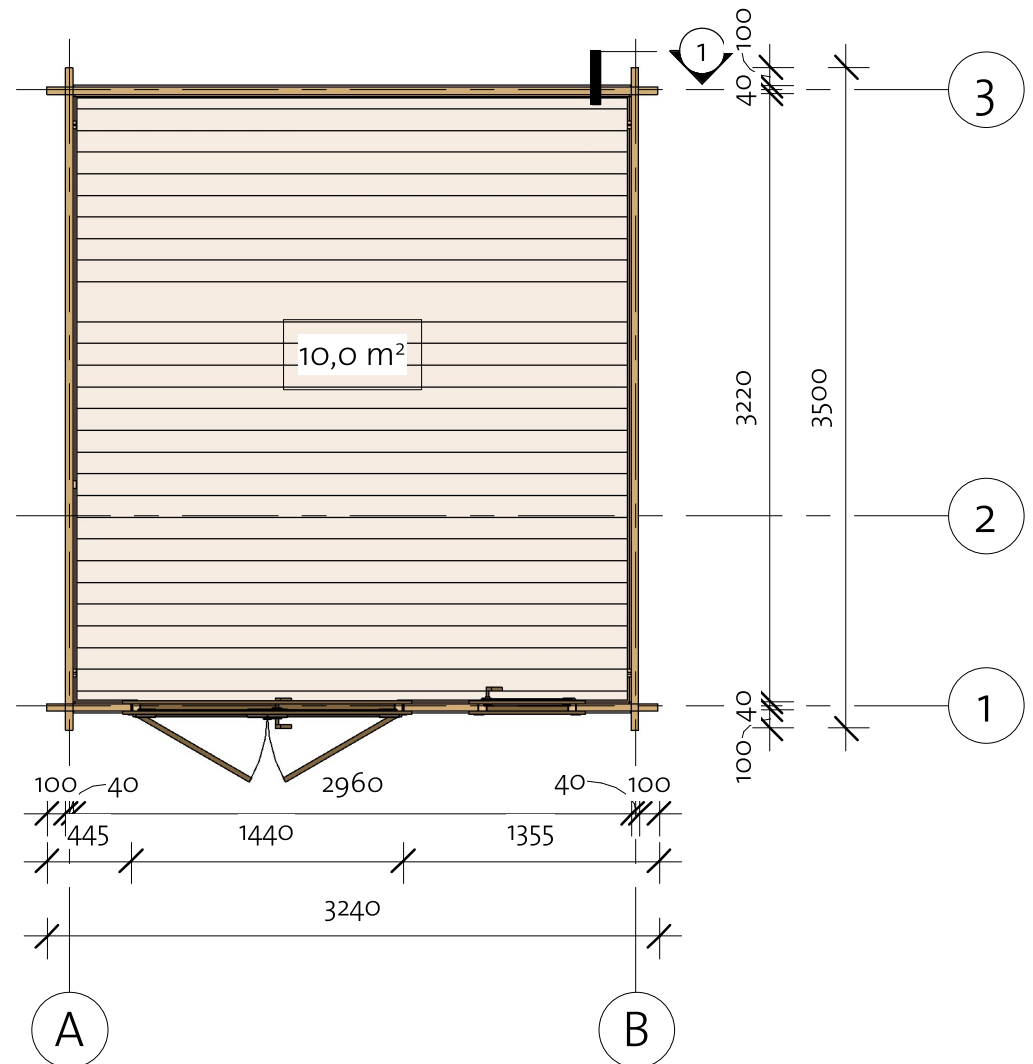


# Omaha 2 40 (304x330)

Wall 1

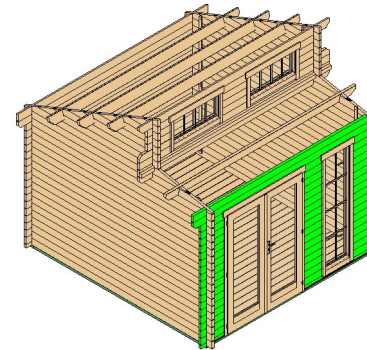

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40X57	1	1355
1BL-2	40X57	1	445
1LG-1	40X114	34	445
1LG-2	40X114	17	390
1LG-3	40X114	1	3540
1TL-1	40X114	1	3540

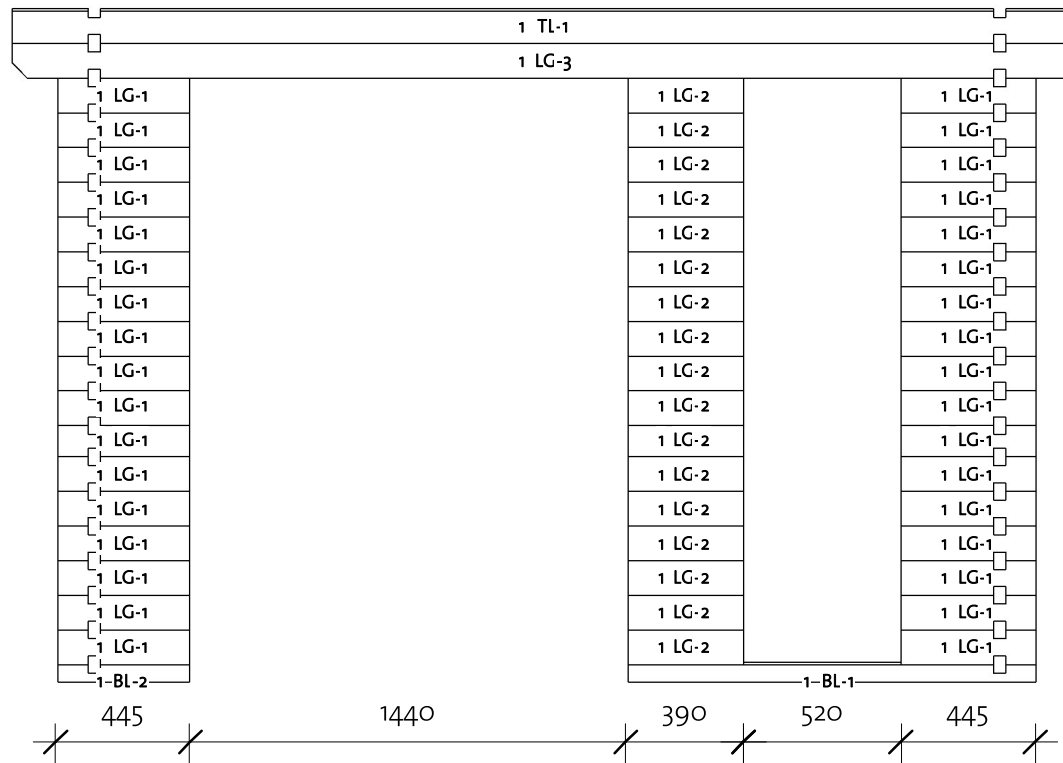


Log Profile Wall 1	
Profile	Profile

40X57	
40X114	
40X114	


# Omaha 2 40 (304x330)

Wall 2

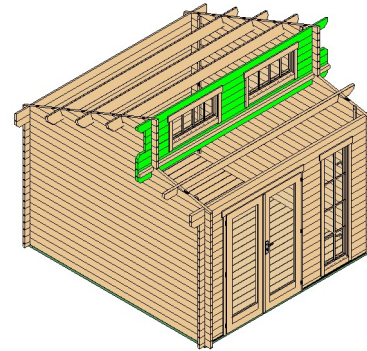

Wall 2			
Mark	Profile	Count	Cut Length

2LG-1	40X114	6	450
2LG-2	40X114	4	500
2LG-3	40X114	2	600
2LG-4	40X114	2	3540
2LG-5	40X114	1	3540
2TL-1	40X130	1	3540

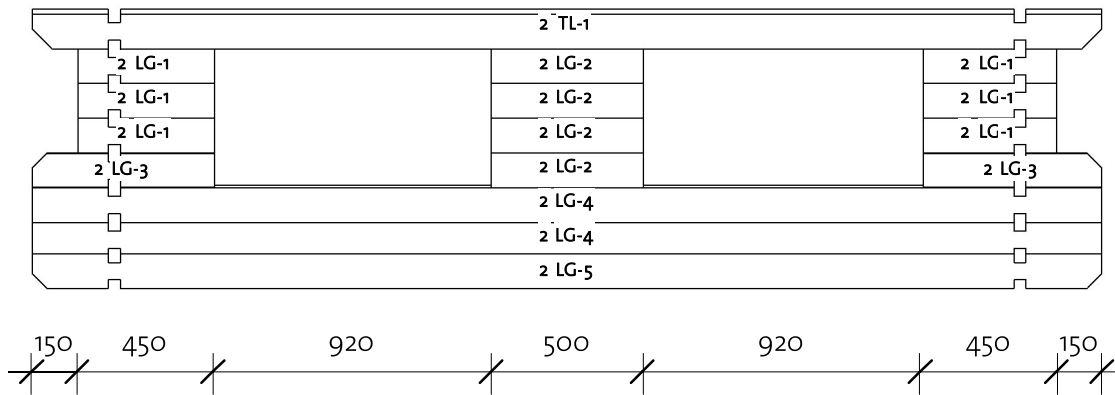


Log Profile Wall 2	
Profile	Profile

40X114	
40X114	
40X130	


# Omaha 2 40 (304x330)

Wall 3

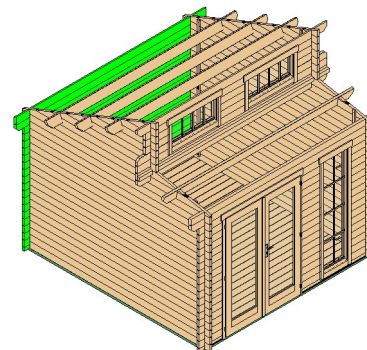

Wall 3			
Mark	Profile	Count	Cut Length

3BL-1	40x57	1	3240
3LG-1	40x114	17	3240
3LG-2	40x114	1	3540
3TL-1	40x130	1	3540


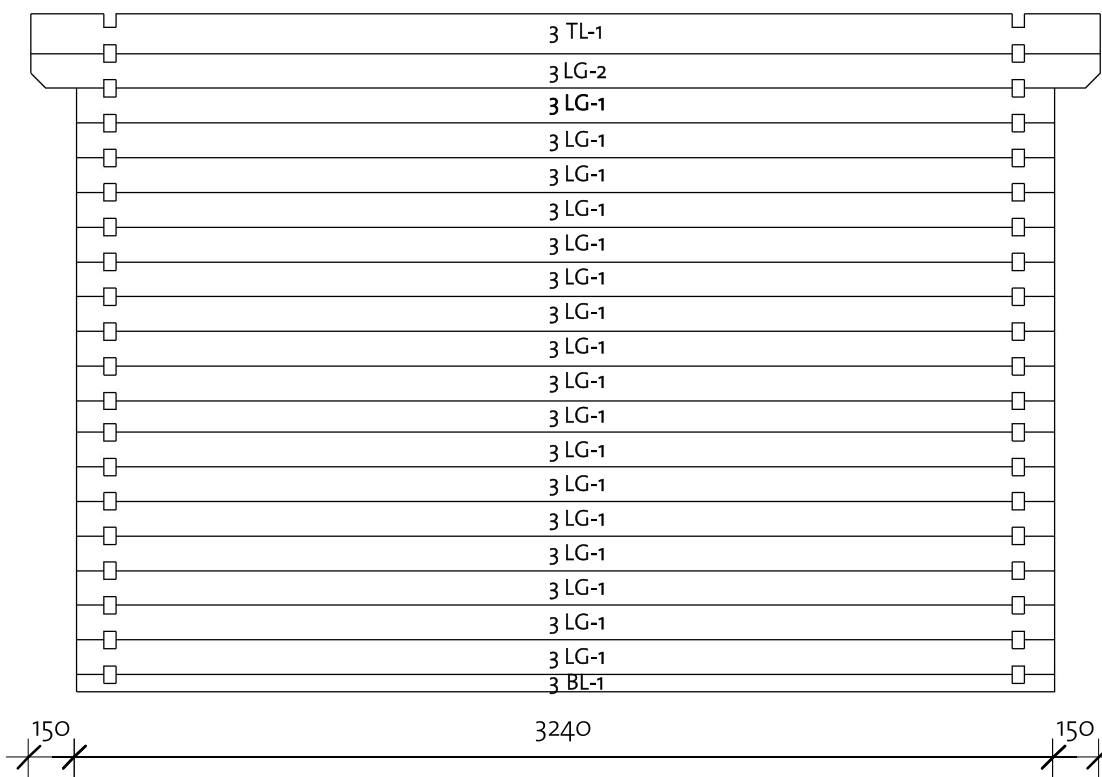


Log Profile Wall 3	
Profile	Profile

40x57	
40x114	
40x130	

# Omaha 2 40 (304x330)

Wall A

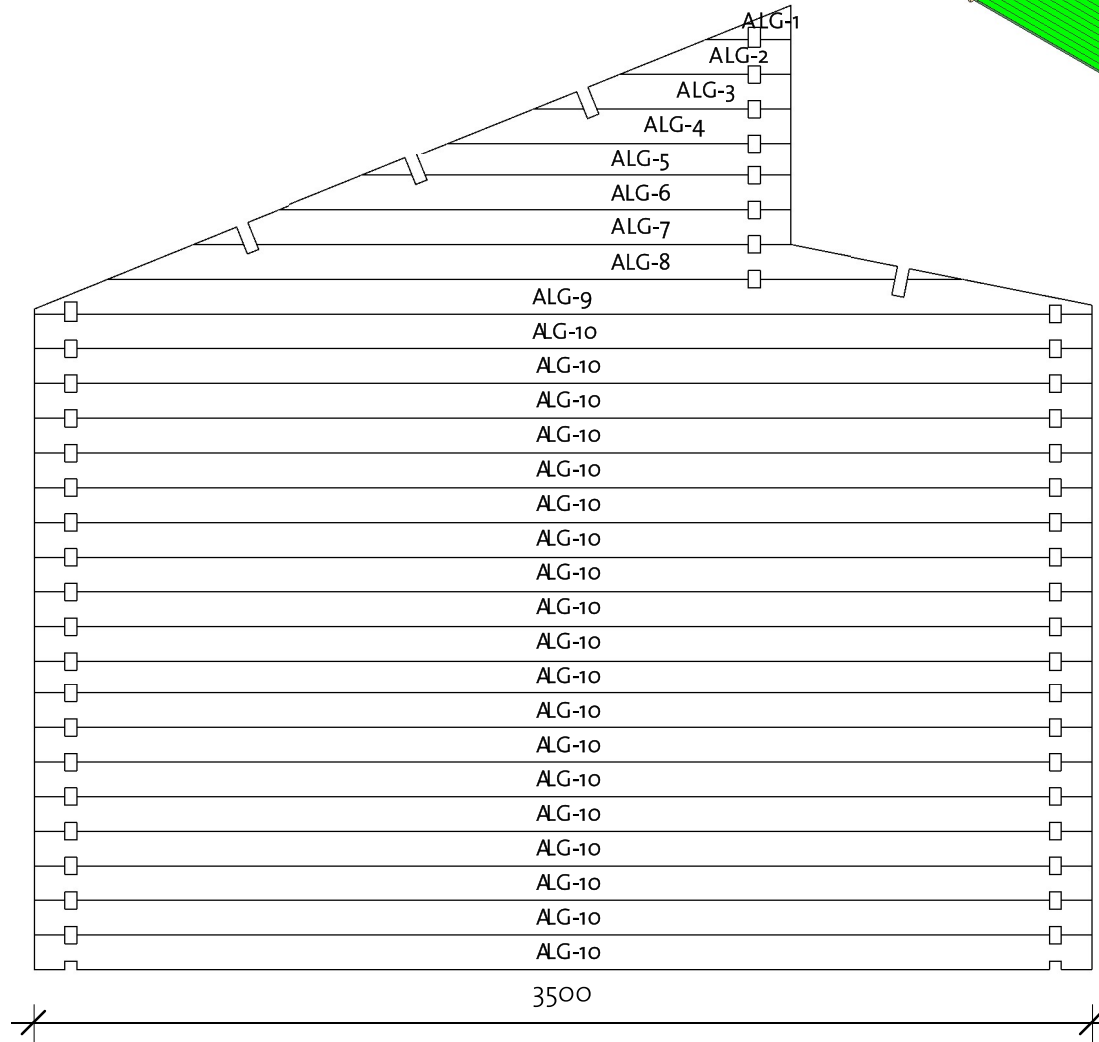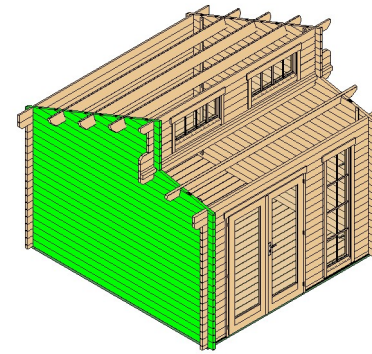


Wall A			
Mark	Profile	Count	Cut Length

ALG-1 *	40x114	1	281
ALG-2 *	40x114	1	563
ALG-3 *	40x114	1	845
ALG-4 *	40x114	1	1127
ALG-5 *	40x114	1	1409
ALG-6 *	40x114	1	1691
ALG-7 *	40x114	1	1974
ALG-8 *	40x114	1	2831
ALG-9 *	40x114	1	3500
ALG-10	40x114	19	3500



\* Gable - delivered premounted

Log Profile Wall A	
Profile	Profile

40x114	
--------	---

# Omaha 2 40 (304x330)

Wall B

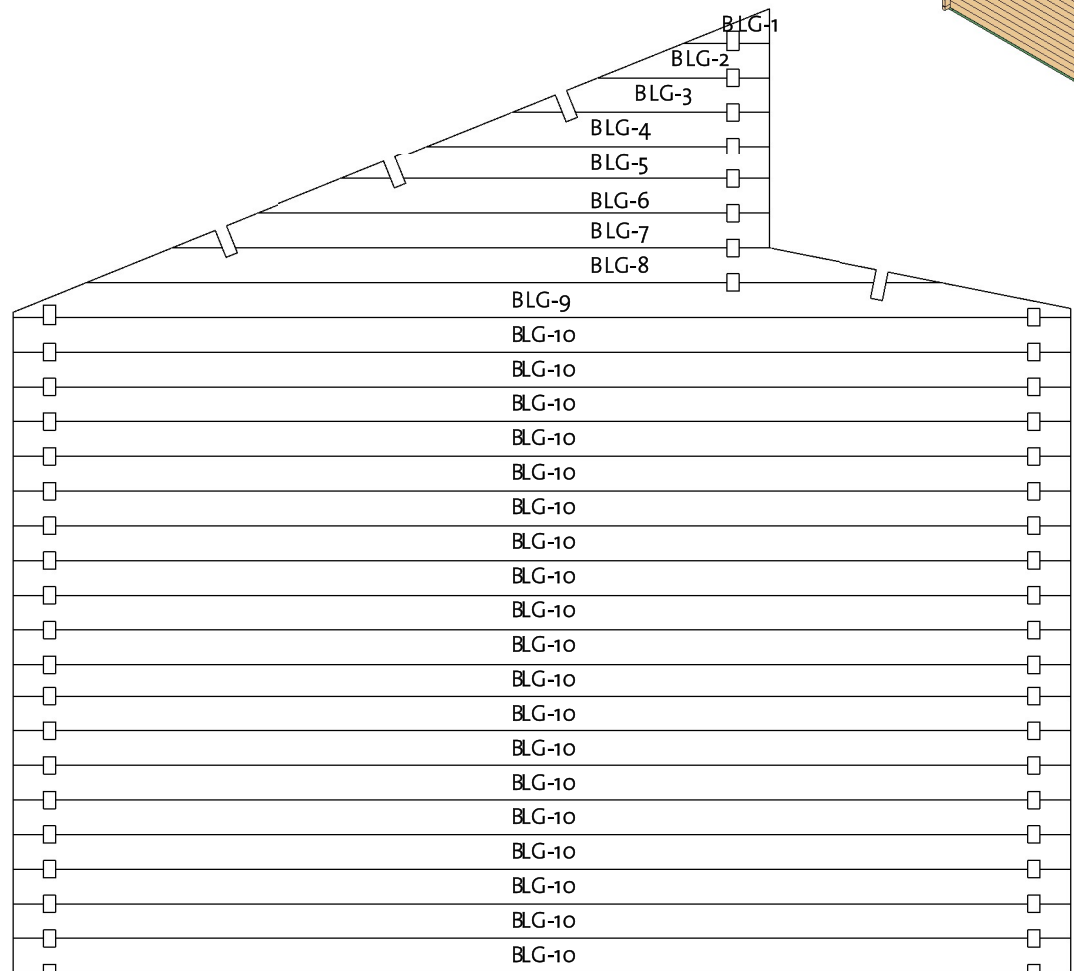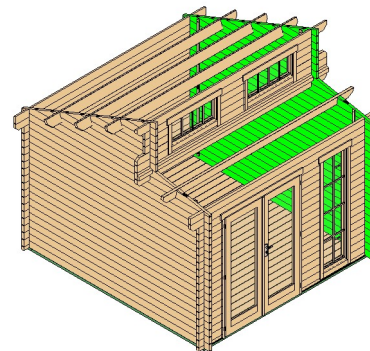


3500

Wall B			
Mark	Profile	Count	Cut Length

BLG-1 *	40X114	1	281
BLG-2 *	40X114	1	563
BLG-3 *	40X114	1	845
BLG-4 *	40X114	1	1127
BLG-5 *	40X114	1	1409
BLG-6 *	40X114	1	1691
BLG-7 *	40X114	1	1974
BLG-8 *	40X114	1	2831
BLG-9 *	40X114	1	3500
BLG-10	40X114	19	3500

\* Gable - delivered premounted


Log Profile Wall B	
Profile	Profile

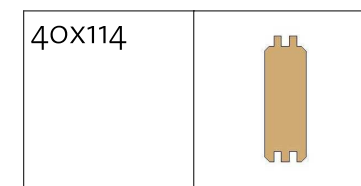






# Omaha 2 40 (304x330)

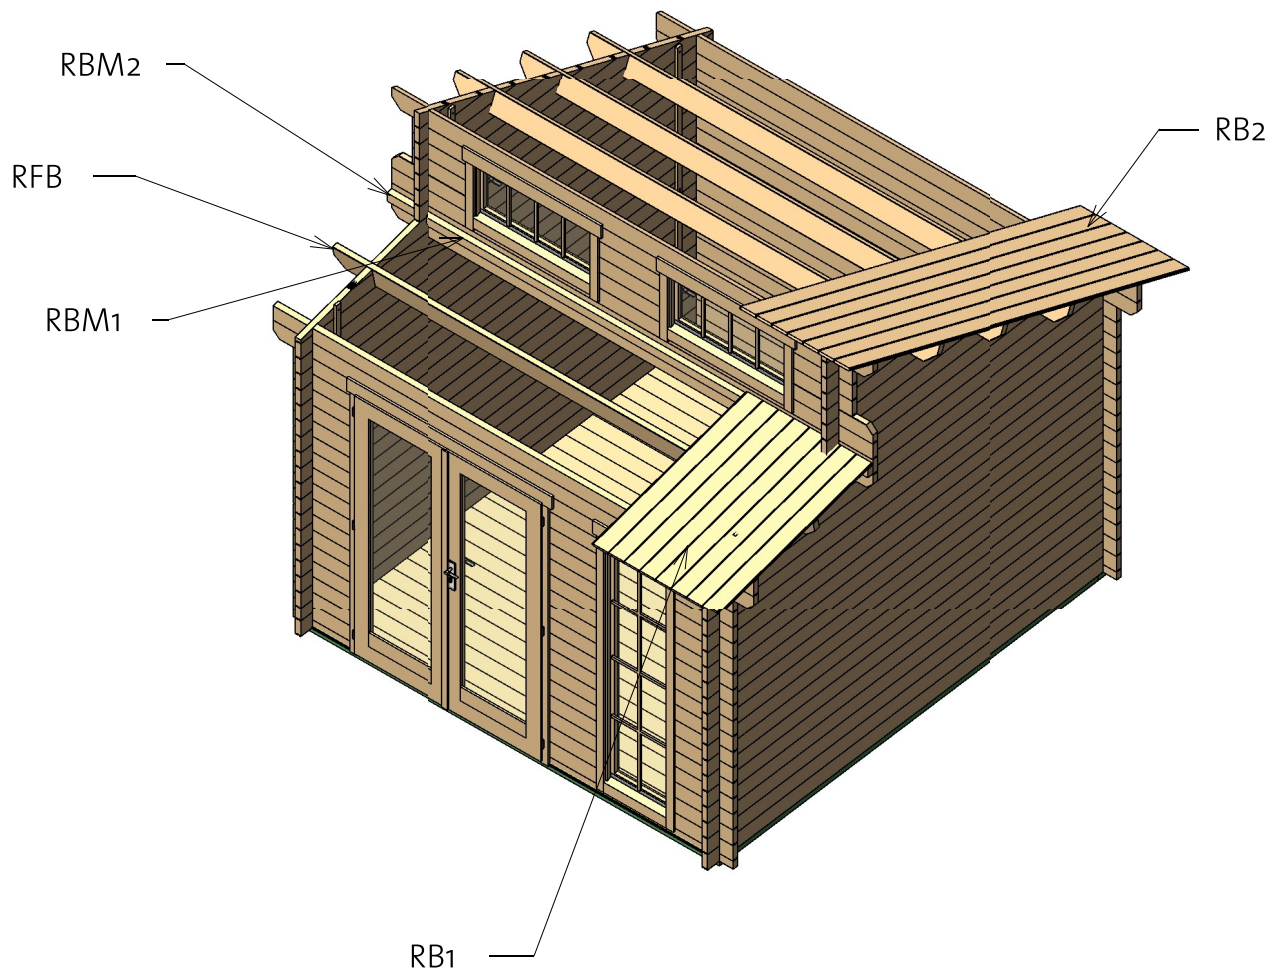
Roof 1





Roof				
Mark	Type	Profile	Count	Length
RB1	17x114		32	1325
RB2	17x114		32	3118
RBM1	Beam 40x70		1	2960
RBM2	Beam 40x70		2	250
RFB	Beam 40x143		4	3540

# Omaha 2 40 (304x330)


Roof 2

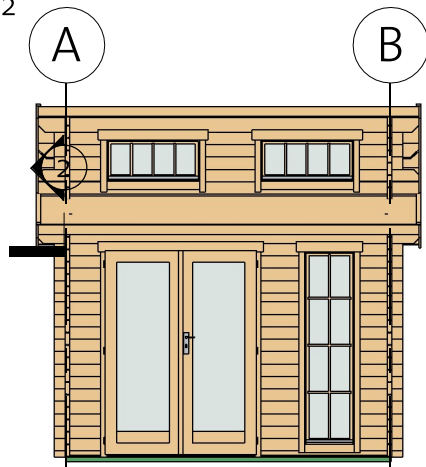

② Facia

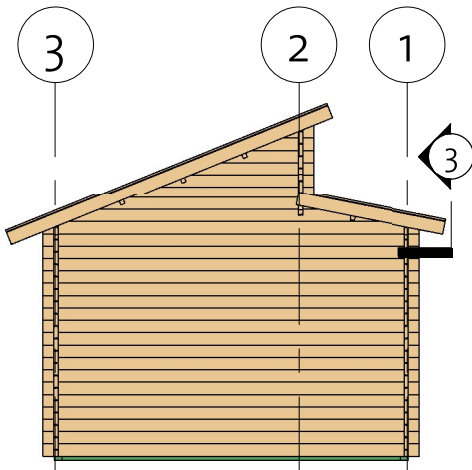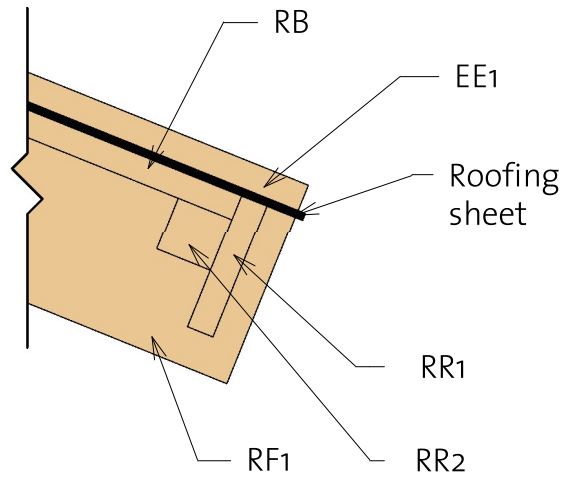

③ Roof Reinforcement

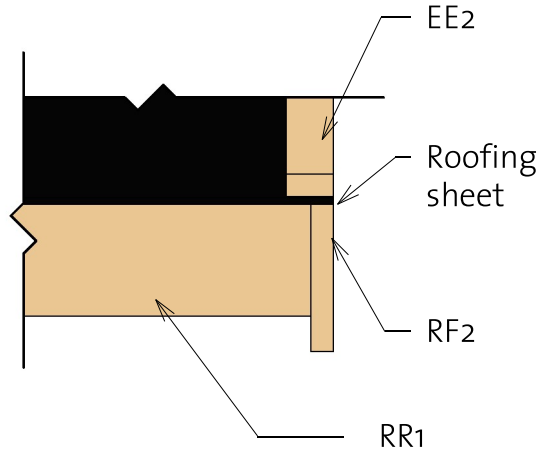


Fascia Schedule

Mark	Type	Profile	Count	Length
EE1	Eave Edging 18x40		2	3193
EE2	Eave Edging 18x40		2	1407
RF1	Roof Fascia 18x120		2	3193
RF2	Roof Fascia 18x120		2	1407
RR1	Roof reinforcement 18x95		3	3540
RR2	Roof reinforcement 38x38		3	3540


# Omaha 2 40 (304x330)

Extras

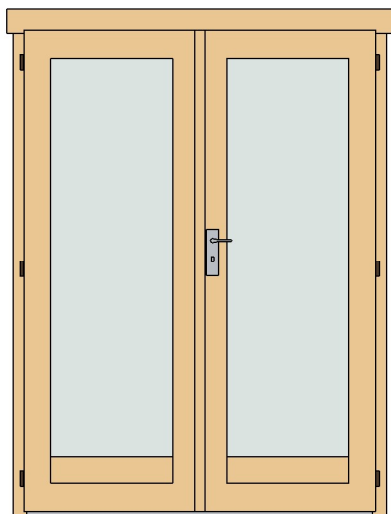

Door Schedule				
Model	Type	Width	Height	Count
CDD3R	Classic double door 3, full glass right	1425	1955	1
DCB8	Door Crossbar 8 optional	--	--	2



Type	Count	Length
Windboard 1 18x40	4	2200
Windboard 2 18x40	2	1000



Window Schedule				
Mark	Type	Width	Height	Count

CW5R	Classic window 5 right	915	420	2
CW21R	Classic window 21 right	515	1890	1

WCB8	Windows Crossbar 8 optional	--	--	1
WCB6	Windows Crossbar 6 optional	--	--	2

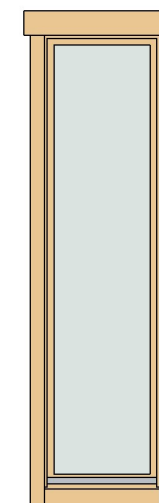

Fasteners/Extras		
Name	Type	Count


Hitblock	300-400 mm	
Bolts	M8x70	16
Screws	5,0 x 70	35
Nails	1,4 x 40	40
Screws	6,0 x 140	70
Screws	4,0 x 40	120
Screws	4,0 x 50	490


92006081\_210420

# Omaha 2 40 (304x330)




## List of all items 1

### Impregnated foundation beams


Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		6	3150
IFB2	IFB 70x40		2	3030

BB1	BB 20x40		2	3000
BB2	BB 20x40		2	3300







### Roof

Mark	Type	Profile	Count	Length
RB1	17x114		32	1325
RB2	17x114		32	3118
RBM1	Beam 40x70		1	2960
RBM2	Beam 40x70		2	250
RFB	Beam 40x143		4	3540

### Floor Schedule

Mark	Type	Profile	Count	Length
FB	FB 17x114		29	2954

### Fascia Schedule

Mark	Type	Profile	Count	Length
EE1	Eave Edging 18x40		2	3193
EE2	Eave Edging 18x40		2	1407
RF1	Roof Fascia 18x120		2	3193
RF2	Roof Fascia 18x120		2	1407
RR1	Roof reinforcement 18x95		3	3540
RR2	Roof reinforcement 38x38		3	3540

# Omaha 2 40 (304x330)

## List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40X57	1	1355
1BL-2	40X57	1	445
1LG-1	40X114	34	445
1LG-2	40X114	17	390
1LG-3	40X114	1	3540
1TL-1	40X114	1	3540

Wall 2			
Mark	Profile	Count	Cut Length

2LG-1	40X114	6	450
2LG-2	40X114	4	500
2LG-3	40X114	2	600
2LG-4	40X114	2	3540
2LG-5	40X114	1	3540
2TL-1	40X130	1	3540

Wall 3			
Mark	Profile	Count	Cut Length

3BL-1	40X57	1	3240
3LG-1	40X114	17	3240
3LG-2	40X114	1	3540
3TL-1	40X130	1	3540

Wall A			
Mark	Profile	Count	Cut Length

ALG-1 *	40X114	1	281
ALG-2 *	40X114	1	563
ALG-3 *	40X114	1	845
ALG-4 *	40X114	1	1127
ALG-5 *	40X114	1	1409
ALG-6 *	40X114	1	1691
ALG-7 *	40X114	1	1974
ALG-8 *	40X114	1	2831
ALG-9 *	40X114	1	3500
ALG-10	40X114	19	3500

Wall B			
Mark	Profile	Count	Cut Length




BLG-1 *	40X114	1	281
BLG-2 *	40X114	1	563
BLG-3 *	40X114	1	845
BLG-4 *	40X114	1	1127
BLG-5 *	40X114	1	1409
BLG-6 *	40X114	1	1691
BLG-7 *	40X114	1	1974
BLG-8 *	40X114	1	2831
BLG-9 *	40X114	1	3500
BLG-10	40X114	19	3500

\* Gable - delivered premounted

# Omaha 2 40 (304x330)

List of all items 3

Log profiles	
Profile	Profile

40x57	
40x130	
40x114	
40x114	