

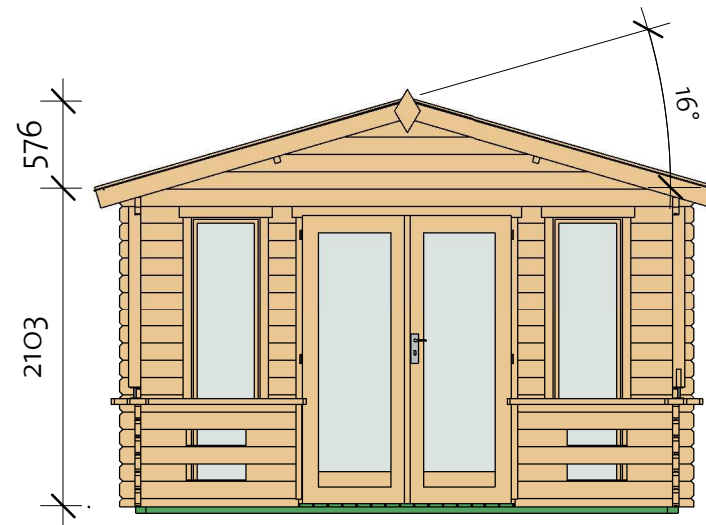


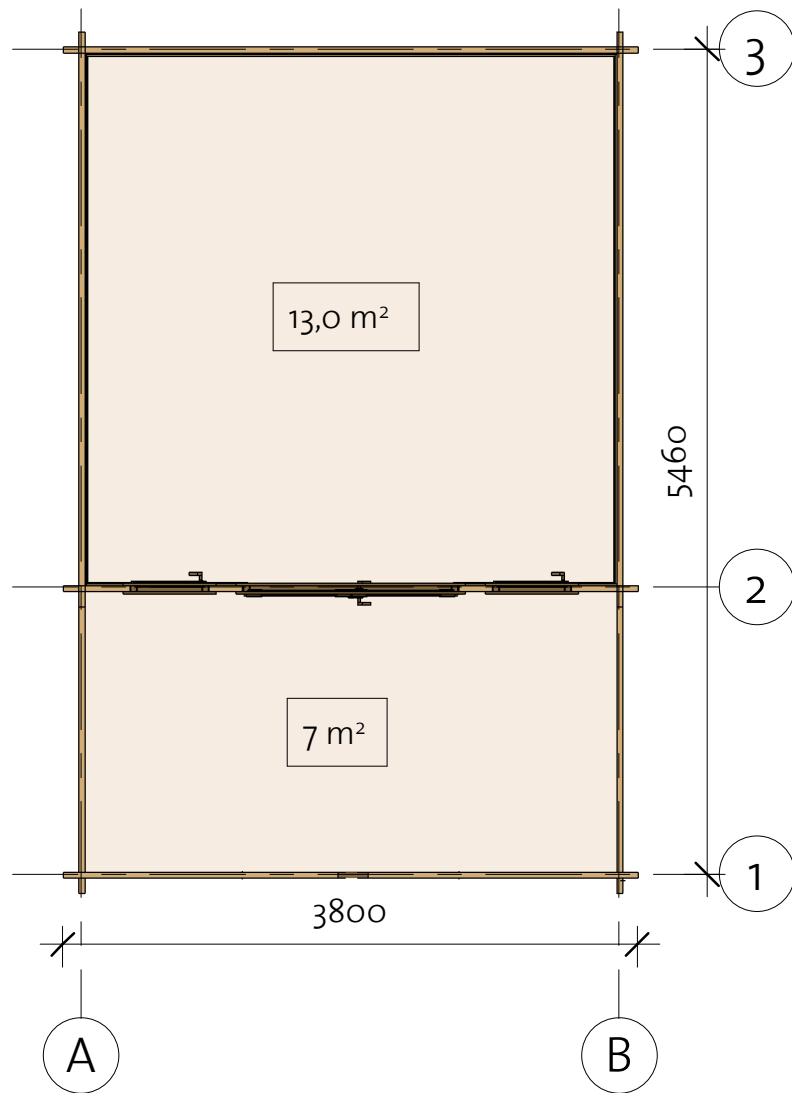

# Kolding 40 (360x360)

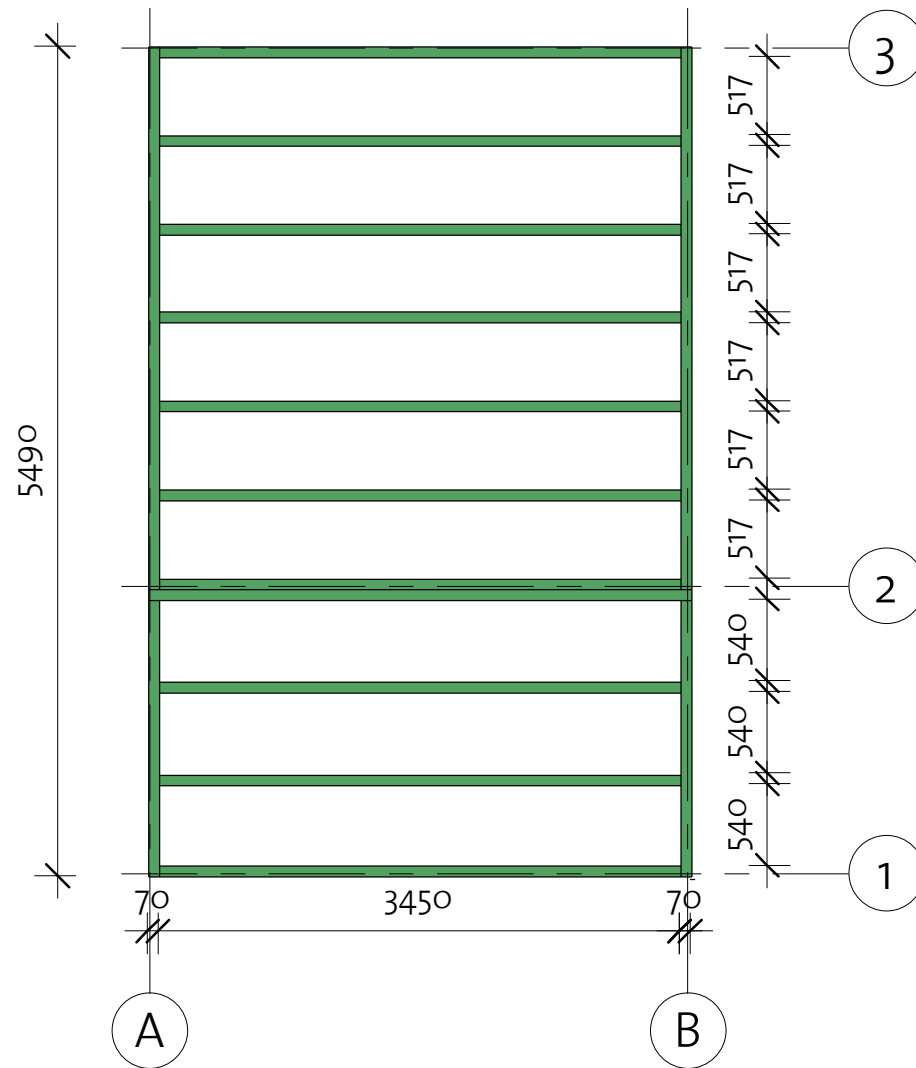

# Kolding 40 (360x360)

Foundation







Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	3589
IFB2	IFB 70x40		10	3450
IFB3	IFB 70x40		1	3590
IFB4	IFB 70x40		2	1831

# Kolding 40 (360x360)



Floor Plan

Floor Schedule				
Mark	Type	Profile	Count	Length

FB	FB 17x114		32	3516
TB 1	TB 21x95		21	1860
TB 2	TB 21x95		16	1900

BB	BB 20x40		4	3600
----	----------	---	---	------


① Baseboard

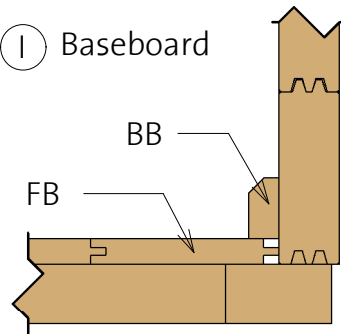

FB  
Floorboard



TB 1  
Terrace board

TB 2  
Terrace board

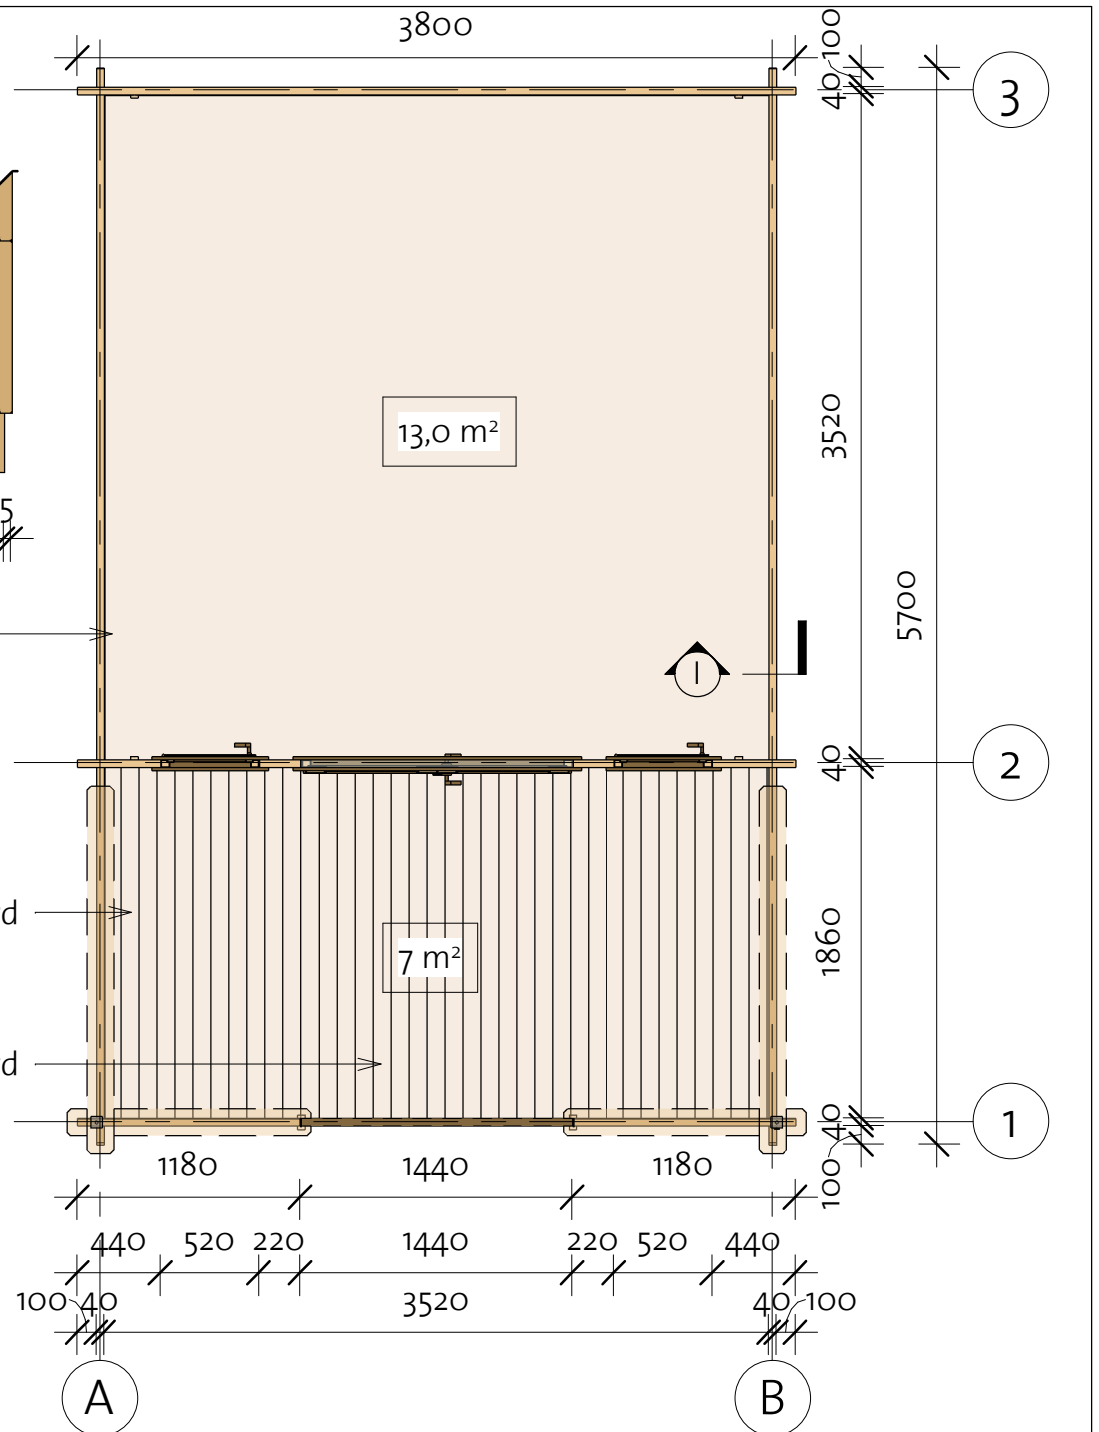

# Kolding 40 (360x360)

Wall 1

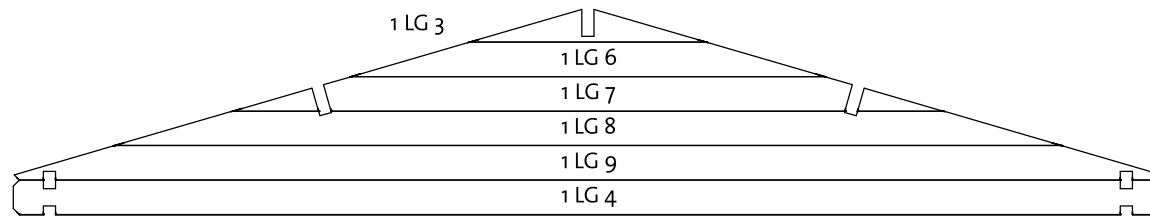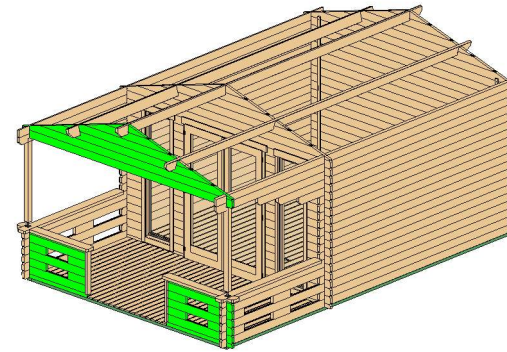


\*Gable-delivered premounted

Wall 1			
Mark	Profile	Count	Cut Length

1BL 1	40x57	2	1180
1LG 1	40x114	4	344
1LG 2	40x114	4	440
1LG 3 *	40x114	1	782
1LG 4	40x114	1	3800
1LG 5	40x114	6	1180
1LG 6 *	40x114	1	1564
1LG 7 *	40x114	1	2347
1LG 8 *	40x114	1	3129
1LG 9 *	40x114	1	3794
1TL 1	40x50	2	1180



Log Profile Wall 1	
Profile	Profile

40x50	
40x57	
40x114	

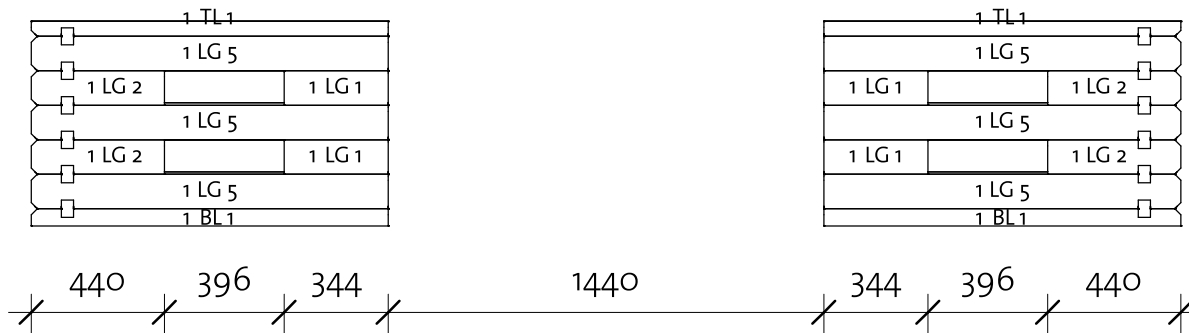

# Kolding 40 (360x360)

Wall 2

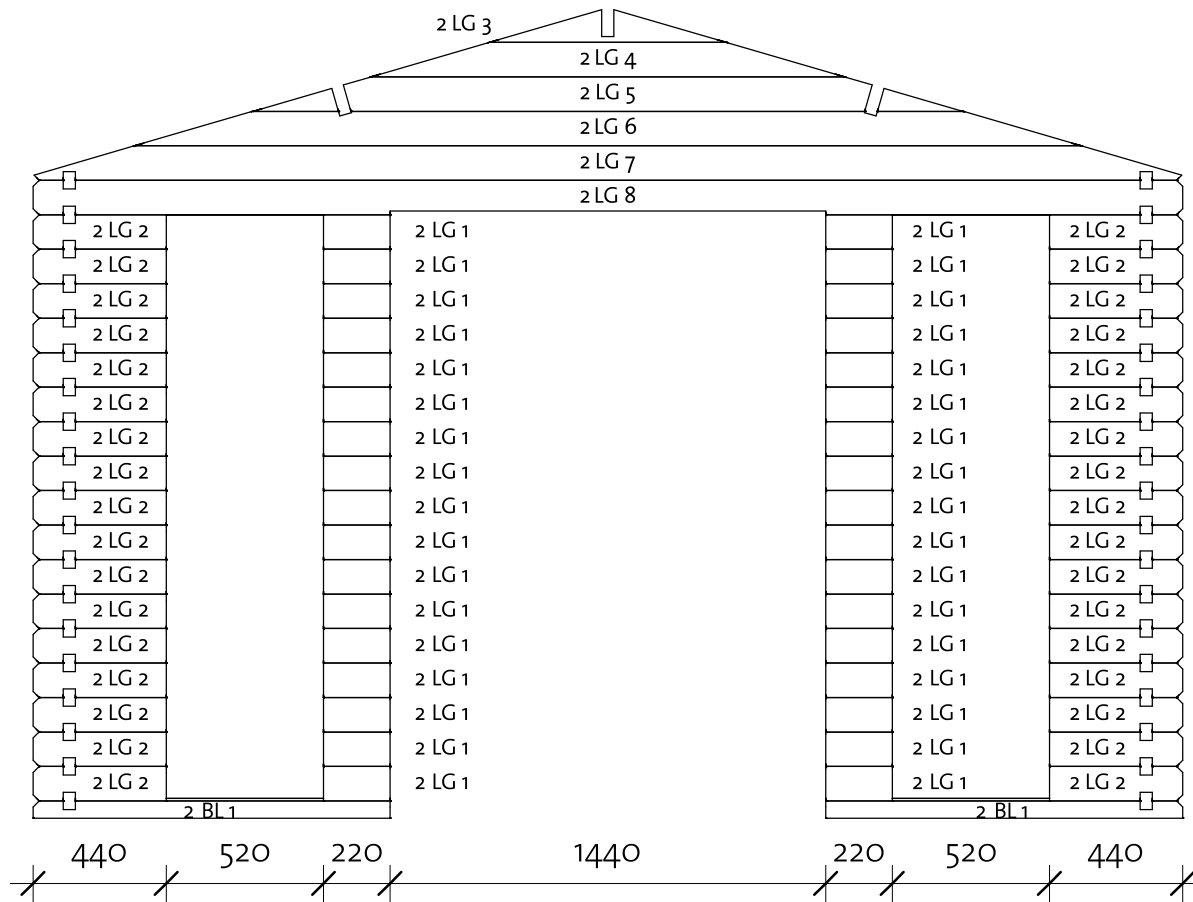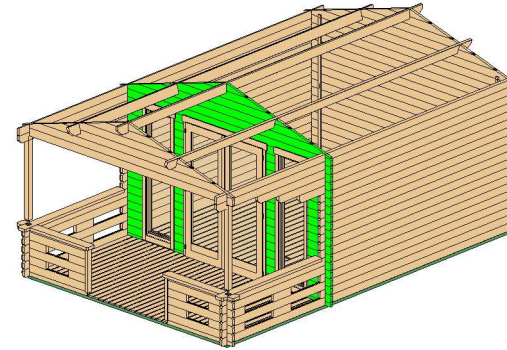



Wall 2			
Mark	Profile	Count	Cut Length

2BL 1	40x57	2	1180
2LG 1	40x114	34	220
2LG 2	40x114	34	440
2LG 3*	40x114	1	782
2LG 4*	40x114	1	1564
2LG 5*	40x114	1	2347
2LG 6*	40x114	1	3129
2LG 7*	40x114	1	3794
2LG 8	40x114	1	3800



\*Gable-delivered premounted

Log Profile Wall 2	
Profile	Profile

40x57	
40x114	

# Kolding 40 (360x360)

Wall 3

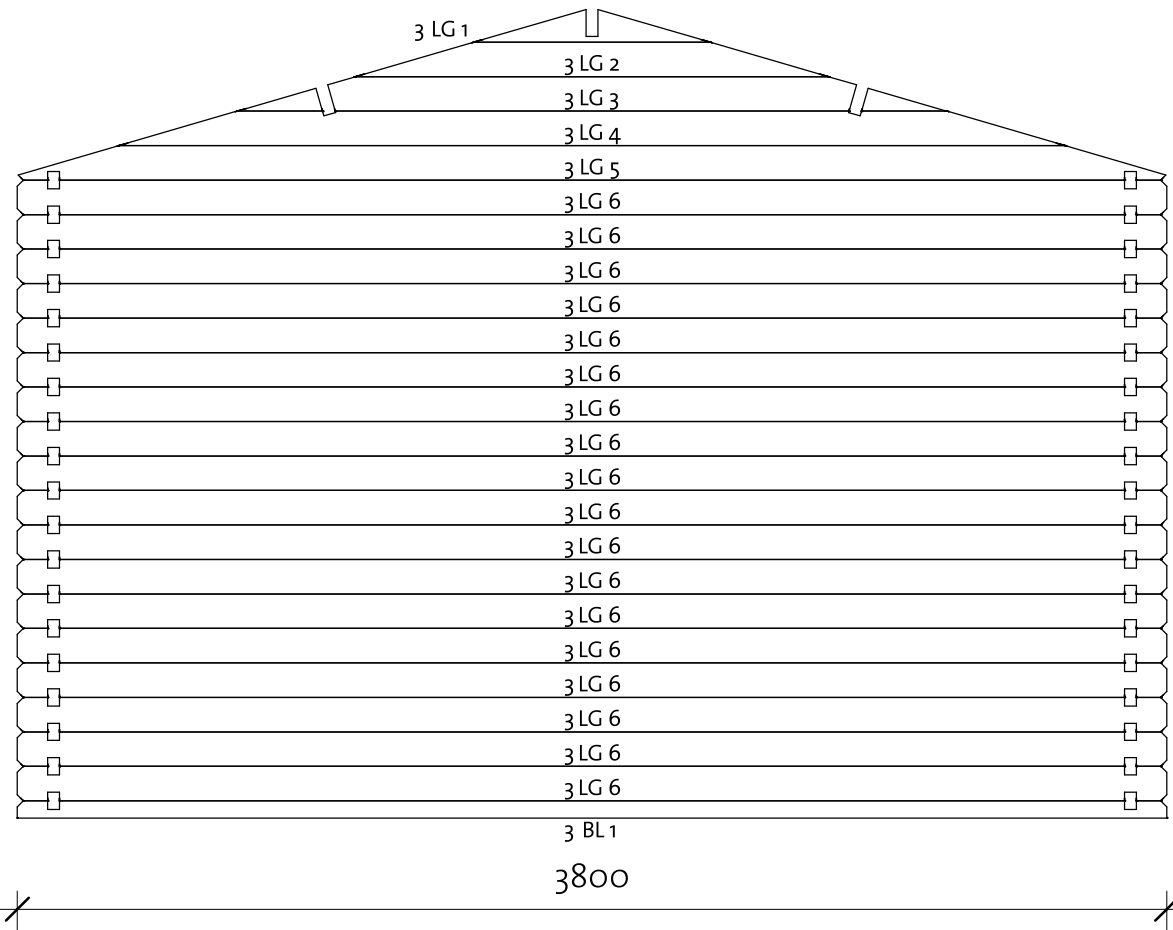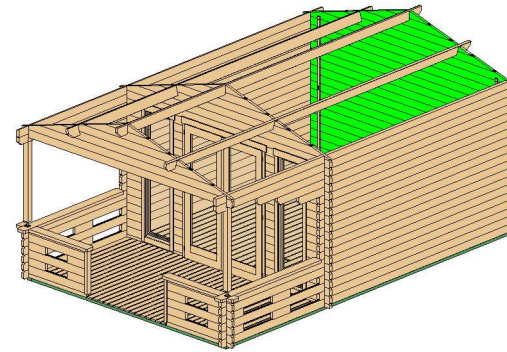

Wall 3			
Mark	Profile	Count	Cut Length

3BL 1	40x57	1	3800
3LG 1 *	40x114	1	782
3LG 2 *	40x114	1	1564
3LG 3 *	40x114	1	2347
3LG 4 *	40x114	1	3129
3LG 5 *	40x114	1	3794
3LG 6	40x114	18	3800


\*Gable-delivered premounted

Log Profile Wall 3	
Profile	Profile

40x57	
40x114	


# Kolding 40 (360x360)

Wall A

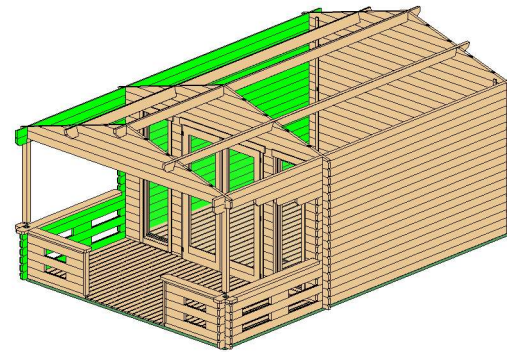

Wall A			
Mark	Profile	Count	Cut Length

ALG 1	40x114	2	344
ALG 2	40x114	2	440
ALG 3	40x114	10	3800
ALG 4	40x114	1	4200
ALG 5	40x114	1	4600
ALG 6	40x114	1	5000
ALG 7	40x114	3	5700
ALG 8	40x114	1	5700
ALG 9	40x114	1	5900
ATL 1	40x114	1	5900

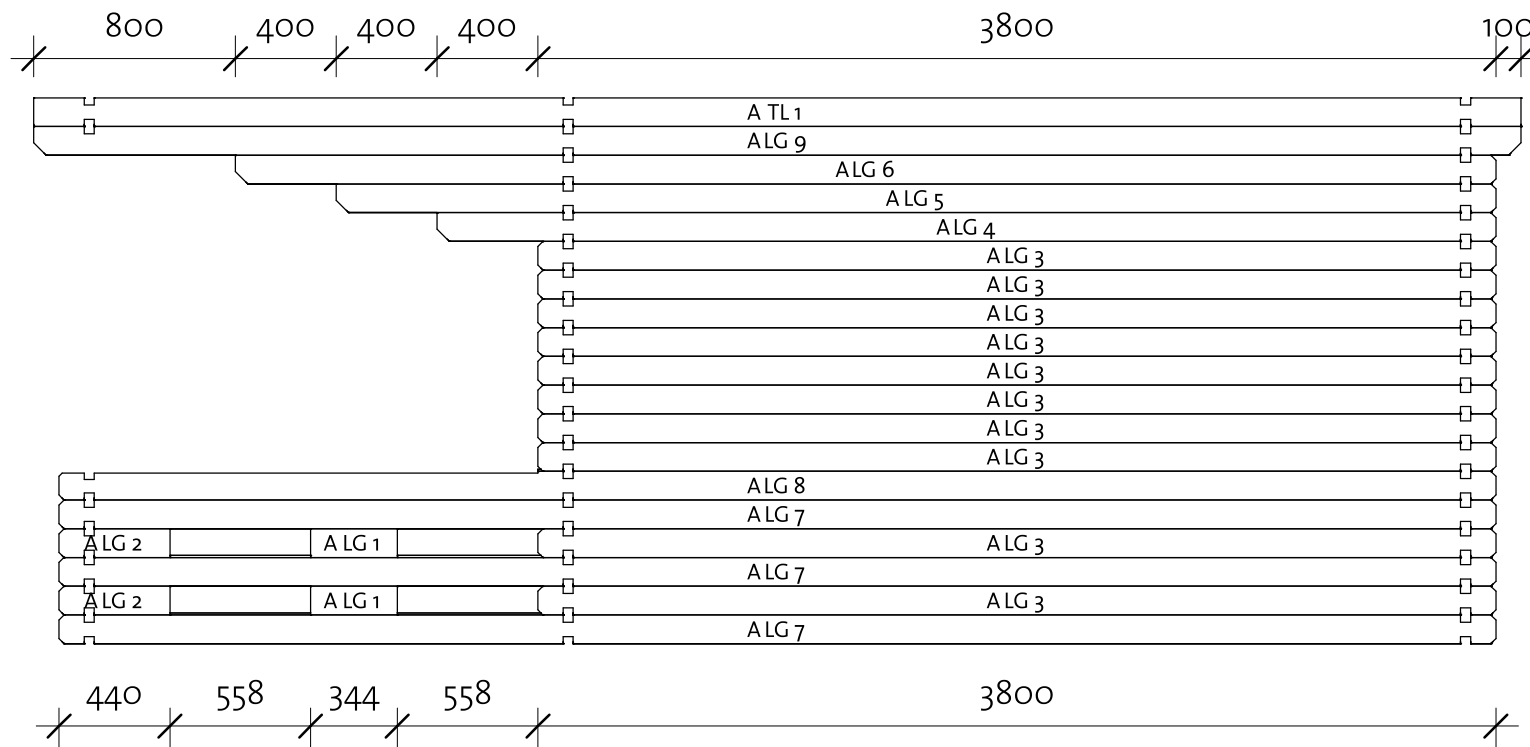


Log Profile Wall A	
Profile	Profile

40x114	
40x114	


# Kolding 40 (360x360)

Wall B

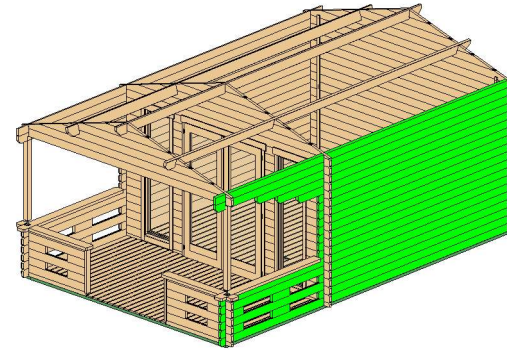

Wall B			
Mark	Profile	Count	Cut Length

BLG 1	40X114	2	344
BLG 2	40X114	2	440
BLG 3	40X114	10	3800
BLG 4	40X114	1	4200
BLG 5	40X114	1	4600
BLG 6	40X114	1	5000
BLG 7	40X114	3	5700
BLG 8	40X114	1	5700
BLG 9	40X114	1	5900
BTL 1	40X114	1	5900

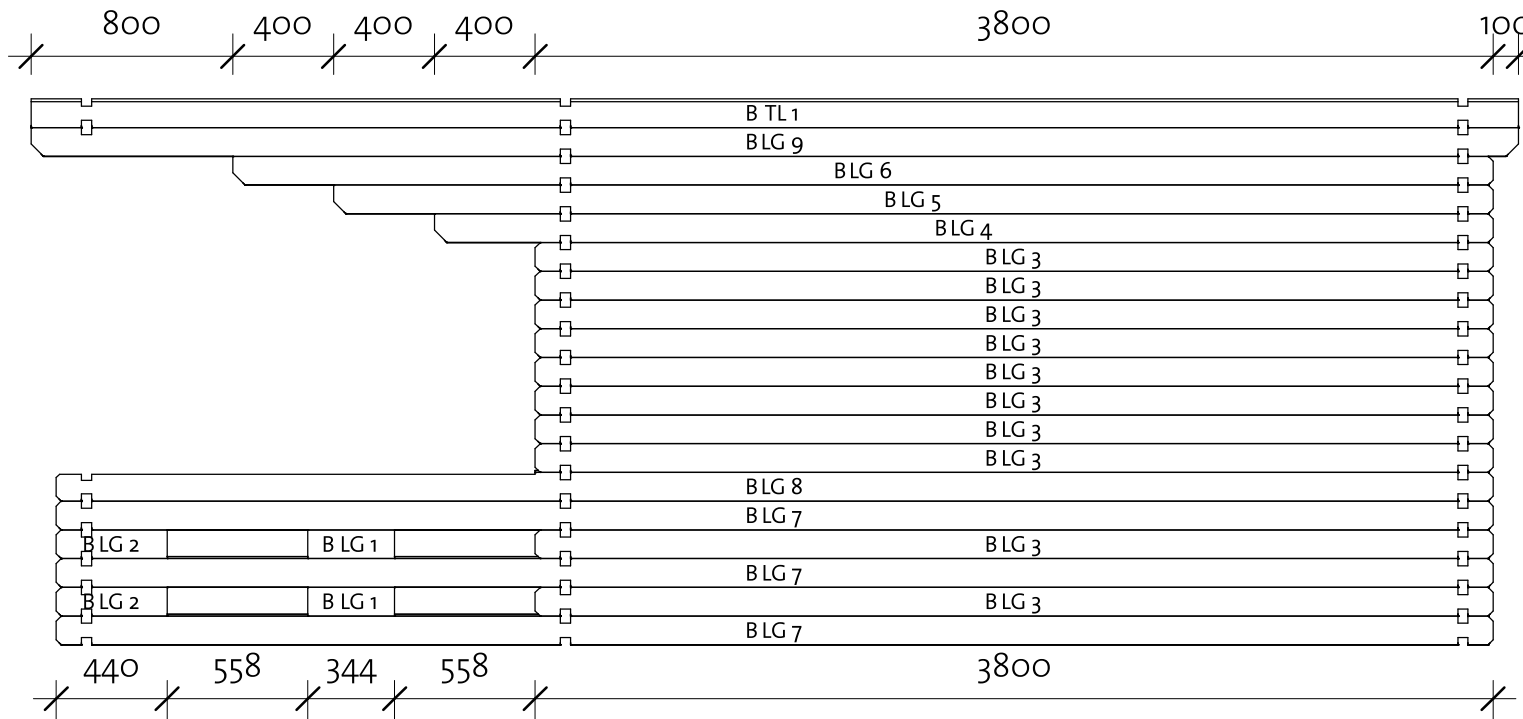


Log Profile Wall B	
Profile	Profile

40X114	
40X114	






# Kolding 40 (360x360)

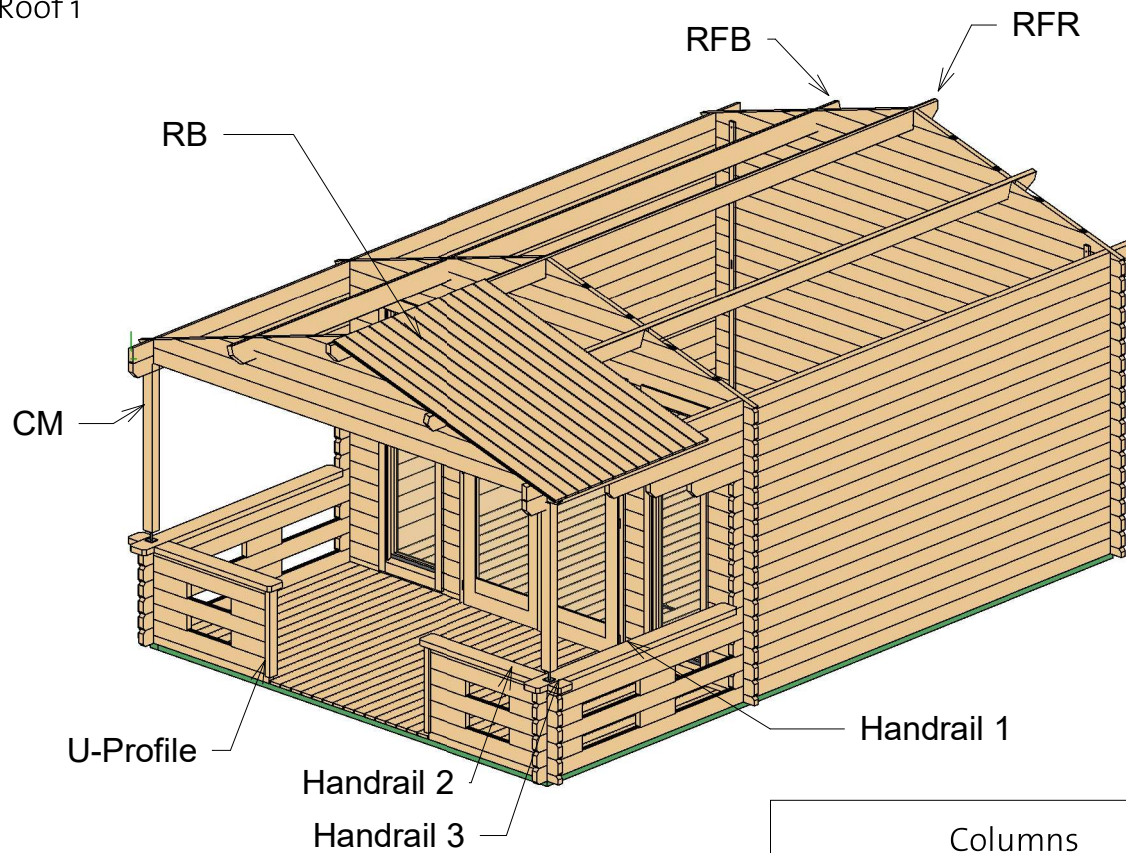Roof 1



Roof				
Mark	Type	Profile	Count	Length

RFR	Ridge 40X143		1	5900
RFB	Beam 40X143		2	5900
RB	17X114		106	2099

U-Profile	40x76	2	625
-----------	-------	---	-----



Columns			
Type	Profile	Count	Length

CM	Post 80x70	2	1203
----	---------------	---	------

Adjustable post foot	2	45
-------------------------	---	----





Type	Profile	Count	Length
------	---------	-------	--------



Handrail 1	40X143	2	1945
Handrail 2	40X143	2	1040
handrail 3	40X143	2	105

# Kolding 40 (360x360)

Roof 2

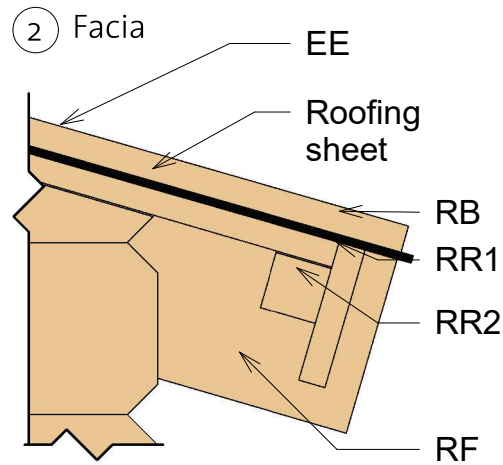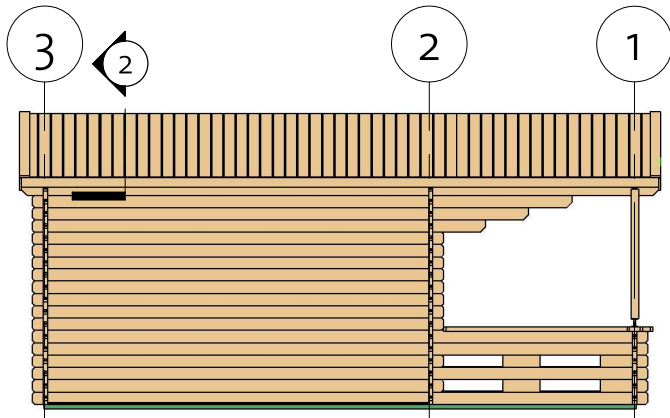

3 Roof Reinforcement

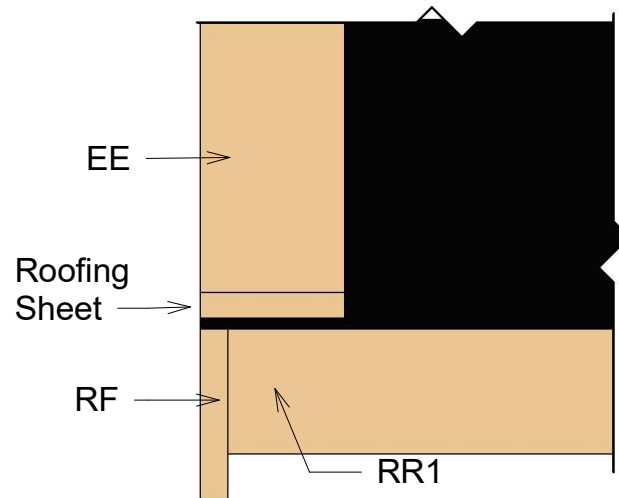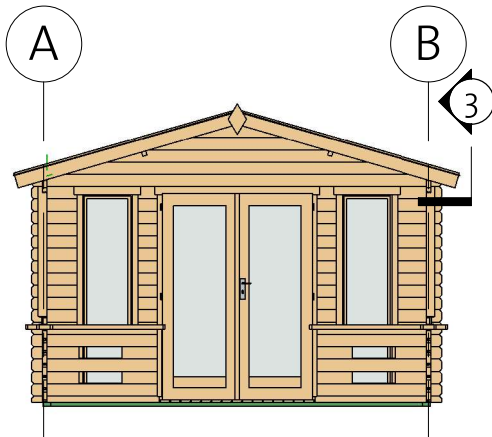


Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	2144
RF	Roof Fascia 18x120		4	2144
RR1	Roof reinforcement 18x95		2	5900
RR2	Roof reinforcement 38x38		2	5900

# Kolding 40 (360x360)

Extras

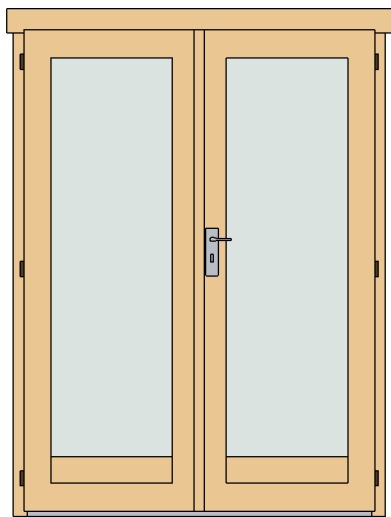

Door Schedule				
Mark	Type	Width	Height	Count

CDD3R	Classic double door 3 right	1425	1955	1
-------	-----------------------------	------	------	---

DCB8	Door Crossbar 8 optional	--	--	2
------	--------------------------	----	----	---

DB	Door beam 1440 mm	40	12	1
----	-------------------	----	----	---

CW21R	Classic window 21 right	515	1890	2
-------	-------------------------	-----	------	---

WCB8	Windows Crossbar 8 optional	--	--	2
------	-----------------------------	----	----	---

Type	Count	Length
------	-------	--------


Windboard 18x40	4	2200
-----------------	---	------

Romb	2
------	---



Fasteners/Extras		
Name	Type	Count

Hitblock	300-400 mm	
Adjustable post foot		2
Bolts	M8 x 70	12
Screws	5,0 x 70	30
Nails	1,4 x 40	35
Screws	6,0 x 140	100
Screws	4,0 x 40	1020





- \* Windows intended for tilt opening only!
- \* Fenster zur Eröffnung nur zum Kippen vorgesehen!
- \* Aknad on ette nähtud ainult kaldu avamiseks!

4200027\_230303

# Kolding 40 (360x360)

## List of all items 1

### Impregnated foundation beams

Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	3589
IFB2	IFB 70x40		10	3450
IFB3	IFB 70x40		1	3590
IFB4	IFB 70x40		2	1831

### Columns





Type	Profile	Count	Length
CM	Post 80x70	2	1203

Type	Profile	Count	Length
------	---------	-------	--------




Handrail 1	40x143	2	1945
Handrail 2	40x143	2	1040
handrail 3	40x143	2	105

U-Profile	40x76	2	625
-----------	-------	---	-----

### Floor Schedule

Mark	Type	Profile	Count	Length
FB	FB 17x114		32	3516
TB 1	TB 21x95		21	1860
TB 2	TB 21x95		16	1900
BB	BB 20x40		4	3600

### Roof

Mark	Type	Profile	Count	Length
RFR	Ridge 40x143		1	5900
RFB	Beam 40x143		2	5900
RB	17x114		106	2099

# Kolding 40 (360x360)

## List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL 1	40x57	2	1180
1LG 1	40x114	4	344
1LG 2	40x114	4	440
1LG 3 *	40x114	1	782
1LG 4	40x114	1	3800
1LG 5	40x114	6	1180
1LG 6 *	40x114	1	1564
1LG 7 *	40x114	1	2347
1LG 8 *	40x114	1	3129
1LG 9 *	40x114	1	3794
1TL 1	40x50	2	1180

Wall 3			
Mark	Profile	Count	Cut Length





3BL 1	40x57	1	3800
3LG 1 *	40x114	1	782
3LG 2 *	40x114	1	1564
3LG 3 *	40x114	1	2347
3LG 4 *	40x114	1	3129
3LG 5 *	40x114	1	3794
3LG 6	40x114	18	3800

\*Gable-delivered premounted

Wall 2			
Mark	Profile	Count	Cut Length

2BL 1	40x57	2	1180
2LG 1	40x114	34	220
2LG 2	40x114	34	440
2LG 3 *	40x114	1	782
2LG 4 *	40x114	1	1564
2LG 5 *	40x114	1	2347
2LG 6 *	40x114	1	3129
2LG 7 *	40x114	1	3794
2LG 8	40x114	1	3800

Fascia Schedule				
Mark	Type	Profile	Count	Length

EE	Eave Edging 18x95		4	2144
RF	Roof Fascia 18x120		4	2144
RR1	Roof reinforcement 18x95		2	5900
RR2	Roof reinforcement 38x38		2	5900

# Kolding 40 (360x360)

## List of all items 3





Wall A			
Mark	Profile	Count	Cut Length

ALG 1	40X114	2	344
ALG 2	40X114	2	440
ALG 3	40X114	10	3800
ALG 4	40X114	1	4200
ALG 5	40X114	1	4600
ALG 6	40X114	1	5000
ALG 7	40X114	3	5700
ALG 8	40X114	1	5700
ALG 9	40X114	1	5900
ATL 1	40X114	1	5900

Wall B			
Mark	Profile	Count	Cut Length

BLG 1	40X114	2	344
BLG 2	40X114	2	440
BLG 3	40X114	10	3800
BLG 4	40X114	1	4200
BLG 5	40X114	1	4600
BLG 6	40X114	1	5000
BLG 7	40X114	3	5700
BLG 8	40X114	1	5700
BLG 9	40X114	1	5900
BTL 1	40X114	1	5900

Log Profiles 1	
Profile	Profile


40X50	
40X57	
40X114	
40X114	

# Windboard

① Windboard Assembly 1



② Windboard Assembly 2

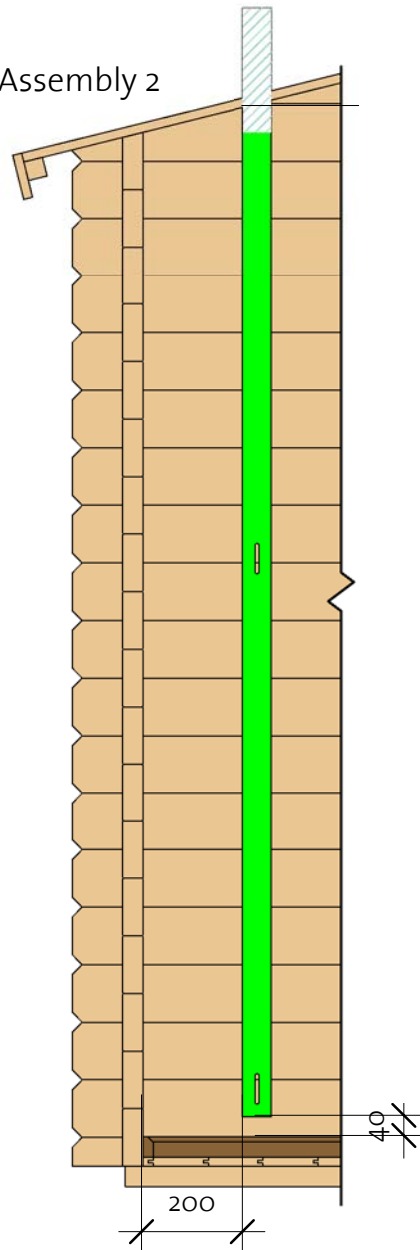

③ Windboard Assembly 3

